


EDI MODEL 2018ECL-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)


REMOVE DIODE JUMPERS I-5,I-6,I-9,I-11,2-5,2-6,2-9,2-11,2-13,3-7,3-8,3-10,3-12,4-7,4-8, 4-10,4-12,5-9,5-11,5-13,6-9,6-11,6-13,7-10,7-12,8-10,8-12,9-11,9-13,10-12, AND 11-13

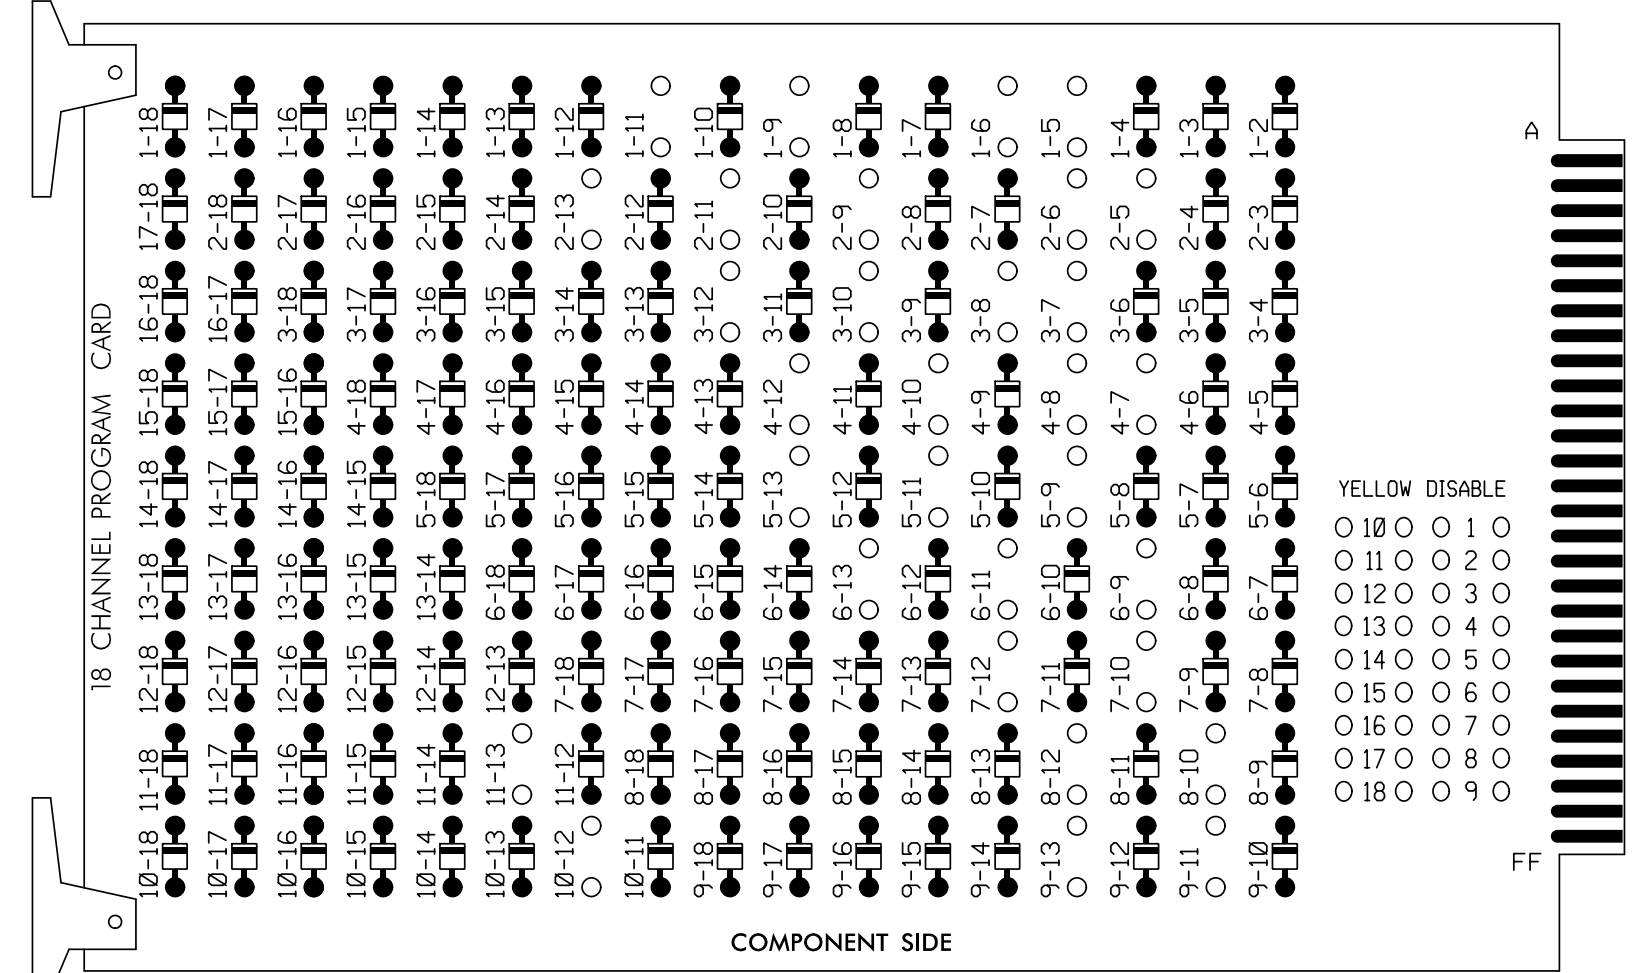

REMOVE JUMPERS AS SHOWN

NOTES:

- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
- Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
- Ensure that Red Enable is active at all times during normal operation.
- Connect serial cable from conflict monitor to comm. port 1 of 2070 controller. Ensure conflict monitor communicates with 2070.

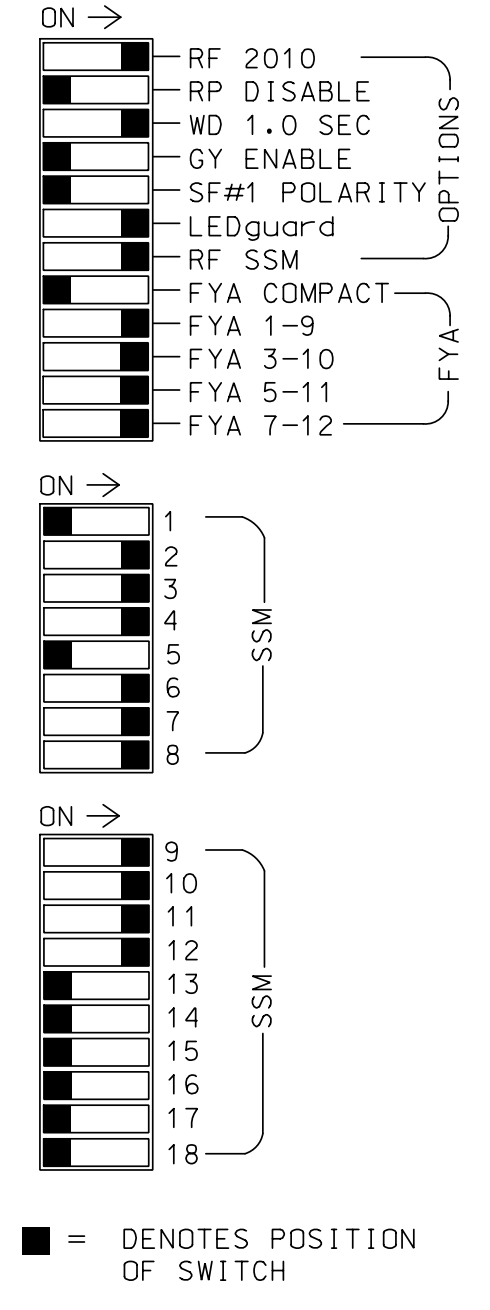

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Program phases 4 and 8 for Dual Entry.
- Enable Simultaneous Gap-Out for all Phases.
- Program phases 2 and 6 for Variable Initial and Gap Reduction.
- Program phases 2 and 6 for Startup In Green.
- Program phase 2 for Startup Ped Call.
- Program phases 2 and 6 for Yellow Flash, and overlaps 1 and 2 as Wag Overlaps.
- The cabinet and controller are part of the Signal System #: D08 25-Pittsboro

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/ AUX
 SOFTWARE.....ECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S7,S8,S10,S11,
 AUX S1,AUX S2,AUX S4,AUX S5
 PHASES USED.....1,2,2PED,3,4,5,6,7,8
 OVERLAP "A".....1+2
 OVERLAP "B".....3+4
 OVERLAP "C".....5+6
 OVERLAP "D".....7+8

PROJECT REFERENCE NO.	SHEET NO.
36249.3857	SIG. 1.1

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11	21,22	P21, P22	22	31	41,42	51	61,62	71	81,82	91	101	11	31	NU	51	71	NU
RED	128			*	101			134		*	107							
YELLOW	*	129			102		*	135			108							
GREEN		130			103			136			109							
RED ARROW													A121	A124		A114	A101	
YELLOW ARROW				117						123			A122	A125		A115	A102	
FLASHING YELLOW ARROW													A123	A126		A116	A103	
GREEN ARROW	127			118	118			133		124	124							
Hand icon																		
Person icon																		

NU = Not Used
 * Denotes install load resistor. See load resistor installation detail this sheet.
 ★ See pictorial of head wiring in detail this sheet.

INPUT FILE CONNECTION & PROGRAMMING CHART


LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
1A ¹	TB2-1,2	I1U	56	18	1	1	Y	Y			15
	-	J4U	48	10★	26	6	Y	Y	Y		3
	-	I1U	56	18★	51	1	Y	Y			
2A/S7	TB2-5,6	I2U	39	1	2	2/SYS	Y	Y			
2B/S8	TB2-7,8	I2L	43	5	12	2/SYS	Y	Y			
3A ²	TB4-5,6	I5U	58	20	3	3	Y	Y			15
	-	J8U	50	12★	28	8	Y	Y			
	-	I5U	58	20★	53	3	Y	Y			
4A	TB4-9,10	I6U	41	3	4	4	Y	Y			10
5A ³	TB3-1,2	J1U	55	17	5	5	Y	Y			15
	-	I4U	47	9★	22	2	Y	Y	Y		3
	-	J1U	55	17★	55	5	Y	Y			
6A/S11	TB3-5,6	J2U	40	2	6	6/SYS	Y	Y			
6B/S12	TB3-7,8	J2L	44	6	16	6/SYS	Y	Y			
7A ⁴	TB5-5,6	J5U	57	19	7	7	Y	Y			15
	-	I8U	49	11★	24	4	Y	Y			3
	-	J5U	57	19★	57	7	Y	Y			3
8A	TB5-9,10	J6U	42	4	8	8	Y	Y			10
* S9	TB6-9,10	I9U	60	22	11	SYS					
* S10	TB6-11,12	I9L	62	24	13	SYS					
PED PUSH BUTTONS											
P21,P22	TB8-4,6	I12U	67	29	PED 2	2 PED					

NOTE:
 INSTALL DC ISOLATOR IN INPUT FILE SLOT 112.

* System detector only. Remove the vehicle phase assigned to this detector in the default programming.

- Add jumper from I1-W to J4-W, on rear of input file.
- Add jumper from I5-W to J8-W, on rear of input file.
- Add jumper from J1-W to I4-W, on rear of input file.
- Add jumper from J5-W to I8-W, on rear of input file.

* See Input Page Assignment programming details on sheets 3, 4, 5, and 6.

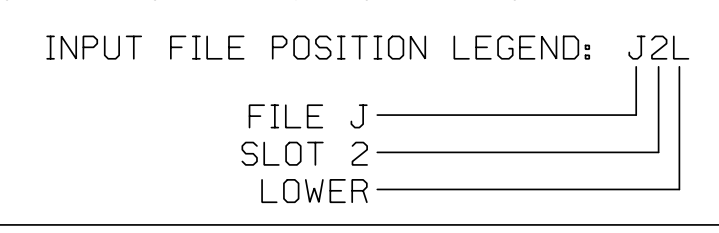


COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

INPUT FILE POSITION LAYOUT

(front view)

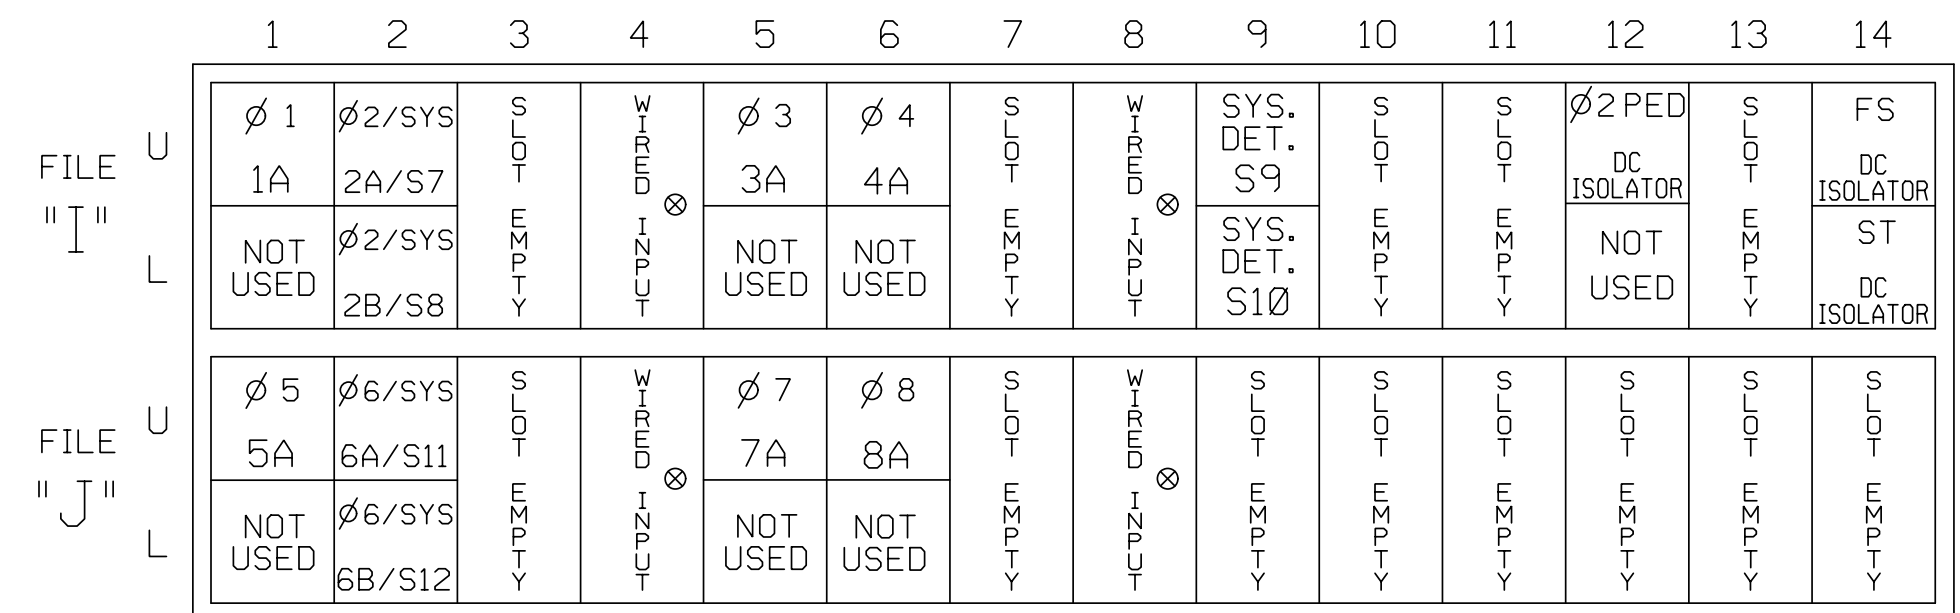


EX.: 1A, 2A, ETC. = LOOP NO.'S
 FS = FLASH SENSE
 ST = STOP TIME

⊗ Wired Input - Do not populate slot with detector card

LOAD RESISTOR INSTALLATION DETAIL

(install resistors as shown below)


VALUE (ohms)	WATTAGE
1.5K - 1.9K	25W (min)
2.0K - 3.0K	10W (min)

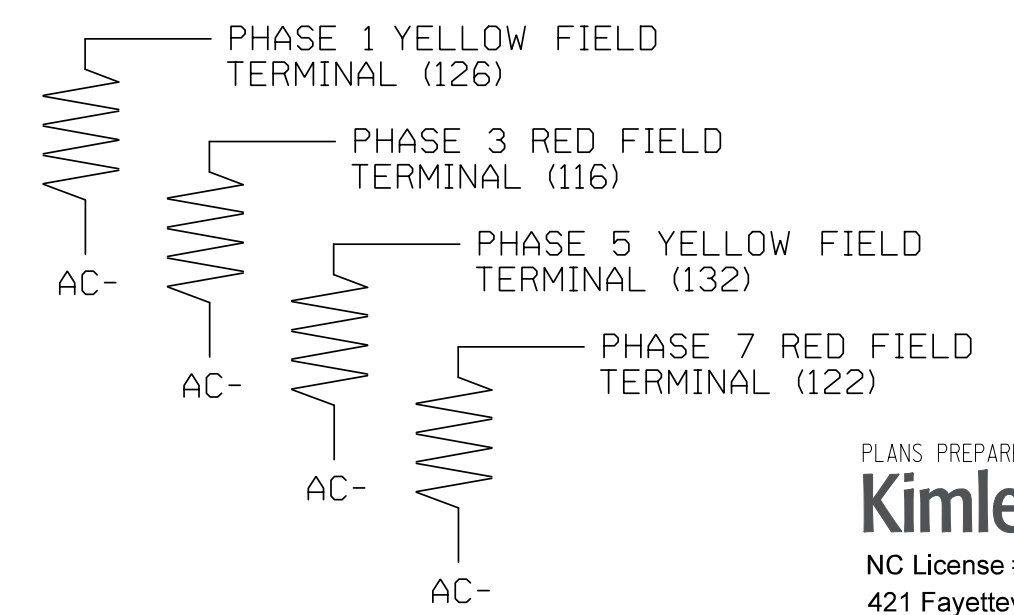

PLANS PREPARED IN THE OFFICE OF:
Kimley Horn
 NC License #F-0102
 421 Fayetteville Street, Suite 600
 Raleigh, NC 27601
 (919) 671-2000

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

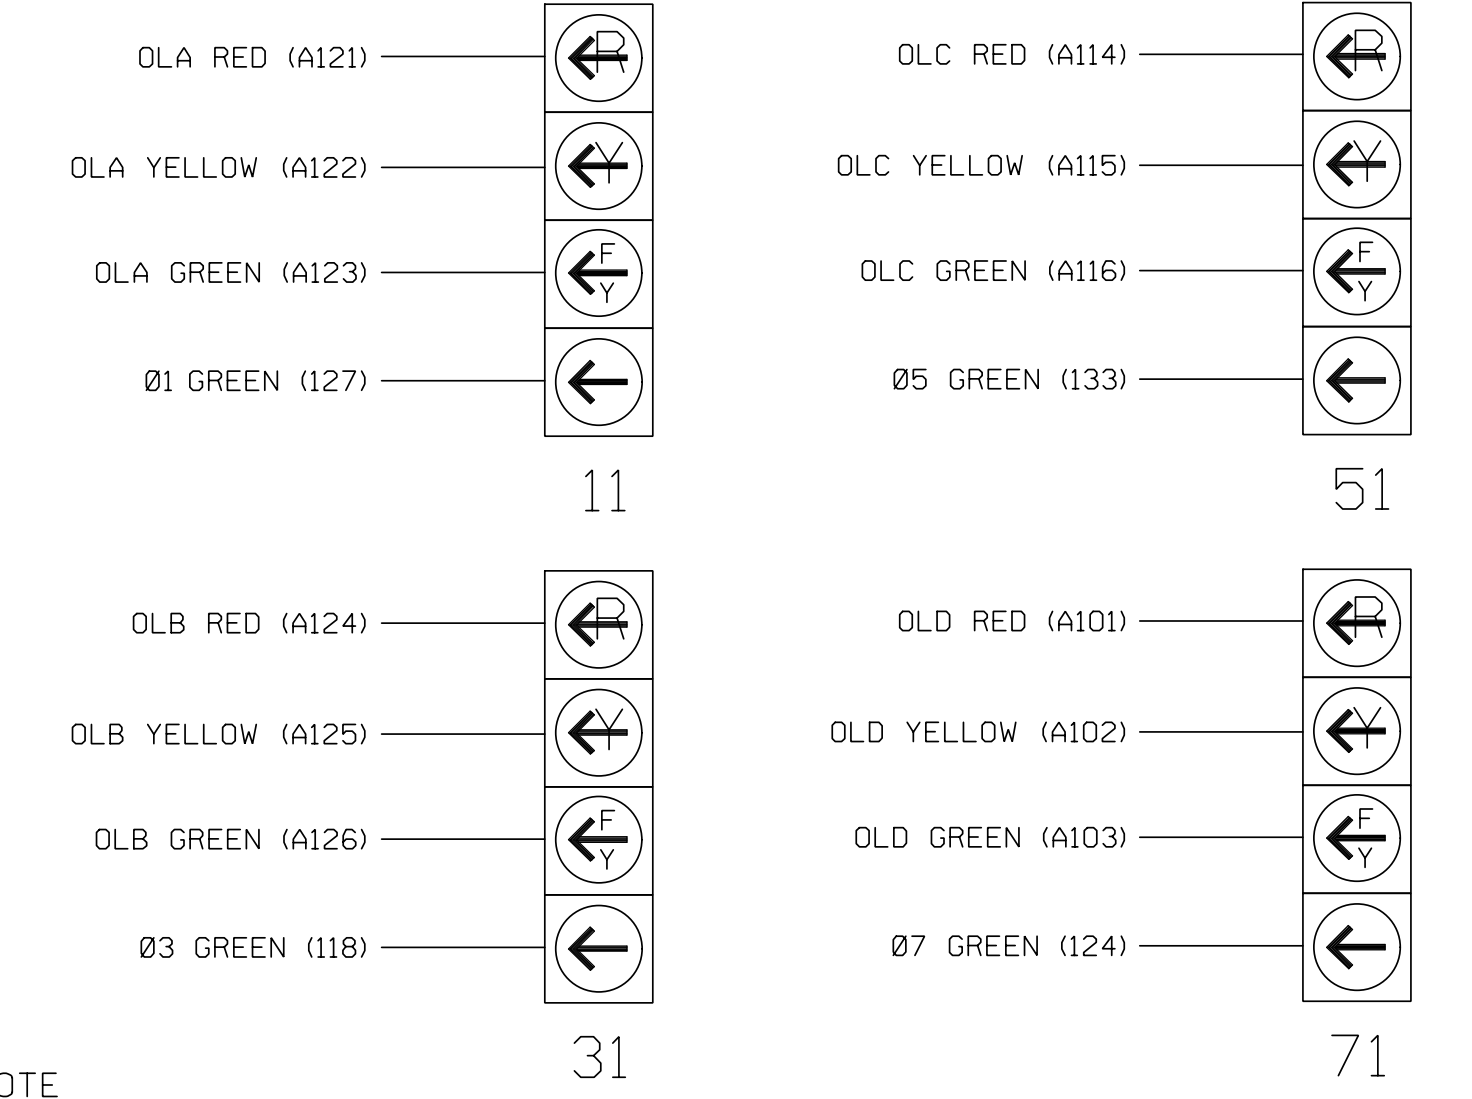

NOTE

The sequence display for signal heads 11, 31, 51, and 71 requires special logic programming. See sheet 2 for programming instructions.

NC Dept of Transportation
 Division of Highways
 Final Drawing Date: 8/23/2022
 Prepared by: [Signature]
 ITS & Signals Unit

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: Ø8-0435
 DESIGNED: May 2022
 SEALED: 8/10/2022
 REVISED: N/A

Electrical Detail - Sheet 1 of 7

ELECTRICAL AND PROGRAMMING DETAILS FOR:	US 15-501 at Charger Boulevard/ Mosaic Drive	
	Division 8 Chatham County	Pittsboro
PLAN DATE: May 2022	REVIEWED BY: KP Baumann	SEAL 044434
PREPARED BY: SP Pennington	REVIEWED BY:	ENGINEER KEVIN P. BAUMANN
REVISIONS	INIT.	DATE
750 N. Greenfield Pkwy, Garner, NC 27529	8/10/2022	DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SIG. INVENTORY NO. 08-0435

LOGICAL I/O PROCESSOR PROGRAMMING DETAIL TO PRODUCE SPECIAL FYA-PPLT SIGNAL SEQUENCE

(program controller as shown below)

- FROM MAIN MENU PRESS '2' (PHASE CONTROL), THEN '1' (PHASE CONTROL FUNCTIONS). SCROLL TO THE BOTTOM OF THE MENU AND ENABLE ACT LOGIC COMMANDS 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, AND 12.
- FROM MAIN MENU PRESS '6' (OUTPUTS), THEN '3' (LOGICAL I/O PROCESSOR).

LOGICAL I/O COMMAND #1 (+/-COMMAND#)
IF ACTIVE PHASE #1 IS ON
AND RED CLEAR ON PHASE #1 IS ON

NOTE: LOGIC FOR PHASE 1 RED CLEAR WHEN TRANSITIONING FROM PHASE 1 TO PHASE 2 (HEAD 11).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #50 ON
SET OUTPUT ASSIGNMENT #51 OFF

PRESS '+'

LOGICAL I/O COMMAND #2 (+/-COMMAND#)
IF ACTIVE PHASE #1 IS ON

NOTE: LOGIC FOR SWITCHING FLASHING YELLOW ARROW "OFF" DURING PHASE 1 (HEAD 11).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #52 OFF

PRESS '+'

LOGICAL I/O COMMAND #3 (+/-COMMAND#)
IF YELLOW ON PHASE #1 IS ON

NOTE: LOGIC FOR YELLOW ARROW CLEARANCE FROM PHASE 1 (HEAD 11).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #51 ON

PRESS '+'

LOGICAL I/O COMMAND #4 (+/-COMMAND#)
IF ACTIVE PHASE #5 IS ON
AND RED CLEAR ON PHASE #5 IS ON

NOTE: LOGIC FOR PHASE 5 RED CLEAR WHEN TRANSITIONING FROM PHASE 5 TO PHASE 6 (HEAD 51).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #42 ON
SET OUTPUT ASSIGNMENT #43 OFF

PRESS '+'

LOGICAL I/O COMMAND #5 (+/-COMMAND#)
IF ACTIVE PHASE #5 IS ON

NOTE: LOGIC FOR SWITCHING FLASHING YELLOW ARROW "OFF" DURING PHASE 5 (HEAD 51).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #44 OFF

PRESS '+'

LOGICAL I/O COMMAND #6 (+/-COMMAND#)
IF YELLOW ON PHASE #5 IS ON

NOTE: LOGIC FOR YELLOW ARROW CLEARANCE FROM PHASE 5 (HEAD 51).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #43 ON

PRESS '+'

LOGICAL I/O COMMAND #7 (+/-COMMAND#)
IF ACTIVE PHASE #3 IS ON
AND RED CLEAR ON PHASE #3 IS ON

NOTE: LOGIC FOR PHASE 3 RED CLEAR WHEN TRANSITIONING FROM PHASE 3 TO PHASE 4 (HEAD 31).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #47 ON
SET OUTPUT ASSIGNMENT #48 OFF

PRESS '+'

LOGICAL I/O COMMAND #8 (+/-COMMAND#)
IF ACTIVE PHASE #3 IS ON

NOTE: LOGIC FOR SWITCHING FLASHING YELLOW ARROW "OFF" DURING PHASE 3 (HEAD 31).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #49 OFF

PRESS '+'

LOGICAL I/O COMMAND #9 (+/-COMMAND#)
IF YELLOW ON PHASE #3 IS ON

NOTE: LOGIC FOR YELLOW ARROW CLEARANCE FROM PHASE 3 (HEAD 31).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #48 ON

PRESS '+'

LOGICAL I/O COMMAND #10 (+/-COMMAND#)
IF ACTIVE PHASE #7 IS ON
AND RED CLEAR ON PHASE #7 IS ON

NOTE: LOGIC FOR PHASE 7 RED CLEAR WHEN TRANSITIONING FROM PHASE 7 TO PHASE 8 (HEAD 71).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #39 ON
SET OUTPUT ASSIGNMENT #40 OFF

PRESS '+'

LOGICAL I/O COMMAND #11 (+/-COMMAND#)
IF ACTIVE PHASE #7 IS ON

NOTE: LOGIC FOR SWITCHING FLASHING YELLOW ARROW "OFF" DURING PHASE 7 (HEAD 71).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #41 OFF

PRESS '+'

LOGICAL I/O COMMAND #12 (+/-COMMAND#)
IF YELLOW ON PHASE #7 IS ON

NOTE: LOGIC FOR YELLOW ARROW CLEARANCE FROM PHASE 7 (HEAD 71).

SCROLL DOWN

THEN:
SET OUTPUT ASSIGNMENT #40 ON

PRESS '+'

LOGIC I/O PROCESSOR PROGRAMMING COMPLETE

OVERLAP PROGRAMMING DETAIL FOR DEFAULT PHASING

(program controller as shown below)

FROM MAIN MENU PRESS '8' (OVERLAPS), THEN '1' (VEHICLE OVERLAP SETTINGS).

PAGE 1: VEHICLE OVERLAP 'A' SETTINGS
PHASE: 12345678910111213141516
VEH OVL PARENTS: XX
VEH OVL NOT VEH:
VEH OVL NOT PED:
VEH OVL GRN EXT:
STARTUP COLOR: - RED - YELLOW - GREEN
FLASH COLORS: - RED - YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC)...0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0.0

← NOTICE GREEN FLASH

PRESS '+'

PAGE 1: VEHICLE OVERLAP 'B' SETTINGS
PHASE: 12345678910111213141516
VEH OVL PARENTS: XX
VEH OVL NOT VEH:
VEH OVL NOT PED:
VEH OVL GRN EXT:
STARTUP COLOR: - RED - YELLOW - GREEN
FLASH COLORS: - RED - YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...N
GREEN EXTENSION (0-255 SEC)...0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0.0

← NOTICE GREEN FLASH

PRESS '+'

PAGE 1: VEHICLE OVERLAP 'C' SETTINGS
PHASE: 12345678910111213141516
VEH OVL PARENTS: XX
VEH OVL NOT VEH:
VEH OVL NOT PED:
VEH OVL GRN EXT:
STARTUP COLOR: - RED - YELLOW - GREEN
FLASH COLORS: - RED - YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC)...0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0.0

← NOTICE GREEN FLASH

PRESS '+'

PAGE 1: VEHICLE OVERLAP 'D' SETTINGS
PHASE: 12345678910111213141516
VEH OVL PARENTS: XX
VEH OVL NOT VEH:
VEH OVL NOT PED:
VEH OVL GRN EXT:
STARTUP COLOR: - RED - YELLOW - GREEN
FLASH COLORS: - RED - YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...N
GREEN EXTENSION (0-255 SEC)...0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0.0

← NOTICE GREEN FLASH

PRESS '+'

OVERLAP PROGRAMMING COMPLETE

OVERLAP PROGRAMMING DETAIL FOR ALTERNATE PHASING

(program controller as shown below)

FROM MAIN MENU PRESS '8' (OVERLAPS), THEN '1' (VEHICLE OVERLAP SETTINGS). PRESS 'NEXT' TO ADVANCE TO PAGE 2.

NOTICE PAGE 2 → PAGE 2: VEHICLE OVERLAP 'A' SETTINGS
PHASE: 12345678910111213141516
VEH OVL PARENTS: X
VEH OVL NOT VEH:
VEH OVL NOT PED:
VEH OVL GRN EXT:
STARTUP COLOR: - RED - YELLOW - GREEN
FLASH COLORS: - RED - YELLOW - GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC)...0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0.0

← NOTICE PAGE 2

PRESS '+'

NOTICE PAGE 2 → PAGE 2: VEHICLE OVERLAP 'B' SETTINGS
PHASE: 12345678910111213141516
VEH OVL PARENTS: X
VEH OVL NOT VEH:
VEH OVL NOT PED:
VEH OVL GRN EXT:
STARTUP COLOR: - RED - YELLOW - GREEN
FLASH COLORS: - RED - YELLOW - GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...N
GREEN EXTENSION (0-255 SEC)...0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0.0

← NOTICE PAGE 2

PRESS '+'

NOTICE PAGE 2 → PAGE 2: VEHICLE OVERLAP 'C' SETTINGS
PHASE: 12345678910111213141516
VEH OVL PARENTS: X
VEH OVL NOT VEH:
VEH OVL NOT PED:
VEH OVL GRN EXT:
STARTUP COLOR: - RED - YELLOW - GREEN
FLASH COLORS: - RED - YELLOW - GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC)...0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0.0

← NOTICE PAGE 2

PRESS '+'

NOTICE PAGE 2 → PAGE 2: VEHICLE OVERLAP 'D' SETTINGS
PHASE: 12345678910111213141516
VEH OVL PARENTS: X
VEH OVL NOT VEH:
VEH OVL NOT PED:
VEH OVL GRN EXT:
STARTUP COLOR: - RED - YELLOW - GREEN
FLASH COLORS: - RED - YELLOW - GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...N
GREEN EXTENSION (0-255 SEC)...0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0.0

← NOTICE PAGE 2

PRESS '+'

OVERLAP PROGRAMMING COMPLETE

OUTPUT REFERENCE SCHEDULE
USE TO INTERPRET LOGIC PROCESSOR

OUTPUT 39	=	Overlap D Red
OUTPUT 40	=	Overlap D Yellow
OUTPUT 41	=	Overlap D Green
OUTPUT 42	=	Overlap C Red
OUTPUT 43	=	Overlap C Yellow
OUTPUT 44	=	Overlap C Green
OUTPUT 47	=	Overlap B Red
OUTPUT 48	=	Overlap B Yellow
OUTPUT 49	=	Overlap B Green
OUTPUT 50	=	Overlap A Red
OUTPUT 51	=	Overlap A Yellow
OUTPUT 52	=	Overlap A Green

NC Dept of Transportation
Division of Highways
Final Drawing Date: 8/23/2022
Prepared by: *Chang Park*
Checked by: *[Signature]*
ITS & Signals Unit

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 08-0435
DESIGNED: May 2022
SEALED: 8/10/2022
REVISED: N/A

Electrical Detail - Sheet 2 of 7

ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared For: PLANS PREPARED IN THE OFFICE OF: Kimley»Horn NC License #F-0102 421 Fayetteville Street, Suite 600 Raleigh, NC 27601 (919) 671-2000	US 15-501 at Charger Boulevard/ Mosaic Drive Division 8 Chatham County Pittsboro		DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED SEAL 044434 KEVIN P. BAUMANN ENGINEER 8/10/2022 DATE
	PLAN DATE: May 2022 PREPARED BY: SP Pennington REVISIONS:	REVIEWED BY: KP Baumann REVIEWED BY:	

SIG. INVENTORY NO. 08-0435


8/9/2022 6:15:39 PM susan.pennington
 ***:timley-horn.com:SE:RAL:TRALL:TP:DK-SIGNALS:0812325040:Chatham - Northwoods SignalPhase 3:6:4 - Signal Design:0810435-2022a2.dgn

INPUT PAGE 2 ASSIGNMENT PROGRAMMING DETAIL FOR ALTERNATE PHASING - LOOP 1A

(program controller as shown below)

- NOTES: 1. THIS PROGRAMMING APPLIES FOR INPUT PAGE 2 ONLY. INPUT PAGE 1 WILL USE STANDARD DEFAULT SETTINGS. THIS PROGRAMMING IS NECESSARY FOR PROPER DETECTOR OPERATION DURING ALTERNATE PHASING OPERATION.
2. THE FIRST TASK THIS PROGRAMMING ACCOMPLISHES IS THE DISABLING OF INPUT #10 (DETECTOR 26) SO THAT A VEHICLE CALL WILL NOT BE PLACED TO PHASE 6 DURING ALTERNATE PHASING OPERATION. THE SECOND TASK THIS PROGRAMMING ACCOMPLISHES IS THAT IT REASSIGNS DETECTOR 51 TO INPUT #18 SO THAT THE DELAY ON LOOP 1A CAN BE REDUCED FROM 15 SECONDS TO 0 SECONDS.


FROM MAIN MENU PRESS '5' (INPUTS), THEN PRESS 'NEXT' TO GET TO INPUT PAGE '2'. PRESS THE '+' KEY UNTIL INPUT 10 IS REACHED.

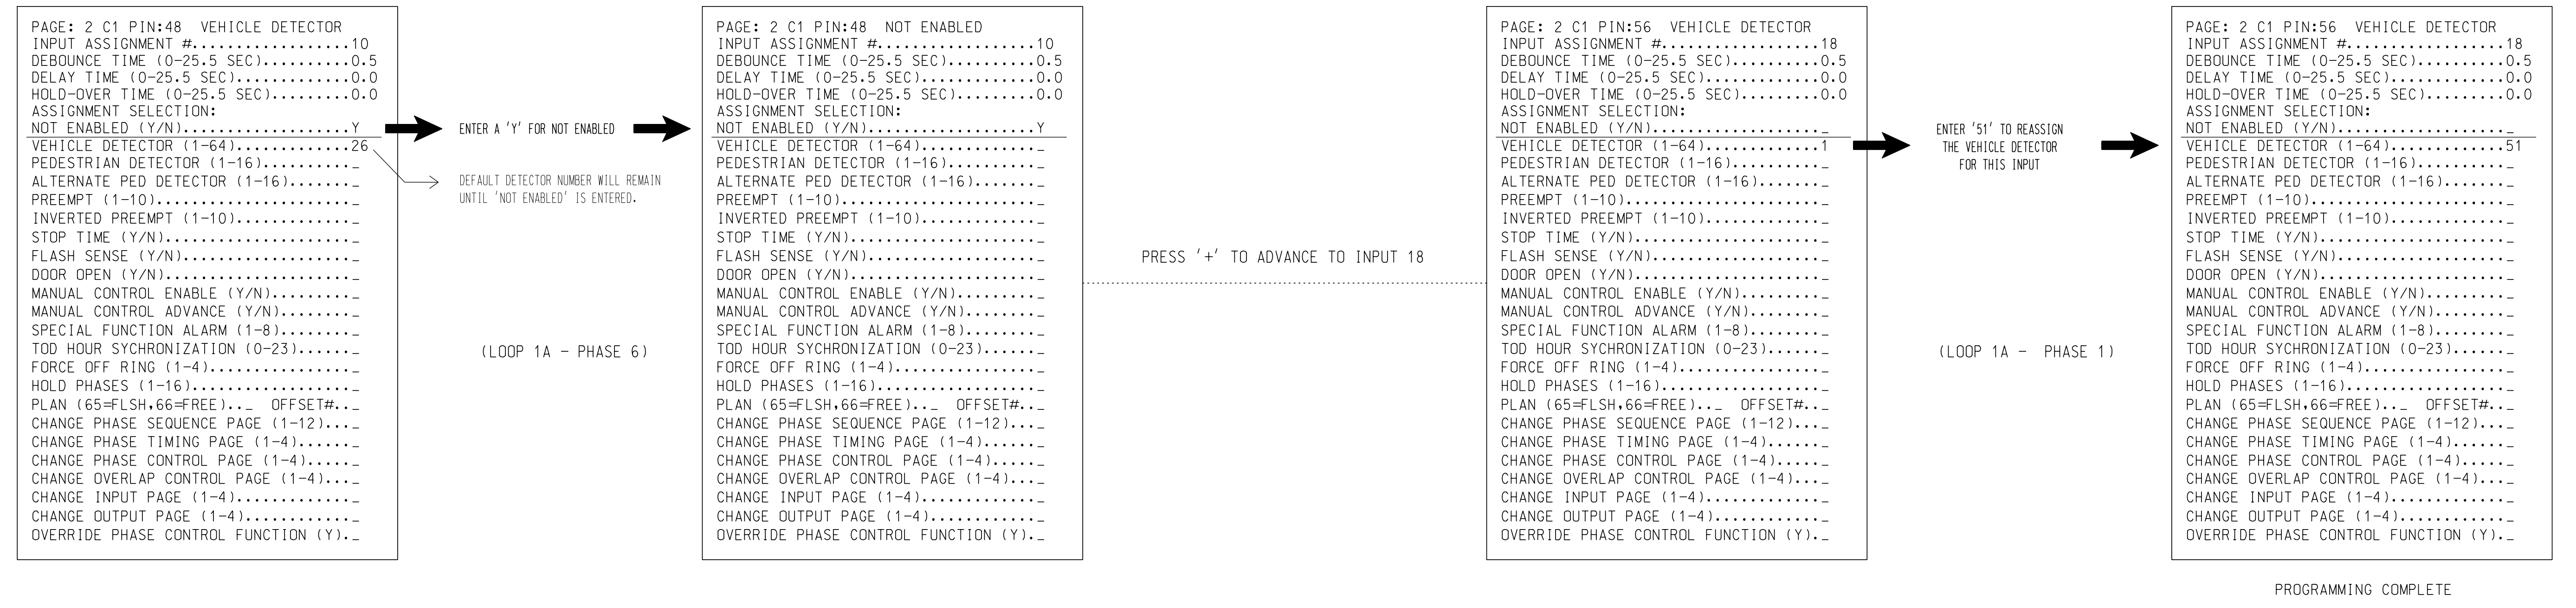

SPECIAL DETECTOR PROGRAMMING DETAIL - LOOP 1A (ALT.)

(program controller as shown below)

FROM MAIN MENU PRESS '7' (DETECTORS), THEN PRESS '1' FOR VEHICLE DETECTORS. PRESS THE '-' KEY TO GET TO VEHICLE DETECTOR #51.

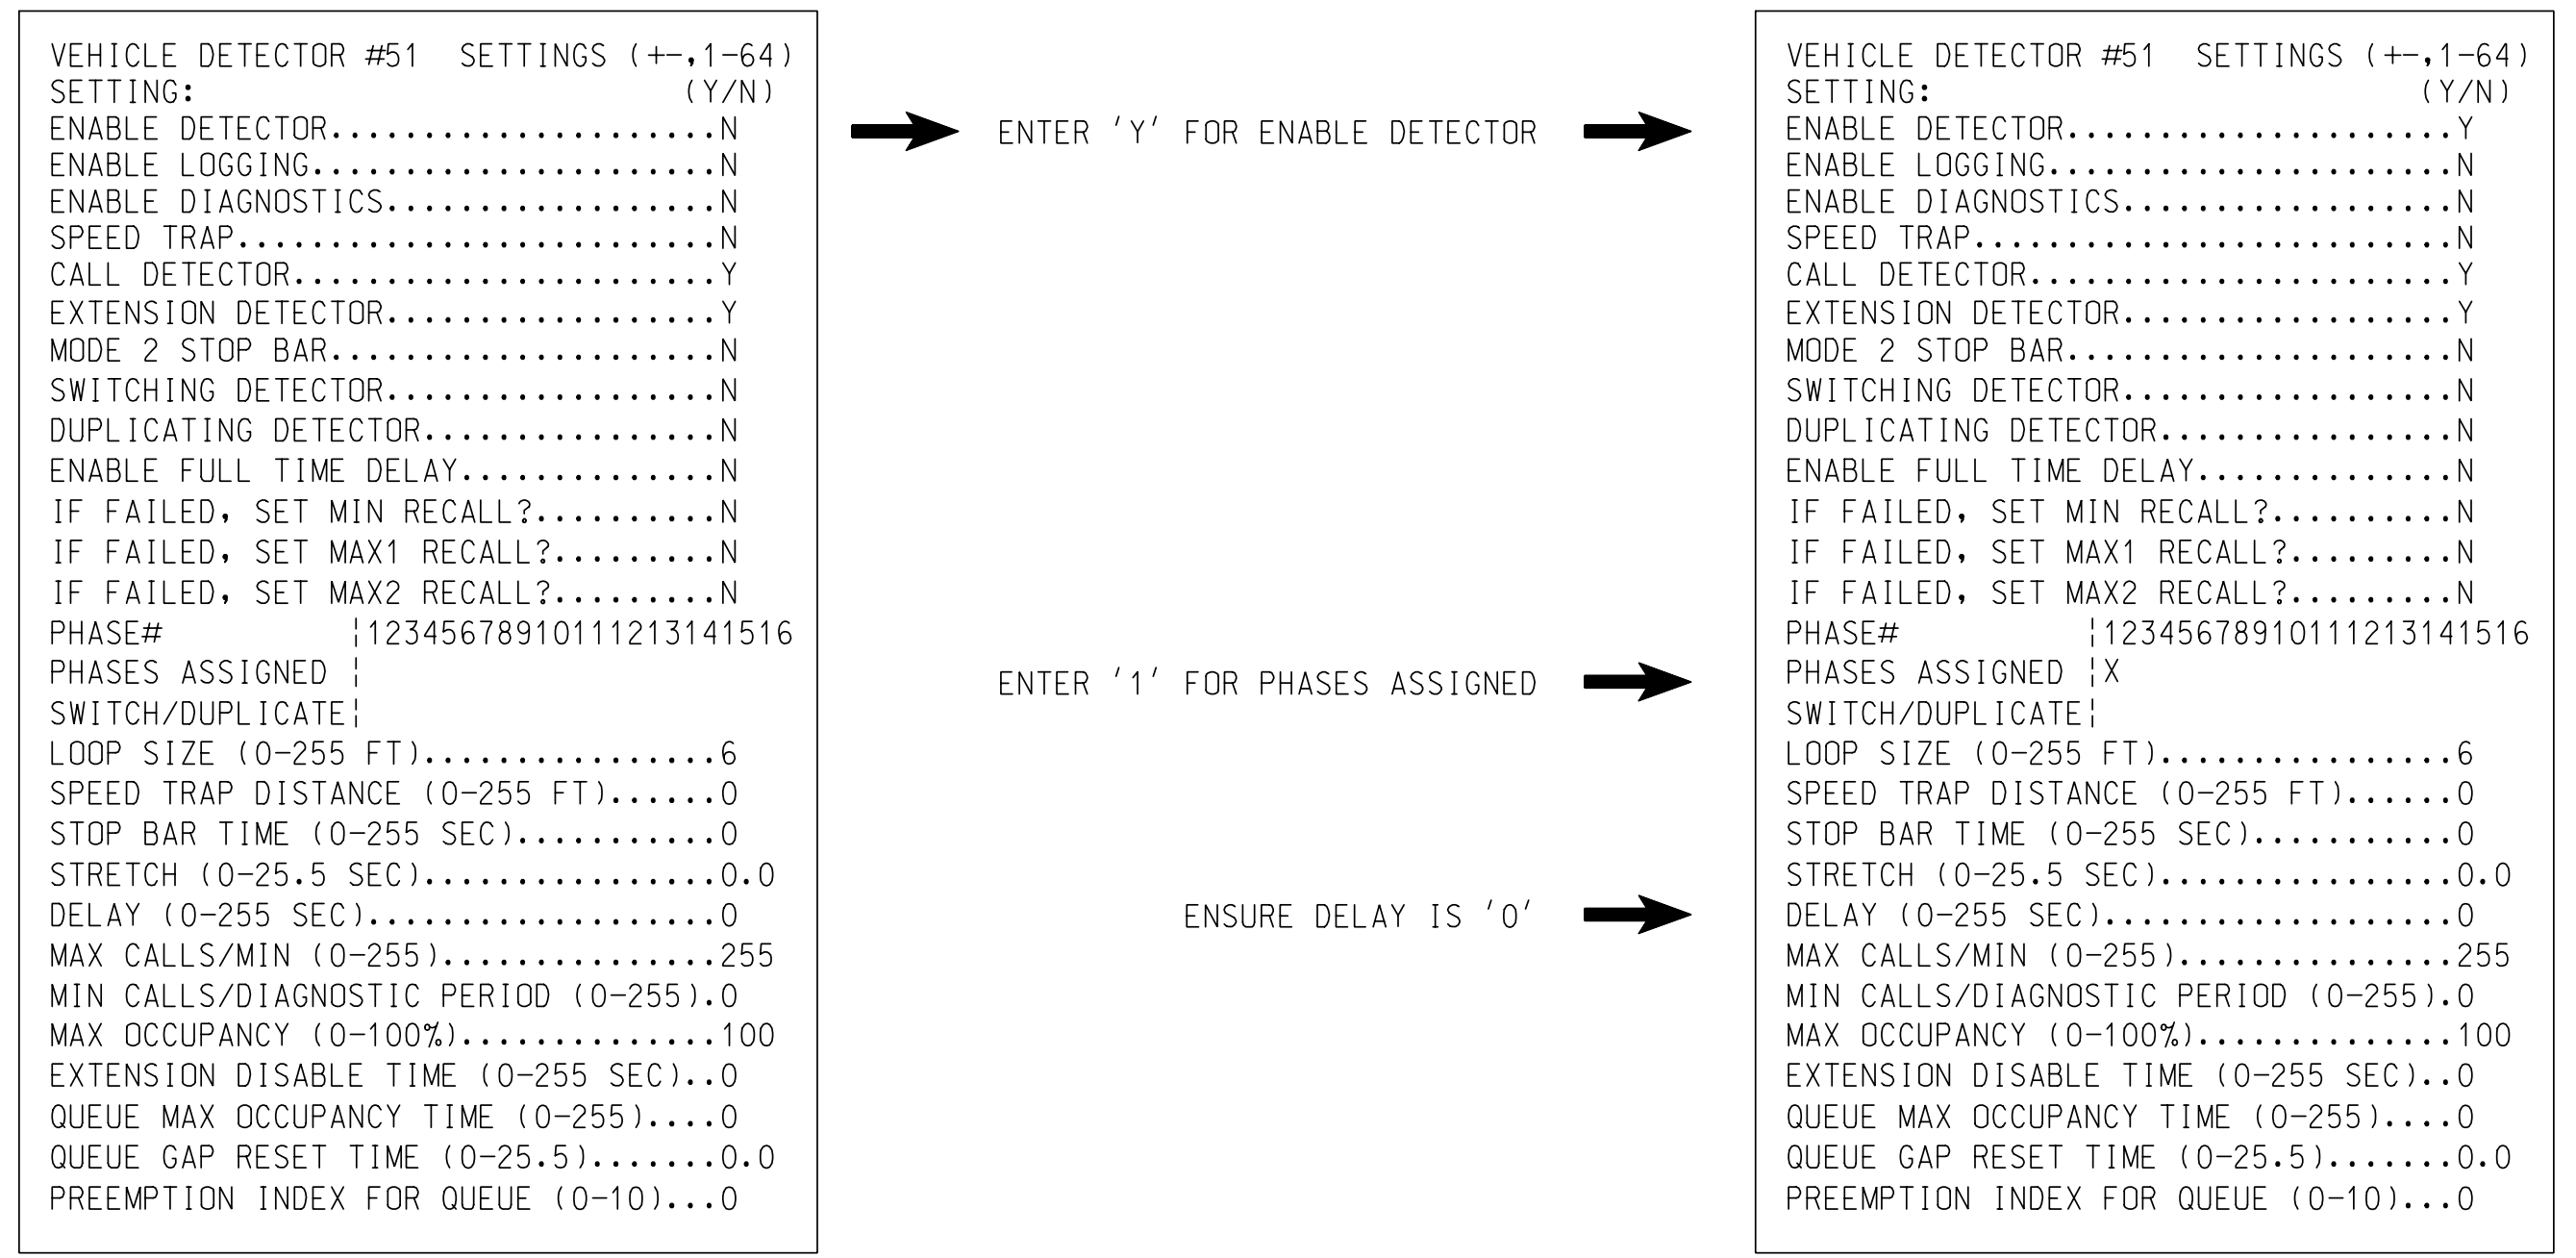

NOTE: DETECTOR IS PROGRAMMED PER THE INPUT FILE CONNECTION AND PROGRAMMING CHART SHOWN ON SHEET 1.

NC Dept of Transportation
Division of Highways

Final Drawing Date: 8/23/2022

Designed by: Clayton Buck

ITS & Signals Unit

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 08-0435

DESIGNED: May 2022

SEALED: 8/10/2022

REVISED: N/A

Electrical Detail - Sheet 3 of 7

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

STATE OF NORTH CAROLINA PROFESSIONAL ENGINEER KEVIN P. BAUMANN

SEAL 044434

8/10/2022

SIGNATURE DATE

SIG. INVENTORY NO. 08-0435

PLANS PREPARED IN THE OFFICE OF:
Kimley»Horn
NC License #F-0102
421 Fayetteville Street, Suite 600
Raleigh, NC 27601
(919) 671-2000

Prepared For:
City of Chatham
Department of Transportation
Signal Management Section

750 N. Greenfield Pkwy, Garner, NC 27529

US 15-501 at Charger Boulevard/Mosaic Drive

Division 8 Chatham County Pittsboro

PLAN DATE: May 2022 REVIEWED BY: KP Baumann

PREPARED BY: SP Pennington REVIEWED BY:

REVISIONS	INIT.	DATE

8/9/2022 6:15:40 PM susan.pennington ***k:\in\ey-horn.com\SEC-RAL\RAL-TP\DK-SIGNAL\SMD\12325040 Chatham - Northwoods Signal Phase 3.654 - Signal Des\gm080435-2022a3.dgn

INPUT PAGE 2 ASSIGNMENT PROGRAMMING DETAIL FOR ALTERNATE PHASING - LOOP 3A

(program controller as shown below)

- NOTES: 1. THIS PROGRAMMING APPLIES FOR INPUT PAGE 2 ONLY. INPUT PAGE 1 WILL USE STANDARD DEFAULT SETTINGS. THIS PROGRAMMING IS NECESSARY FOR PROPER DETECTOR OPERATION DURING ALTERNATE PHASING OPERATION.
2. THE FIRST TASK THIS PROGRAMMING ACCOMPLISHES IS THE DISABLING OF INPUT #12 (DETECTOR 28) SO THAT A VEHICLE CALL WILL NOT BE PLACED TO PHASE 8 DURING ALTERNATE PHASING OPERATION. THE SECOND TASK THIS PROGRAMMING ACCOMPLISHES IS THAT IT REASSIGNS DETECTOR 53 TO INPUT #20 SO THAT THE DELAY ON LOOP 3A CAN BE REDUCED FROM 15 SECONDS TO 0 SECONDS.

FROM MAIN MENU PRESS '5' (INPUTS), THEN PRESS 'NEXT' TO GET TO INPUT PAGE '2'. PRESS THE '+' KEY UNTIL INPUT 12 IS REACHED.

```

PAGE: 2 C1 PIN:50 VEHICLE DETECTOR
INPUT ASSIGNMENT #.....12
DEBOUNCE TIME (0-25.5 SEC).....0.5
DELAY TIME (0-25.5 SEC).....0.0
HOLD-OVER TIME (0-25.5 SEC).....0.0
ASSIGNMENT SELECTION:
NOT ENABLED (Y/N).....Y
VEHICLE DETECTOR (1-64).....28
PEDESTRIAN DETECTOR (1-16).....
ALTERNATE PED DETECTOR (1-16).....
PREEMPT (1-10).....
INVERTED PREEMPT (1-10).....
STOP TIME (Y/N).....
FLASH SENSE (Y/N).....
DOOR OPEN (Y/N).....
MANUAL CONTROL ENABLE (Y/N).....
MANUAL CONTROL ADVANCE (Y/N).....
SPECIAL FUNCTION ALARM (1-8).....
TOD HOUR SYNCHRONIZATION (0-23).....
FORCE OFF RING (1-4).....
HOLD PHASES (1-16).....
PLAN (65=FLSH,66=FREE)..._ OFFSET#...
CHANGE PHASE SEQUENCE PAGE (1-12)...
CHANGE PHASE TIMING PAGE (1-4)...
CHANGE PHASE CONTROL PAGE (1-4)...
CHANGE OVERLAP CONTROL PAGE (1-4)...
CHANGE INPUT PAGE (1-4)...
CHANGE OUTPUT PAGE (1-4)...
OVERRIDE PHASE CONTROL FUNCTION (Y)...

```

ENTER A 'Y' FOR NOT ENABLED
DEFAULT DETECTOR NUMBER WILL REMAIN UNTIL 'NOT ENABLED' IS ENTERED.

(LOOP 3A - PHASE 8)

```

PAGE: 2 C1 PIN:50 NOT ENABLED
INPUT ASSIGNMENT #.....12
DEBOUNCE TIME (0-25.5 SEC).....0.5
DELAY TIME (0-25.5 SEC).....0.0
HOLD-OVER TIME (0-25.5 SEC).....0.0
ASSIGNMENT SELECTION:
NOT ENABLED (Y/N).....Y
VEHICLE DETECTOR (1-64).....
PEDESTRIAN DETECTOR (1-16).....
ALTERNATE PED DETECTOR (1-16).....
PREEMPT (1-10).....
INVERTED PREEMPT (1-10).....
STOP TIME (Y/N).....
FLASH SENSE (Y/N).....
DOOR OPEN (Y/N).....
MANUAL CONTROL ENABLE (Y/N).....
MANUAL CONTROL ADVANCE (Y/N).....
SPECIAL FUNCTION ALARM (1-8).....
TOD HOUR SYNCHRONIZATION (0-23).....
FORCE OFF RING (1-4).....
HOLD PHASES (1-16).....
PLAN (65=FLSH,66=FREE)..._ OFFSET#...
CHANGE PHASE SEQUENCE PAGE (1-12)...
CHANGE PHASE TIMING PAGE (1-4)...
CHANGE PHASE CONTROL PAGE (1-4)...
CHANGE OVERLAP CONTROL PAGE (1-4)...
CHANGE INPUT PAGE (1-4)...
CHANGE OUTPUT PAGE (1-4)...
OVERRIDE PHASE CONTROL FUNCTION (Y)...

```

PRESS '+' TO ADVANCE TO INPUT 20

```

PAGE: 2 C1 PIN:58 VEHICLE DETECTOR
INPUT ASSIGNMENT #.....20
DEBOUNCE TIME (0-25.5 SEC).....0.5
DELAY TIME (0-25.5 SEC).....0.0
HOLD-OVER TIME (0-25.5 SEC).....0.0
ASSIGNMENT SELECTION:
NOT ENABLED (Y/N).....
VEHICLE DETECTOR (1-64).....3
PEDESTRIAN DETECTOR (1-16).....
ALTERNATE PED DETECTOR (1-16).....
PREEMPT (1-10).....
INVERTED PREEMPT (1-10).....
STOP TIME (Y/N).....
FLASH SENSE (Y/N).....
DOOR OPEN (Y/N).....
MANUAL CONTROL ENABLE (Y/N).....
MANUAL CONTROL ADVANCE (Y/N).....
SPECIAL FUNCTION ALARM (1-8).....
TOD HOUR SYNCHRONIZATION (0-23).....
FORCE OFF RING (1-4).....
HOLD PHASES (1-16).....
PLAN (65=FLSH,66=FREE)..._ OFFSET#...
CHANGE PHASE SEQUENCE PAGE (1-12)...
CHANGE PHASE TIMING PAGE (1-4)...
CHANGE PHASE CONTROL PAGE (1-4)...
CHANGE OVERLAP CONTROL PAGE (1-4)...
CHANGE INPUT PAGE (1-4)...
CHANGE OUTPUT PAGE (1-4)...
OVERRIDE PHASE CONTROL FUNCTION (Y)...

```

ENTER '53' TO REASSIGN THE VEHICLE DETECTOR FOR THIS INPUT

(LOOP 3A - PHASE 3)

```

PAGE: 2 C1 PIN:58 VEHICLE DETECTOR
INPUT ASSIGNMENT #.....20
DEBOUNCE TIME (0-25.5 SEC).....0.5
DELAY TIME (0-25.5 SEC).....0.0
HOLD-OVER TIME (0-25.5 SEC).....0.0
ASSIGNMENT SELECTION:
NOT ENABLED (Y/N).....
VEHICLE DETECTOR (1-64).....53
PEDESTRIAN DETECTOR (1-16).....
ALTERNATE PED DETECTOR (1-16).....
PREEMPT (1-10).....
INVERTED PREEMPT (1-10).....
STOP TIME (Y/N).....
FLASH SENSE (Y/N).....
DOOR OPEN (Y/N).....
MANUAL CONTROL ENABLE (Y/N).....
MANUAL CONTROL ADVANCE (Y/N).....
SPECIAL FUNCTION ALARM (1-8).....
TOD HOUR SYNCHRONIZATION (0-23).....
FORCE OFF RING (1-4).....
HOLD PHASES (1-16).....
PLAN (65=FLSH,66=FREE)..._ OFFSET#...
CHANGE PHASE SEQUENCE PAGE (1-12)...
CHANGE PHASE TIMING PAGE (1-4)...
CHANGE PHASE CONTROL PAGE (1-4)...
CHANGE OVERLAP CONTROL PAGE (1-4)...
CHANGE INPUT PAGE (1-4)...
CHANGE OUTPUT PAGE (1-4)...
OVERRIDE PHASE CONTROL FUNCTION (Y)...

```

PROGRAMMING COMPLETE

SPECIAL DETECTOR PROGRAMMING DETAIL - LOOP 3A (ALT.)

(program controller as shown below)

FROM MAIN MENU PRESS '7' (DETECTORS), THEN PRESS '1' FOR VEHICLE DETECTORS. PRESS THE '-' KEY TO GET TO VEHICLE DETECTOR #53.

```

VEHICLE DETECTOR #53 SETTINGS (+,-,1-64)
SETTING: (Y/N)
ENABLE DETECTOR.....N
ENABLE LOGGING.....N
ENABLE DIAGNOSTICS.....N
SPEED TRAP.....N
CALL DETECTOR.....Y
EXTENSION DETECTOR.....Y
MODE 2 STOP BAR.....N
SWITCHING DETECTOR.....N
DUPLICATING DETECTOR.....N
ENABLE FULL TIME DELAY.....N
IF FAILED, SET MIN RECALL?.....N
IF FAILED, SET MAX1 RECALL?.....N
IF FAILED, SET MAX2 RECALL?.....N
PHASE#      |12345678910111213141516
PHASES ASSIGNED |
SWITCH/DUPLICATE|
LOOP SIZE (0-255 FT).....6
SPEED TRAP DISTANCE (0-255 FT).....0
STOP BAR TIME (0-255 SEC).....0
STRETCH (0-25.5 SEC).....0.0
DELAY (0-255 SEC).....0.0
MAX CALLS/MIN (0-255).....255
MIN CALLS/DIAGNOSTIC PERIOD (0-255).....0
MAX OCCUPANCY (0-100%).....100
EXTENSION DISABLE TIME (0-255 SEC).....0
QUEUE MAX OCCUPANCY TIME (0-255).....0
QUEUE GAP RESET TIME (0-25.5).....0.0
PREEMPTION INDEX FOR QUEUE (0-10).....0

```

ENTER 'Y' FOR ENABLE DETECTOR

ENTER '3' FOR PHASES ASSIGNED

ENSURE DELAY IS '0'


```

VEHICLE DETECTOR #53 SETTINGS (+,-,1-64)
SETTING: (Y/N)
ENABLE DETECTOR.....Y
ENABLE LOGGING.....N
ENABLE DIAGNOSTICS.....N
SPEED TRAP.....N
CALL DETECTOR.....Y
EXTENSION DETECTOR.....Y
MODE 2 STOP BAR.....N
SWITCHING DETECTOR.....N
DUPLICATING DETECTOR.....N
ENABLE FULL TIME DELAY.....N
IF FAILED, SET MIN RECALL?.....N
IF FAILED, SET MAX1 RECALL?.....N
IF FAILED, SET MAX2 RECALL?.....N
PHASE#      |12345678910111213141516
PHASES ASSIGNED | X
SWITCH/DUPLICATE|
LOOP SIZE (0-255 FT).....6
SPEED TRAP DISTANCE (0-255 FT).....0
STOP BAR TIME (0-255 SEC).....0
STRETCH (0-25.5 SEC).....0.0
DELAY (0-255 SEC).....0.0
MAX CALLS/MIN (0-255).....255
MIN CALLS/DIAGNOSTIC PERIOD (0-255).....0
MAX OCCUPANCY (0-100%).....100
EXTENSION DISABLE TIME (0-255 SEC).....0
QUEUE MAX OCCUPANCY TIME (0-255).....0
QUEUE GAP RESET TIME (0-25.5).....0.0
PREEMPTION INDEX FOR QUEUE (0-10).....0

```


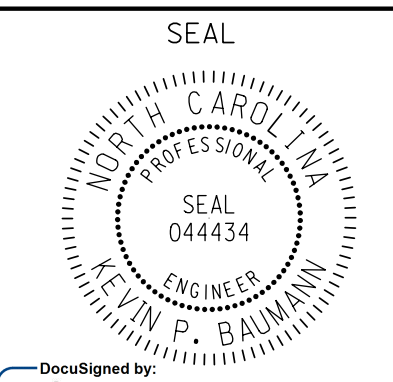
DETECTOR PROGRAMMING COMPLETE

NOTE: DETECTOR IS PROGRAMMED PER THE INPUT FILE CONNECTION AND PROGRAMMING CHART SHOWN ON SHEET 1.

NC Dept of Transportation
Division of Highways
Final Drawing Date: 8/23/2022
Seal: 
ITS & Signals Unit

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 08-0435
DESIGNED: May 2022
SEALED: 8/10/2022
REVISED: N/A

Electrical Detail - Sheet 4 of 7

 Prepared For: City of Chatham Department of Transportation 750 N. Greenfield Pkwy, Garner, NC 27529	US 15-501 at Charger Boulevard/ Mosaic Drive		DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED  SEAL 044434 KEVIN P. BAUMANN ENGINEER
	Division 8 Chatham County Pittsboro PLAN DATE: May 2022 REVIEWED BY: KP Baumann PREPARED BY: SP Pennington REVIEWED BY:	REVISIONS INIT. DATE	

PLANS PREPARED IN THE OFFICE OF:
Kimley-Horn
NC License #F-0102
421 Fayetteville Street, Suite 600
Raleigh, NC 27601
(919) 677-2000


8/9/2022 6:15:42 PM susan.pennington mki:imley-horn.com:SE...RAL:WRAL...JF:DK...S:IGNAL:SWO12325040 Chatham - Northwoods Signal Phase 3A54 - Signal Des:gmw080435-2022e4-dgn

INPUT PAGE 2 ASSIGNMENT PROGRAMMING DETAIL FOR ALTERNATE PHASING - LOOP 5A

(program controller as shown below)

- NOTES: 1. THIS PROGRAMMING APPLIES FOR INPUT PAGE 2 ONLY. INPUT PAGE 1 WILL USE STANDARD DEFAULT SETTINGS. THIS PROGRAMMING IS NECESSARY FOR PROPER DETECTOR OPERATION DURING ALTERNATE PHASING OPERATION.
2. THE FIRST TASK THIS PROGRAMMING ACCOMPLISHES IS THE DISABLING OF INPUT #9 (DETECTOR 22) SO THAT A VEHICLE CALL WILL NOT BE PLACED TO PHASE 2 DURING ALTERNATE PHASING OPERATION. THE SECOND TASK THIS PROGRAMMING ACCOMPLISHES IS THAT IT REASSIGNS DETECTOR 55 TO INPUT #17 SO THAT THE DELAY ON LOOP 5A CAN BE REDUCED FROM 15 SECONDS TO 0 SECONDS.


FROM MAIN MENU PRESS '5' (INPUTS), THEN PRESS 'NEXT' TO GET TO INPUT PAGE '2'. PRESS THE '+' KEY UNTIL INPUT 9 IS REACHED.

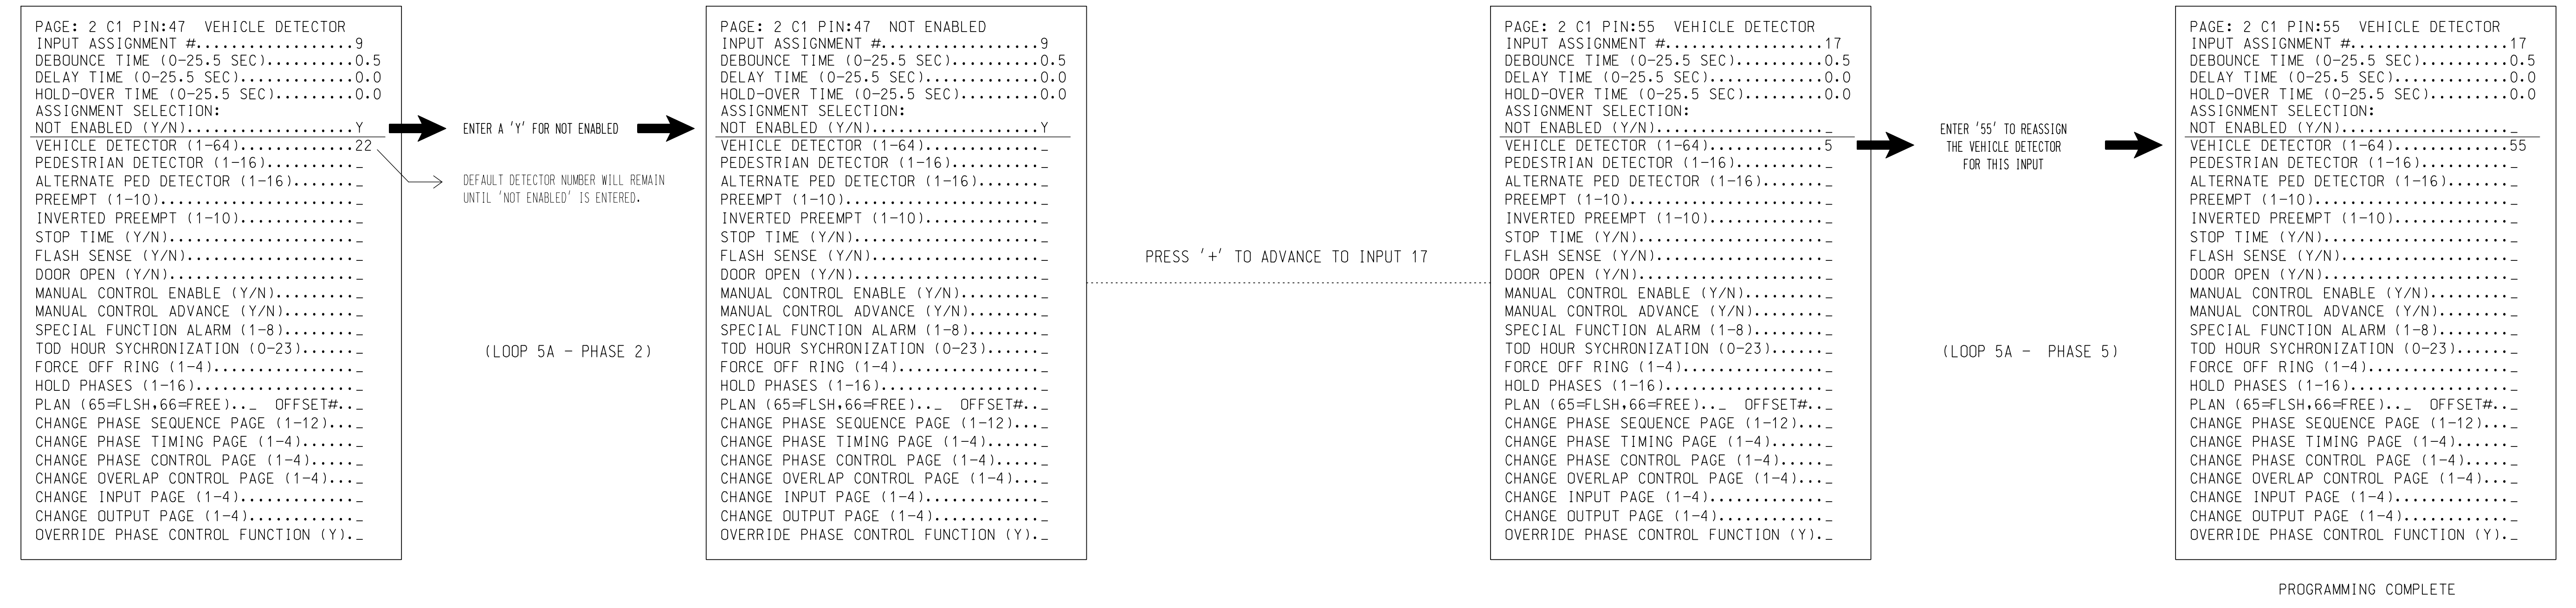

SPECIAL DETECTOR PROGRAMMING DETAIL - LOOP 5A (ALT.)

(program controller as shown below)

FROM MAIN MENU PRESS '7' (DETECTORS), THEN PRESS '1' FOR VEHICLE DETECTORS. PRESS THE '-' KEY TO GET TO VEHICLE DETECTOR #55.

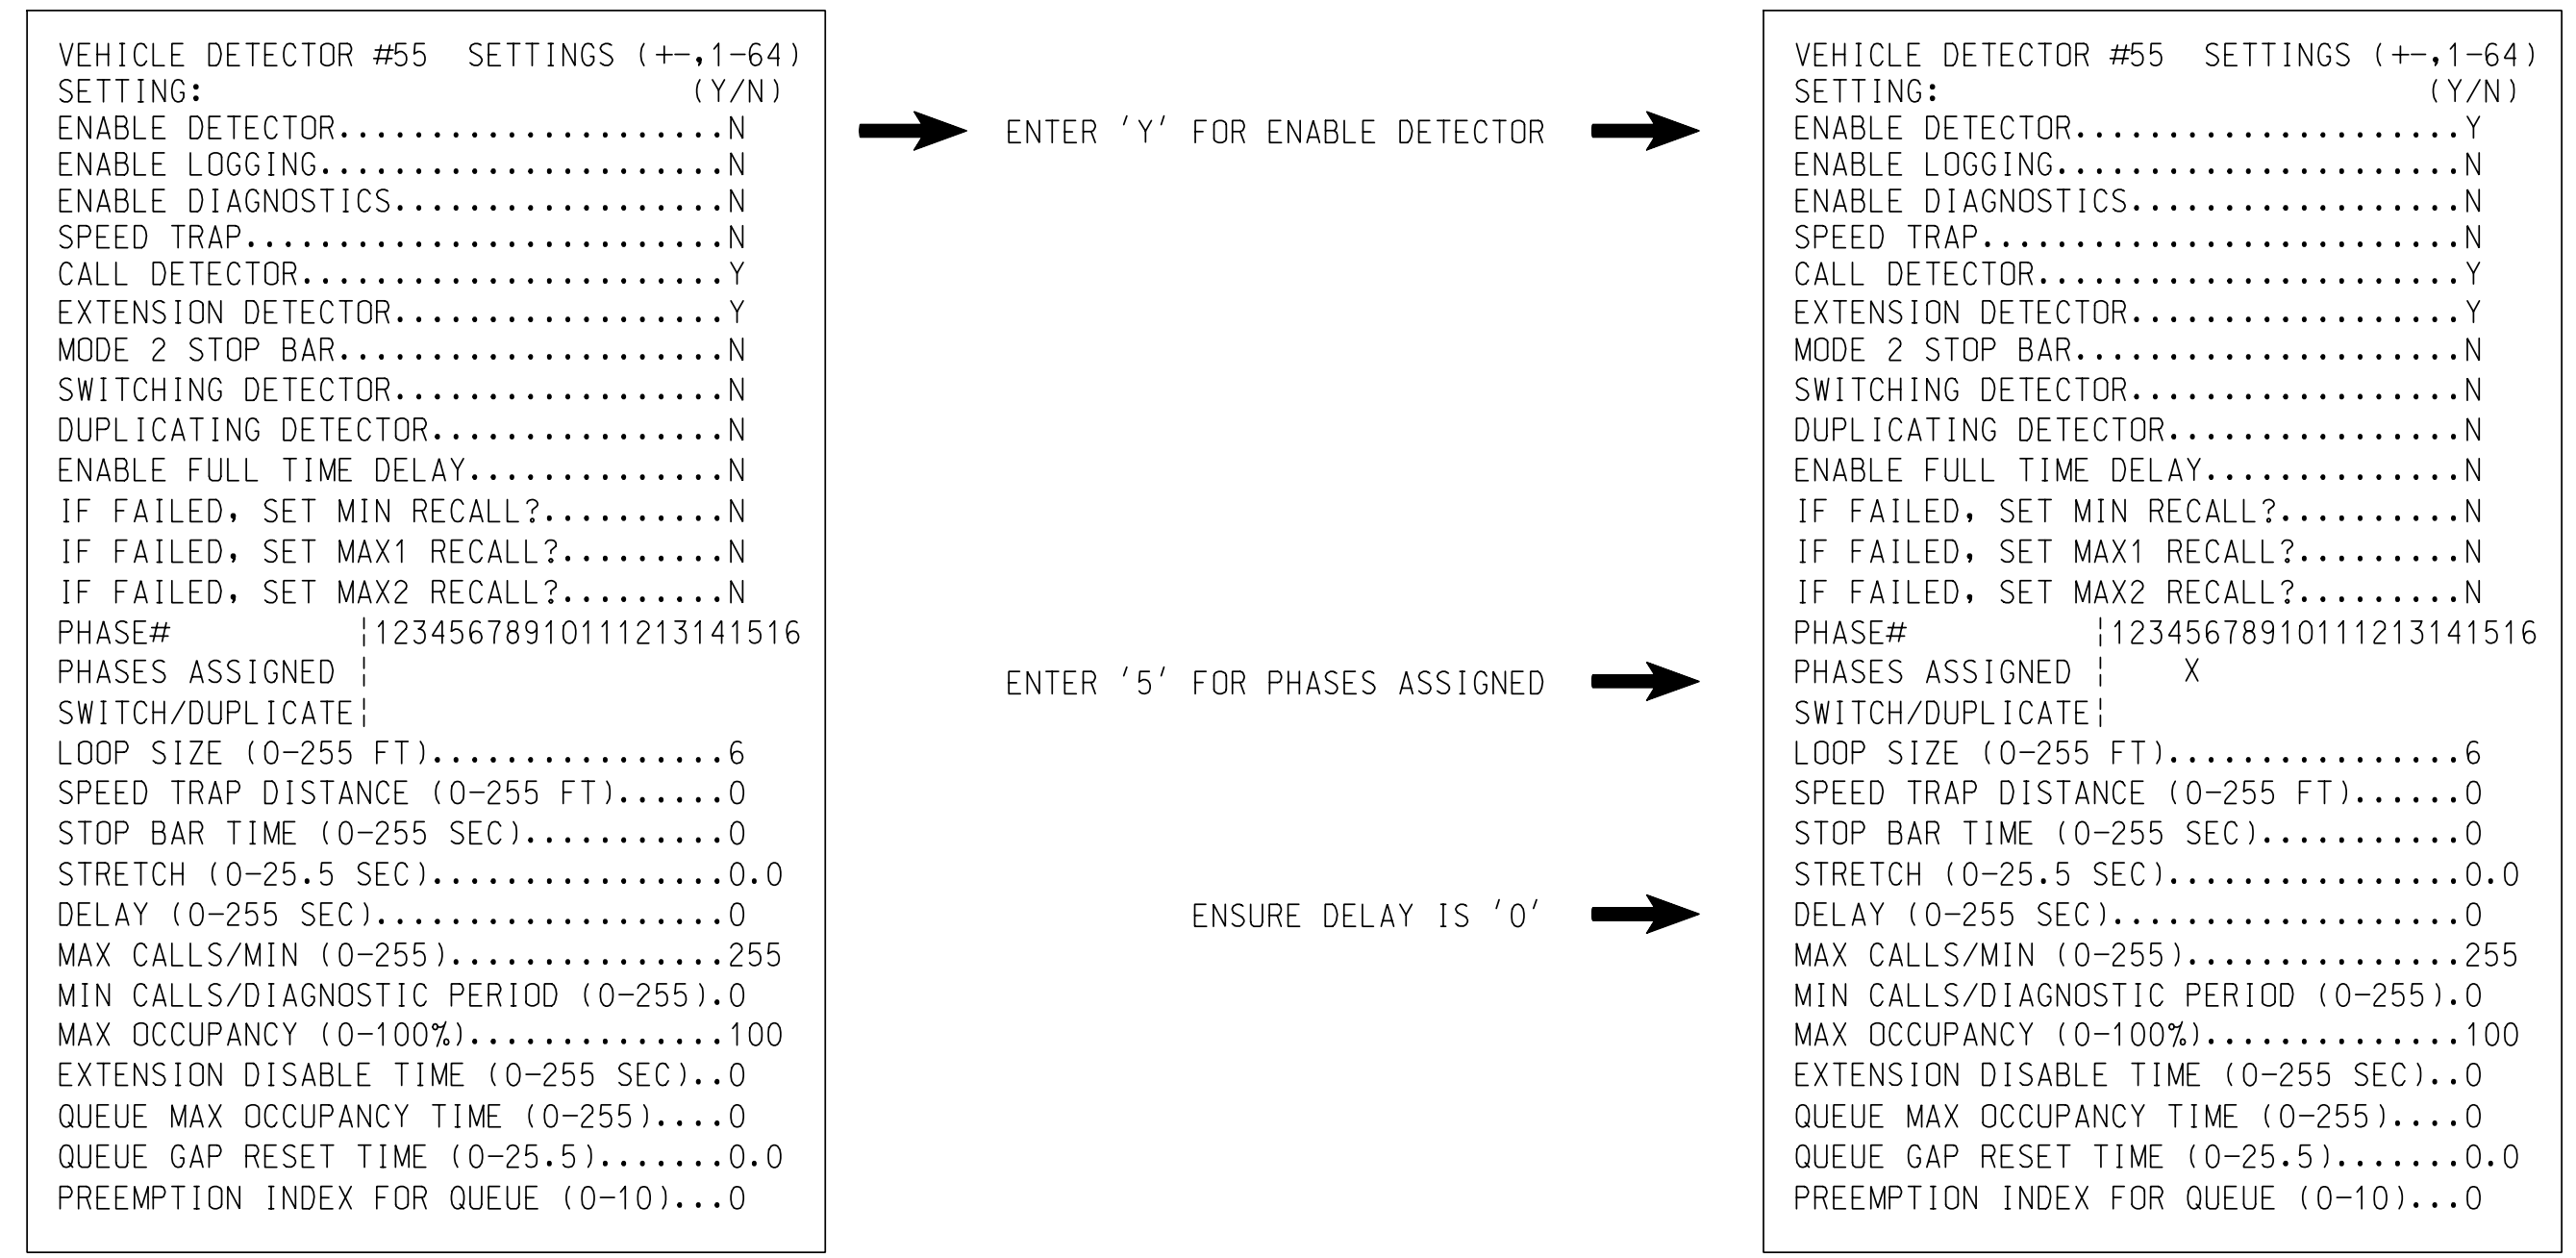

NOTE: DETECTOR IS PROGRAMMED PER THE INPUT FILE CONNECTION AND PROGRAMMING CHART SHOWN ON SHEET 1.

NC Dept of Transportation
Division of Highways
Final Drawing Date: 8/23/2022
Seal of Kevin P. Baumann, Professional Engineer
ITS & Signals Unit

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 08-0435
DESIGNED: May 2022
SEALED: 8/10/2022
REVISED: N/A

Electrical Detail - Sheet 5 of 7

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL
NORTH CAROLINA PROFESSIONAL ENGINEER
KEVIN P. BAUMANN
8/10/2022

Prepared For:

PLANS PREPARED IN THE OFFICE OF:
Kimley-Horn
NC License #F-0102
421 Fayetteville Street, Suite 600
Raleigh, NC 27601
(919) 677-2000

Division 8 Chatham County Pittsboro

PLAN DATE: May 2022 REVIEWED BY: KP Baumann

PREPARED BY: SP Pennington REVIEWED BY:

REVISIONS	INIT.	DATE

SIG. INVENTORY NO. 08-0435

8/9/2022 6:15:44 PM susan.pennington ***:timley-horn.com\SEC...RAL\RAL...T\DK...SIGNAL\SMD\2325040 Chatham - Northwoods Signal Phase 3.654 - Signal Des\gm080435-202205-dgn

INPUT PAGE 2 ASSIGNMENT PROGRAMMING DETAIL FOR ALTERNATE PHASING - LOOP 7A

(program controller as shown below)

NOTES: 1. THIS PROGRAMMING APPLIES FOR INPUT PAGE 2 ONLY. INPUT PAGE 1 WILL USE STANDARD DEFAULT SETTINGS. THIS PROGRAMMING IS NECESSARY FOR PROPER DETECTOR OPERATION DURING ALTERNATE PHASING OPERATION.

2. THE FIRST TASK THIS PROGRAMMING ACCOMPLISHES IS THE DISABLING OF INPUT #11 (DETECTOR 24) SO THAT A VEHICLE CALL WILL NOT BE PLACED TO PHASE 4 DURING ALTERNATE PHASING OPERATION. THE SECOND TASK THIS PROGRAMMING ACCOMPLISHES IS THAT IT REASSIGNS DETECTOR 57 TO INPUT #19 SO THAT THE DELAY ON LOOP 7A CAN BE REDUCED FROM 15 SECONDS TO 3 SECONDS.

FROM MAIN MENU PRESS '5' (INPUTS), THEN PRESS 'NEXT' TO GET TO INPUT PAGE '2'. PRESS THE '+' KEY UNTIL INPUT 11 IS REACHED.

PAGE: 2 C1 PIN:49 VEHICLE DETECTOR INPUT ASSIGNMENT #...11 DEBOUNCE TIME (0-25.5 SEC)...0.5 DELAY TIME (0-25.5 SEC)...0.0 HOLD-OVER TIME (0-25.5 SEC)...0.0 ASSIGNMENT SELECTION: NOT ENABLED (Y/N)...Y VEHICLE DETECTOR (1-64)...24 PEDESTRIAN DETECTOR (1-16)... ALTERNATE PED DETECTOR (1-16)... PREEMPT (1-10)... INVERTED PREEMPT (1-10)... STOP TIME (Y/N)... FLASH SENSE (Y/N)... DOOR OPEN (Y/N)... MANUAL CONTROL ENABLE (Y/N)... MANUAL CONTROL ADVANCE (Y/N)... SPECIAL FUNCTION ALARM (1-8)... TOD HOUR SYNCHRONIZATION (0-23)... FORCE OFF RING (1-4)... HOLD PHASES (1-16)... PLAN (65=FLSH,66=FREE)... OFFSET#... CHANGE PHASE SEQUENCE PAGE (1-12)... CHANGE PHASE TIMING PAGE (1-4)... CHANGE PHASE CONTROL PAGE (1-4)... CHANGE OVERLAP CONTROL PAGE (1-4)... CHANGE INPUT PAGE (1-4)... CHANGE OUTPUT PAGE (1-4)... OVERRIDE PHASE CONTROL FUNCTION (Y)...

ENTER A 'Y' FOR NOT ENABLED
DEFAULT DETECTOR NUMBER WILL REMAIN UNTIL 'NOT ENABLED' IS ENTERED.

(LOOP 7A - PHASE 4)

PAGE: 2 C1 PIN:49 NOT ENABLED INPUT ASSIGNMENT #...11 DEBOUNCE TIME (0-25.5 SEC)...0.5 DELAY TIME (0-25.5 SEC)...0.0 HOLD-OVER TIME (0-25.5 SEC)...0.0 ASSIGNMENT SELECTION: NOT ENABLED (Y/N)...Y VEHICLE DETECTOR (1-64)... PEDESTRIAN DETECTOR (1-16)... ALTERNATE PED DETECTOR (1-16)... PREEMPT (1-10)... INVERTED PREEMPT (1-10)... STOP TIME (Y/N)... FLASH SENSE (Y/N)... DOOR OPEN (Y/N)... MANUAL CONTROL ENABLE (Y/N)... MANUAL CONTROL ADVANCE (Y/N)... SPECIAL FUNCTION ALARM (1-8)... TOD HOUR SYNCHRONIZATION (0-23)... FORCE OFF RING (1-4)... HOLD PHASES (1-16)... PLAN (65=FLSH,66=FREE)... OFFSET#... CHANGE PHASE SEQUENCE PAGE (1-12)... CHANGE PHASE TIMING PAGE (1-4)... CHANGE PHASE CONTROL PAGE (1-4)... CHANGE OVERLAP CONTROL PAGE (1-4)... CHANGE INPUT PAGE (1-4)... CHANGE OUTPUT PAGE (1-4)... OVERRIDE PHASE CONTROL FUNCTION (Y)...

PRESS '+' TO ADVANCE TO INPUT 19

PAGE: 2 C1 PIN:57 VEHICLE DETECTOR INPUT ASSIGNMENT #...19 DEBOUNCE TIME (0-25.5 SEC)...0.5 DELAY TIME (0-25.5 SEC)...0.0 HOLD-OVER TIME (0-25.5 SEC)...0.0 ASSIGNMENT SELECTION: NOT ENABLED (Y/N)... VEHICLE DETECTOR (1-64)...7 PEDESTRIAN DETECTOR (1-16)... ALTERNATE PED DETECTOR (1-16)... PREEMPT (1-10)... INVERTED PREEMPT (1-10)... STOP TIME (Y/N)... FLASH SENSE (Y/N)... DOOR OPEN (Y/N)... MANUAL CONTROL ENABLE (Y/N)... MANUAL CONTROL ADVANCE (Y/N)... SPECIAL FUNCTION ALARM (1-8)... TOD HOUR SYNCHRONIZATION (0-23)... FORCE OFF RING (1-4)... HOLD PHASES (1-16)... PLAN (65=FLSH,66=FREE)... OFFSET#... CHANGE PHASE SEQUENCE PAGE (1-12)... CHANGE PHASE TIMING PAGE (1-4)... CHANGE PHASE CONTROL PAGE (1-4)... CHANGE OVERLAP CONTROL PAGE (1-4)... CHANGE INPUT PAGE (1-4)... CHANGE OUTPUT PAGE (1-4)... OVERRIDE PHASE CONTROL FUNCTION (Y)...

ENTER '57' TO REASSIGN THE VEHICLE DETECTOR FOR THIS INPUT

(LOOP 7A - PHASE 7)

PAGE: 2 C1 PIN:57 VEHICLE DETECTOR INPUT ASSIGNMENT #...19 DEBOUNCE TIME (0-25.5 SEC)...0.5 DELAY TIME (0-25.5 SEC)...0.0 HOLD-OVER TIME (0-25.5 SEC)...0.0 ASSIGNMENT SELECTION: NOT ENABLED (Y/N)... VEHICLE DETECTOR (1-64)...57 PEDESTRIAN DETECTOR (1-16)... ALTERNATE PED DETECTOR (1-16)... PREEMPT (1-10)... INVERTED PREEMPT (1-10)... STOP TIME (Y/N)... FLASH SENSE (Y/N)... DOOR OPEN (Y/N)... MANUAL CONTROL ENABLE (Y/N)... MANUAL CONTROL ADVANCE (Y/N)... SPECIAL FUNCTION ALARM (1-8)... TOD HOUR SYNCHRONIZATION (0-23)... FORCE OFF RING (1-4)... HOLD PHASES (1-16)... PLAN (65=FLSH,66=FREE)... OFFSET#... CHANGE PHASE SEQUENCE PAGE (1-12)... CHANGE PHASE TIMING PAGE (1-4)... CHANGE PHASE CONTROL PAGE (1-4)... CHANGE OVERLAP CONTROL PAGE (1-4)... CHANGE INPUT PAGE (1-4)... CHANGE OUTPUT PAGE (1-4)... OVERRIDE PHASE CONTROL FUNCTION (Y)...

PROGRAMMING COMPLETE

SPECIAL DETECTOR PROGRAMMING DETAIL - LOOP 7A (ALT.)

(program controller as shown below)

FROM MAIN MENU PRESS '7' (DETECTORS), THEN PRESS '1' FOR VEHICLE DETECTORS. PRESS THE '-' KEY TO GET TO VEHICLE DETECTOR #57.

VEHICLE DETECTOR #57 SETTINGS (+,-,1-64) SETTING: (Y/N) ENABLE DETECTOR...N ENABLE LOGGING...N ENABLE DIAGNOSTICS...N SPEED TRAP...N CALL DETECTOR...Y EXTENSION DETECTOR...Y MODE 2 STOP BAR...N SWITCHING DETECTOR...N DUPLICATING DETECTOR...N ENABLE FULL TIME DELAY...N IF FAILED, SET MIN RECALL?...N IF FAILED, SET MAX1 RECALL?...N IF FAILED, SET MAX2 RECALL?...N PHASE# 12345678910111213141516 PHASES ASSIGNED 1 SWITCH/DUPLICATE 1 LOOP SIZE (0-255 FT)...6 SPEED TRAP DISTANCE (0-255 FT)...0 STOP BAR TIME (0-255 SEC)...0 STRETCH (0-25.5 SEC)...0.0 DELAY (0-255 SEC)...0.3 MAX CALLS/MIN (0-255)...255 MIN CALLS/DIAGNOSTIC PERIOD (0-255)...0 MAX OCCUPANCY (0-100%)...100 EXTENSION DISABLE TIME (0-255 SEC)...0 QUEUE MAX OCCUPANCY TIME (0-255)...0 QUEUE GAP RESET TIME (0-25.5)...0.0 PREEMPTION INDEX FOR QUEUE (0-10)...0

ENTER 'Y' FOR ENABLE DETECTOR

ENTER '7' FOR PHASES ASSIGNED

ENSURE DELAY IS '3'

VEHICLE DETECTOR #57 SETTINGS (+,-,1-64) SETTING: (Y/N) ENABLE DETECTOR...Y ENABLE LOGGING...N ENABLE DIAGNOSTICS...N SPEED TRAP...N CALL DETECTOR...Y EXTENSION DETECTOR...Y MODE 2 STOP BAR...N SWITCHING DETECTOR...N DUPLICATING DETECTOR...N ENABLE FULL TIME DELAY...N IF FAILED, SET MIN RECALL?...N IF FAILED, SET MAX1 RECALL?...N IF FAILED, SET MAX2 RECALL?...N PHASE# 12345678910111213141516 PHASES ASSIGNED 1 X SWITCH/DUPLICATE 1 LOOP SIZE (0-255 FT)...6 SPEED TRAP DISTANCE (0-255 FT)...0 STOP BAR TIME (0-255 SEC)...0 STRETCH (0-25.5 SEC)...0.0 DELAY (0-255 SEC)...0.3 MAX CALLS/MIN (0-255)...255 MIN CALLS/DIAGNOSTIC PERIOD (0-255)...0 MAX OCCUPANCY (0-100%)...100 EXTENSION DISABLE TIME (0-255 SEC)...0 QUEUE MAX OCCUPANCY TIME (0-255)...0 QUEUE GAP RESET TIME (0-25.5)...0.0 PREEMPTION INDEX FOR QUEUE (0-10)...0

DETECTOR PROGRAMMING COMPLETE

NOTE: DETECTOR IS PROGRAMMED PER THE INPUT FILE CONNECTION AND PROGRAMMING CHART SHOWN ON SHEET 1.

NC Dept of Transportation Division of Highways Final Drawing Date: 8/23/2022 ITS & Signals Unit

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 08-0435 DESIGNED: May 2022 SEALED: 8/10/2022 REVISED: N/A

Electrical Detail - Sheet 6 of 7

ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared For: City of Chatham Mobility and Safety Division City of Chatham Department of Transportation & Signal Management

US 15-501 at Charger Boulevard/ Mosaic Drive Division 8 Chatham County Pittsboro PLAN DATE: May 2022 REVIEWED BY: KP Baumann PREPARED BY: SP Pennington REVISIONS INIT. DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED SEAL NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 044434 KEVIN P. BAUMANN 8/10/2022

PLANS PREPARED IN THE OFFICE OF: KimleyHorn 421 Fayetteville Street, Suite 600 Raleigh, NC 27601 (919) 677-2000

8/9/2022 6:15:46 PM susan.pennington msk:imley-horn.com:SE...RAL:WRL...JTDK...SIGNALS:WPhase 3.654 - Signal - Des:gm080435-202206-dgn

ALTERNATE PHASING ACTIVATION DETAIL

TO RUN ALT. PHASING DURING COORDINATION - SELECT ALL PAGE CHANGES (AS SHOWN BELOW) WITHIN COORDINATION PLAN PROGRAMMING.

TO RUN ALT. PHASING DURING FREE RUN - PROGRAM PAGE CHANGES (SHOWN BELOW) IN SEPARATE TIME OF DAY EVENTS. IF PAGE 1 IS USED, NO EVENT PROGRAMMING IS NECESSARY FOR THAT PARTICULAR PAGE.

<u>PHASING</u>	<u>INPUTS PAGE</u>	<u>OVERLAPS PAGE</u>
ACTIVE PAGES REQUIRED TO RUN <u>DEFAULT PHASING</u>	1	1
ACTIVE PAGES REQUIRED TO RUN <u>ALTERNATE PHASING</u>	2	2

NOTE: PAGES NOT SHOWN (i.e. sequence, phase control, etc.) SHOULD REMAIN AS '1', OR AS DEFINED BY TIMING ENGINEER.

IMPORTANT: IF ALT. PHASING IS USED DURING FREE RUN AND COORDINATION, DO NOT OPERATE TIME OF DAY PAGE CHANGE EVENTS CONCURRENTLY WITH COORDINATION PLAN EVENTS IN THE EVENT SCHEDULER. (EX. FREE RUN PAGE CHANGE EVENT SHOULD END BEFORE COORDINATION PLAN EVENT STARTS AND VICE-VERSA).

ALTERNATE PHASING PAGE CHANGE SUMMARY

THE FOLLOWING IS A SUMMARY OF WHAT TAKES PLACE WHEN THESE OVERLAP/INPUT PAGE CHANGES ACTIVATE TO CALL THE "ALTERNATE PHASING":

- OVERLAPS PAGE 2: Modifies overlap parent phases for heads 11, 31, 51, and 71 to run protected turns only.
- INPUTS PAGE 2: Disables phase 6 call on loop 1A and reduces delay time for phase 1 call on loop 1A to 0 seconds.
Disables phase 8 call on loop 3A and reduces delay time for phase 3 call on loop 3A to 0 seconds.
Disables phase 2 call on loop 5A and reduces delay time for phase 5 call on loop 5A to 0 seconds.
Disables phase 4 call on loop 7A and reduces delay time for phase 7 call on loop 7A to 3 seconds.

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO ENSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

- ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
- ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
- REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

NC Dept of Transportation
Division of Highways
Final Drawing Date: 8/23/2022
Designed by: *Chang Boak*
ITS & Signals Unit

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 08-0435
DESIGNED: May 2022
SEALED: 8/10/2022
REVISED: N/A

Electrical Detail - Sheet 7 of 7

PLANS PREPARED IN THE OFFICE OF:
Kimley»Horn
NC License #F-0102
421 Fayetteville Street, Suite 600
Raleigh, NC 27601
(919) 677-2000

ELECTRICAL AND PROGRAMMING DETAILS FOR:
Prepared For:


750 N. Greenfield Pkwy, Garner, NC 27529

US 15-501
at
Charger Boulevard/
Mosaic Drive
Division 8 Chatham County Pittsboro
PLAN DATE: May 2022 REVIEWED BY: KP Baumann
PREPARED BY: SP Pennington REVIEWED BY:
REVISIONS INIT. DATE

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED
SEAL
NORTH CAROLINA PROFESSIONAL ENGINEERS
SEAL 044434
KEVIN P. BAUMANN
DocuSigned by: *Kevin P. Baumann*
8/10/2022
SIGNATURE DATE
SIG. INVENTORY NO. 08-0435

8/9/2022 6:15:48 PM susan.pennington ***kimley-horn.com\SE...RAL\RAL-T\DK-SIGNAL\SMD\2325040 Chatham - Northwoods Signal\Phase 3\654 - Signal Design\080435-2022et.dgn


DEFAULT PHASING DIAGRAM

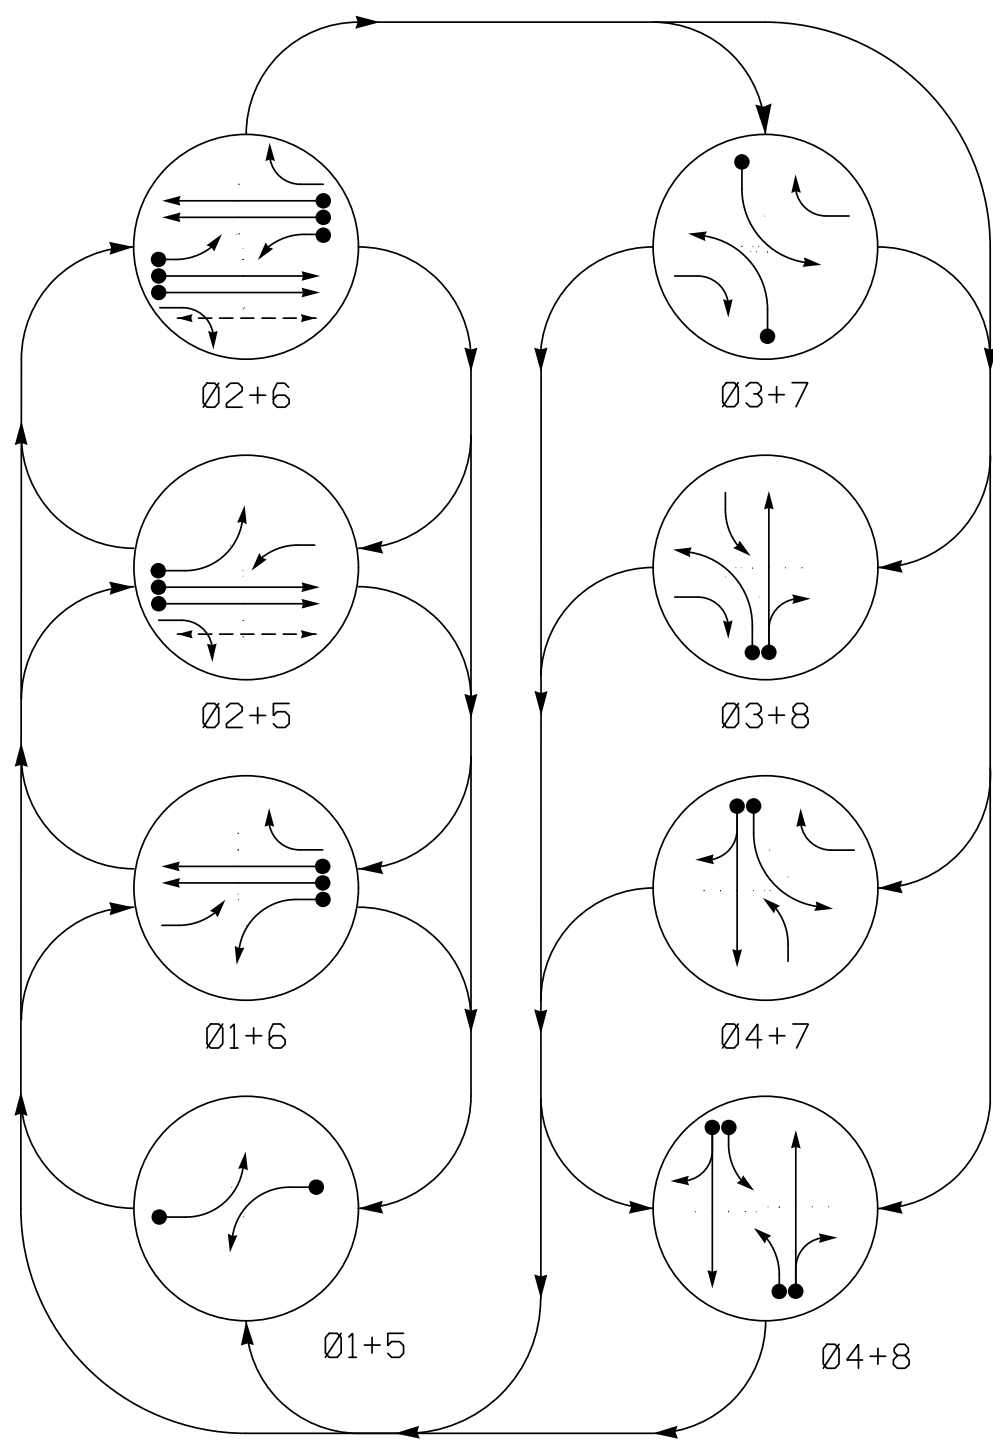

DEFAULT PHASING TABLE OF OPERATION

SIGNAL FACE	PHASE							
	01+5	02+6	03+7	04+8	01+6	02+5	03+8	04+7
11	←	←	←	←	←	←	←	←
21	R	R	G	G	R	R	R	Y
22	R	R	G	G	R	R	R	Y
31	←	←	←	←	←	←	←	←
41, 42	R	R	R	R	R	R	G	G
51	←	←	←	←	←	←	←	←
61	R	G	R	G	R	R	R	Y
62	R	G	R	G	R	R	R	Y
71	←	←	←	←	←	←	←	←
81, 82	R	R	R	R	G	R	G	R
P21, P22	DW	DW	W	W	DW	DW	DW	DRK


ALTERNATE PHASING DIAGRAM

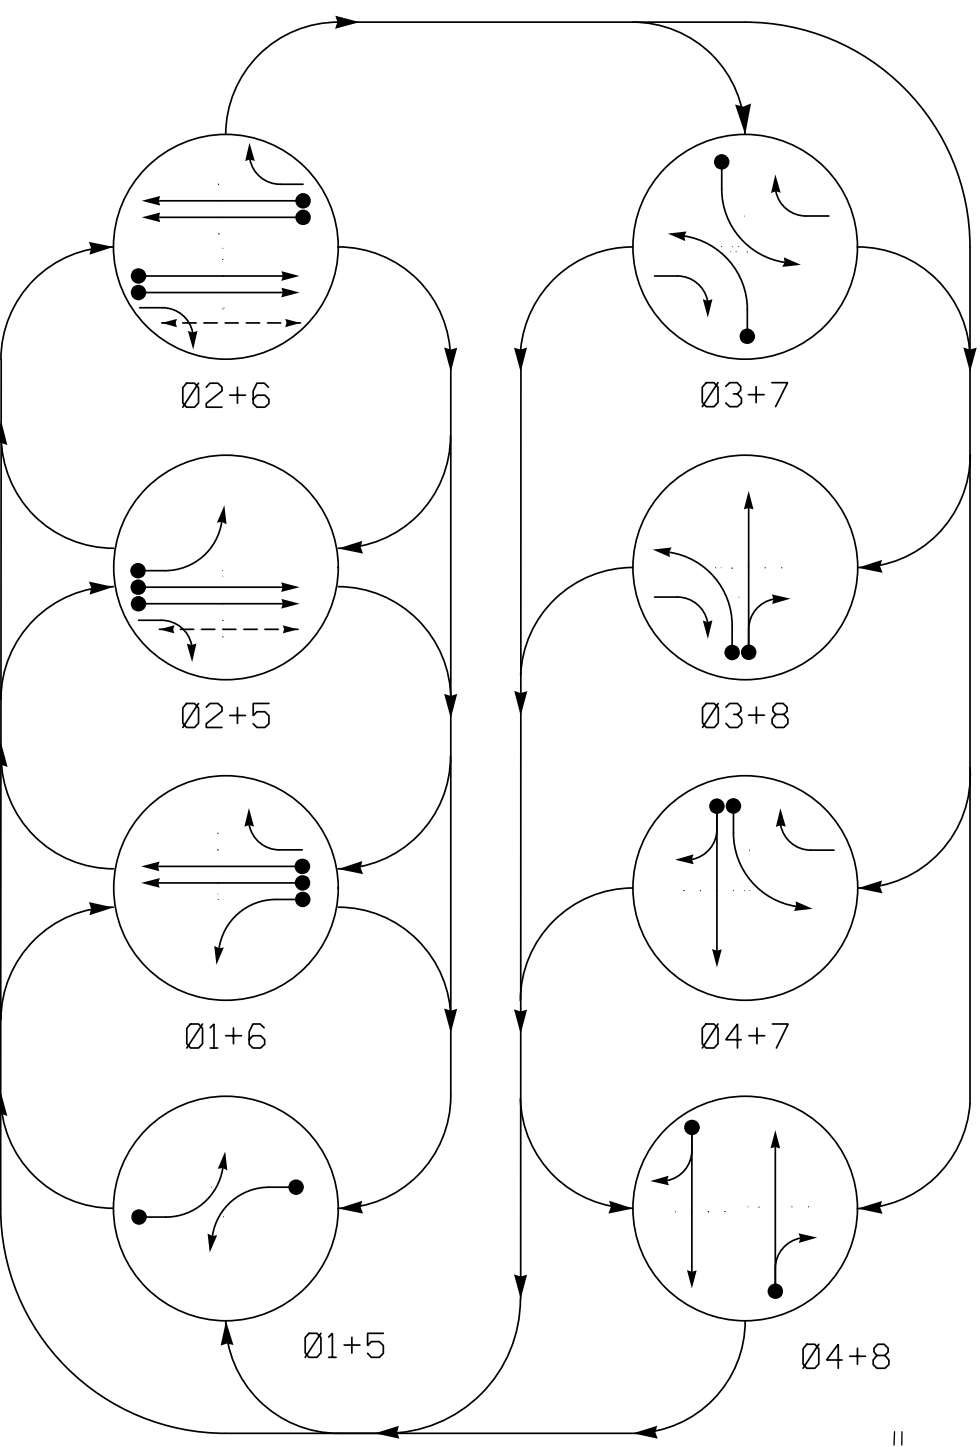

ALTERNATE PHASING TABLE OF OPERATION

SIGNAL FACE	PHASE							
	01+5	02+6	03+7	04+8	01+6	02+5	03+8	04+7
11	←	←	←	←	←	←	←	←
21	R	R	G	G	R	R	R	Y
22	R	R	G	G	R	R	R	Y
31	←	←	←	←	←	←	←	←
41, 42	R	R	R	R	R	R	G	G
51	←	←	←	←	←	←	←	←
61	R	G	R	G	R	R	R	Y
62	R	G	R	G	R	R	R	Y
71	←	←	←	←	←	←	←	←
81, 82	R	R	R	R	G	R	G	R
P21, P22	DW	DW	W	W	DW	DW	DW	DRK

SIGNAL FACE I.D.

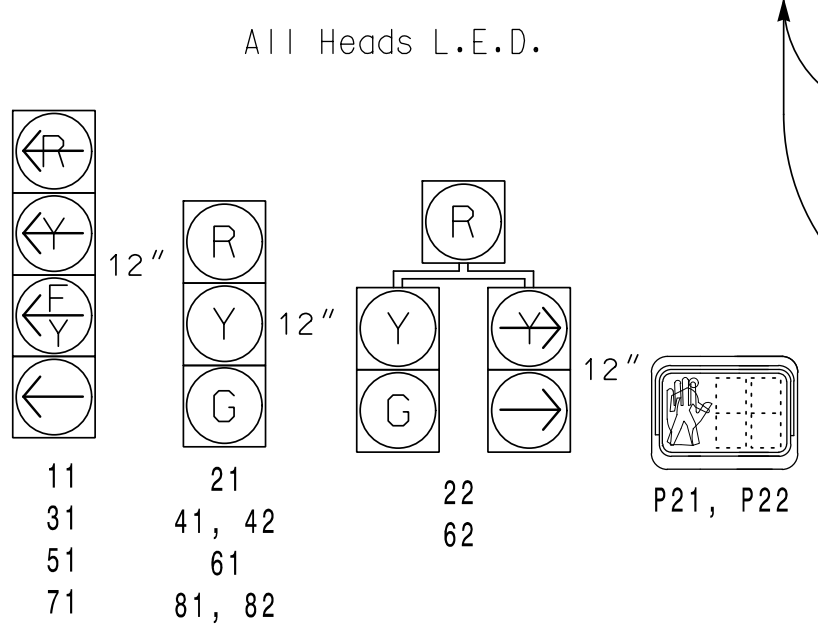

PHASING DIAGRAM DETECTION LEGEND

- ← ● → DETECTED MOVEMENT
- ← ○ → UNDETECTED MOVEMENT (OVERLAP)
- ← ○ → UNSIGNALIZED MOVEMENT
- ← ○ → PEDESTRIAN MOVEMENT

OASIS 2070 LOOP & DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	DETECTOR PROGRAMMING				STRETCH TIME	DELAY TIME	LOOP SYSTEM	NEW CARD
					PHASE	CALLING	EXTENSION	FULL TIME DELAY				
1A	6X40	+5	2-4-2	-	1	Y	Y	-	-	*15	-	-
2A/S7	6X6	420	Exist	-	2	Y	Y	-	-	-	Y	-
2B/S8	6X6	420	Exist	-	2	Y	Y	-	-	-	Y	-
3A	6X40	+5	2-4-2	Y	3	Y	Y	-	-	*15	-	-
4A	6X40	+5	2-4-2	-	4	Y	Y	-	-	10	-	-
5A	6X40	+5	2-4-2	-	5	Y	Y	-	-	*15	-	-
6A/S11	6X6	420	Exist	-	6	Y	Y	-	-	-	Y	-
6B/S12	6X6	420	Exist	-	6	Y	Y	-	-	-	Y	-
7A	6X40	+5	2-4-2	-	7	Y	Y	-	-	*15	-	-
8A	6X40	+5	2-4-2	Y	8	Y	Y	-	-	10	-	-
S9	6X6	+300	Exist	-	SYS	-	-	-	-	-	Y	-
S10	6X6	+300	Exist	-	SYS	-	-	-	-	-	Y	-

- * Disable Delay during Alternate Phasing operation.
- ** Reduce Delay to 3 sec. during Alternate Phasing operation.
- # Disable phase call for loop during Alternate Phasing operation.


8 PHASE FULLY ACTUATED (US 15-501 CLS)
Signal System#: D08_25_PITTSBORO

NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018, "Standard Specifications for Roads and Structures" dated January 2018, and all applicable sections of the latest version of the generic Project Special Provisions. The PSP can be accessed at the following website: <https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Set all detector units to presence mode.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- The Division Traffic Engineer will determine the hours of use for each phasing plan.
- Closed loop system data:
Master Asset #10825, Controller Asset #0435.
- All metal poles and pedestrian pedestals to be painted black.
- Re-wire all existing loops back to cabinet.

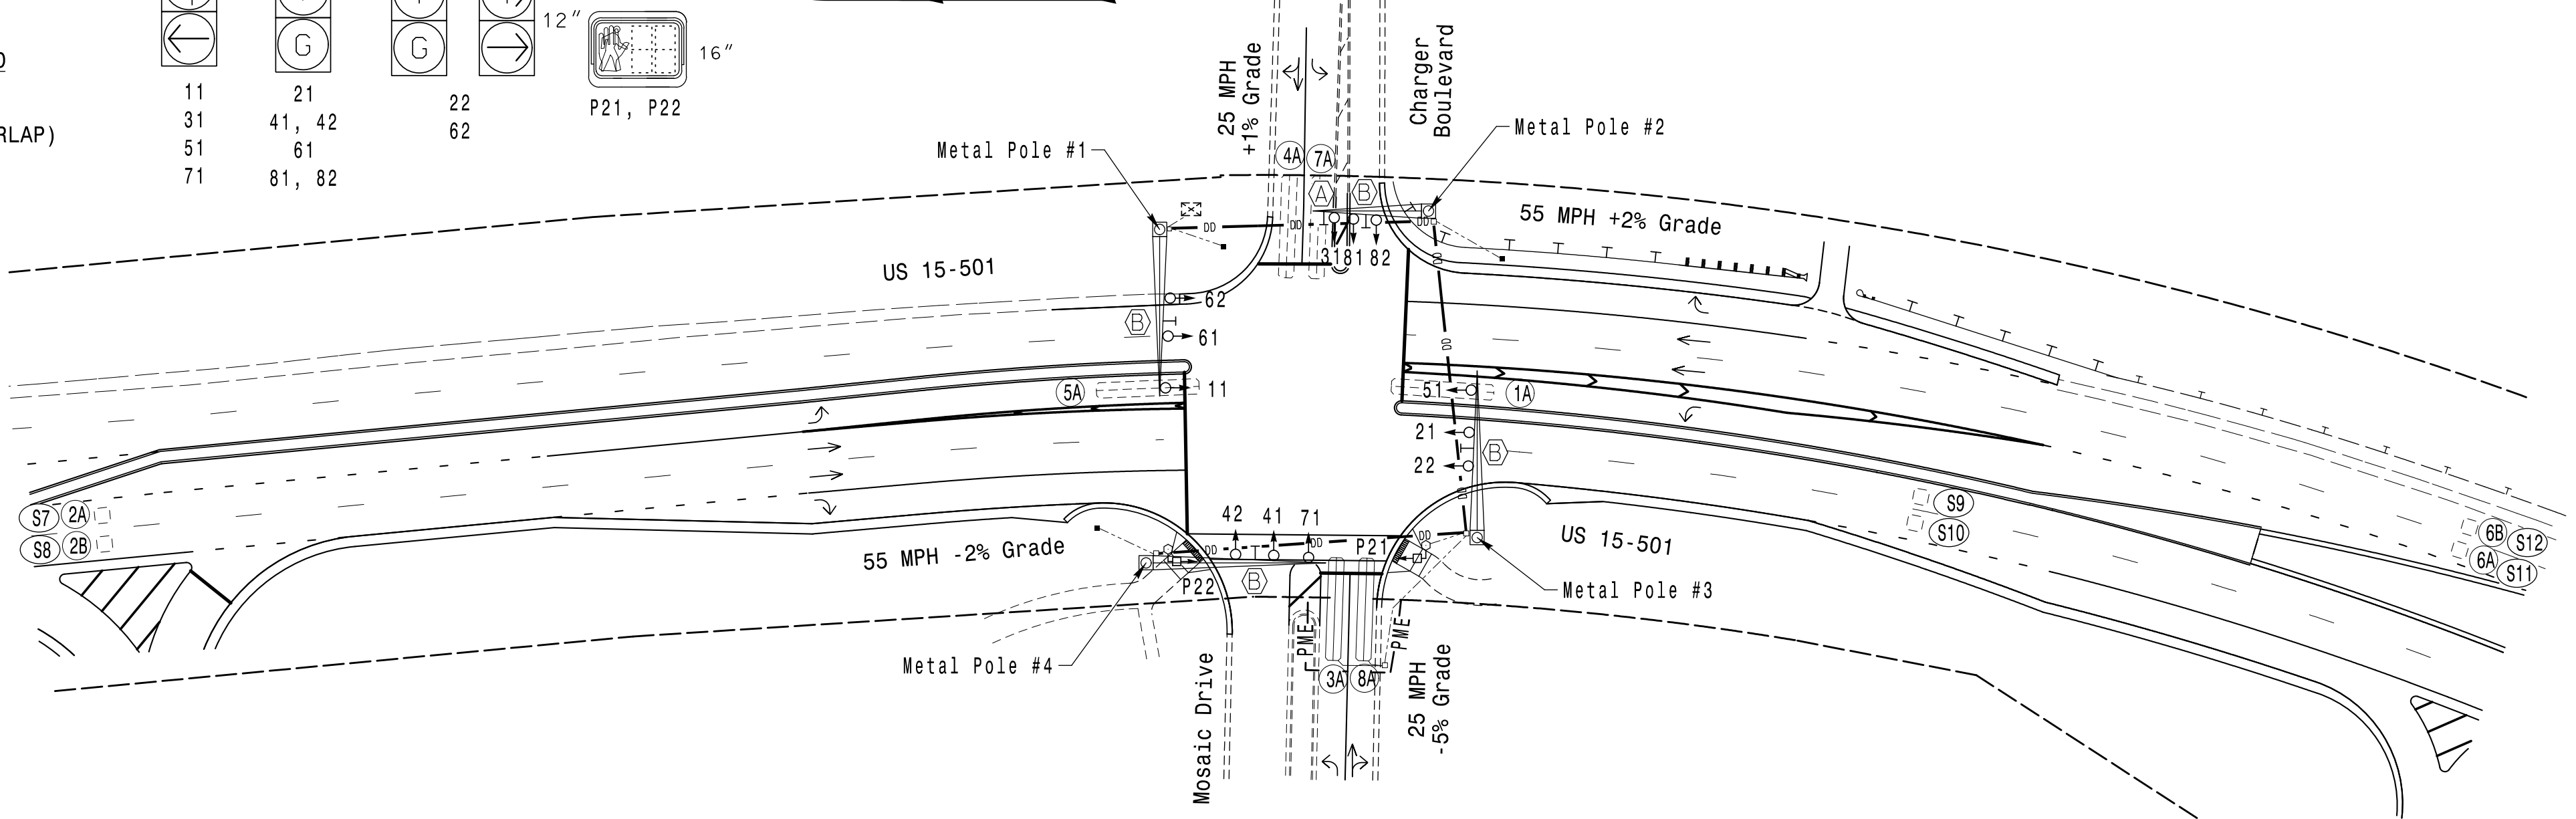

PAVEMENT MARKINGS AND POLE LOCATION DIAGRAM

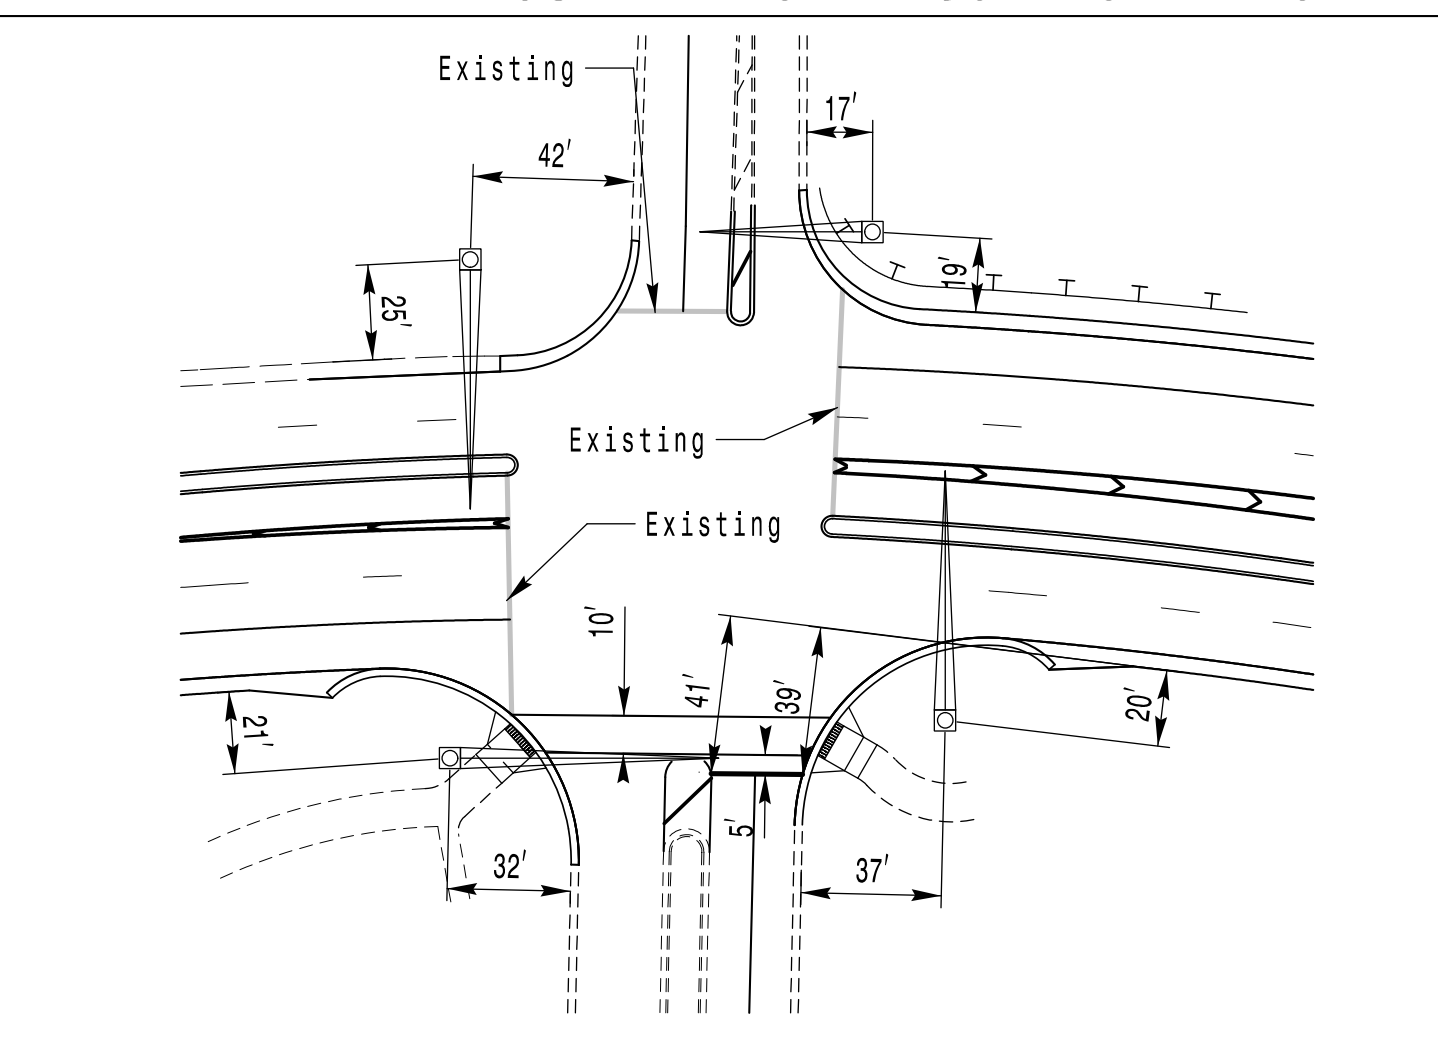

OASIS 2070 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green 1 *	7	14	7	7	7	14	7	7
Extension 1 *	2.0	6.0	2.0	2.0	2.0	6.0	2.0	2.0
Max Green 1 *	20	90	20	25	20	90	20	25
Yellow Clearance	3.0	5.4	3.1	3.5	3.0	5.4	3.0	3.5
Red Clearance	2.9	1.0	3.1	3.2	2.9	1.0	2.4	3.2
Walk 1 *	-	7	-	-	-	-	-	-
Don't Walk 1	-	18	-	-	-	-	-	-
Seconds Per Actuation *	-	1.5	-	-	-	1.5	-	-
Max Variable Initial *	-	46	-	-	-	46	-	-
Time Before Reduction *	-	15	-	-	-	15	-	-
Time To Reduce *	-	45	-	-	-	45	-	-
Minimum Gap	-	3.4	-	-	-	3.4	-	-
Recall Mode	-	MIN RECALL	-	-	-	MIN RECALL	-	-
Vehicle Call Memory	-	YELLOW	-	-	-	YELLOW	-	-
Dual Entry	-	-	-	ON	-	-	-	ON
Simultaneous Gap	ON	ON	ON	ON	ON	ON	ON	ON

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

LEGEND

- | PROPOSED | EXISTING |
|--|----------|
| ○ → Traffic Signal Head | ● → N/A |
| ○ → Modified Signal Head | ○ → N/A |
| ○ → Pedestrian Signal Head With Push Button & Sign | ○ → N/A |
| ○ → Type II Signal Pedestal | ○ → N/A |
| ○ → Metal Pole with Mastarm | ○ → N/A |
| ○ → Inductive Loop Detector | ○ → N/A |
| ○ → Controller & Cabinet | ○ → N/A |
| ○ → Junction Box | ○ → N/A |
| ○ → 2-in Underground Conduit | ○ → N/A |
| ○ → Directional Drill | ○ → N/A |
| ○ → Right of Way | ○ → N/A |
| ○ → Permanent Maintenance Easement | ○ → PME |
| ○ → Guardrail | ○ → N/A |
| ○ → Directional Arrow | ○ → N/A |
| ○ → Curb Ramp | ○ → N/A |
| ○ → "U-TURN YIELD TO RIGHT TURN" Sign (R10-16) | ○ → N/A |
| ○ → Street Name Sign (D3-1) | ○ → N/A |

NC Dept of Transportation
Division of Highways
Final Drawing Date: 8/23/2022
ITS & Signals Unit

Signal Upgrade

Prepared For: **US 15-501 at Charger Boulevard/ Mosaic Drive**

Division 8 Chatham County Pittsboro

PLANS PREPARED IN THE OFFICE OF: **Kimley-Horn**

NC License #F-0102
421 Fayetteville Street, Suite 600
Raleigh, NC 27601
(919) 677-2000

Prepared by: **SP Pennington**
Reviewed by: **KP Baumann**

DATE: **May 2022**


REVISIONS: _____

INIT. DATE: _____

8/10/2022


SIG. INVENTORY NO. 08-0435

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

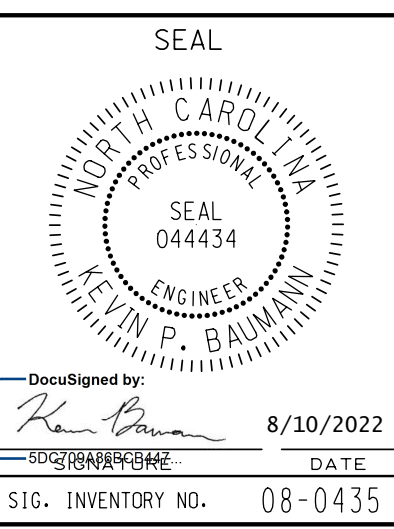


8/9/2022 6:15:35 PM susan_perminington \\k:\in\by\horv-com\SE_BALL\PTD\SIGNALS\013235040_Chattham - Northwoods Signal\Phase 1\MS4 - Signal Design\0435-2022.dgn

Design Loading for METAL POLE NO. 1

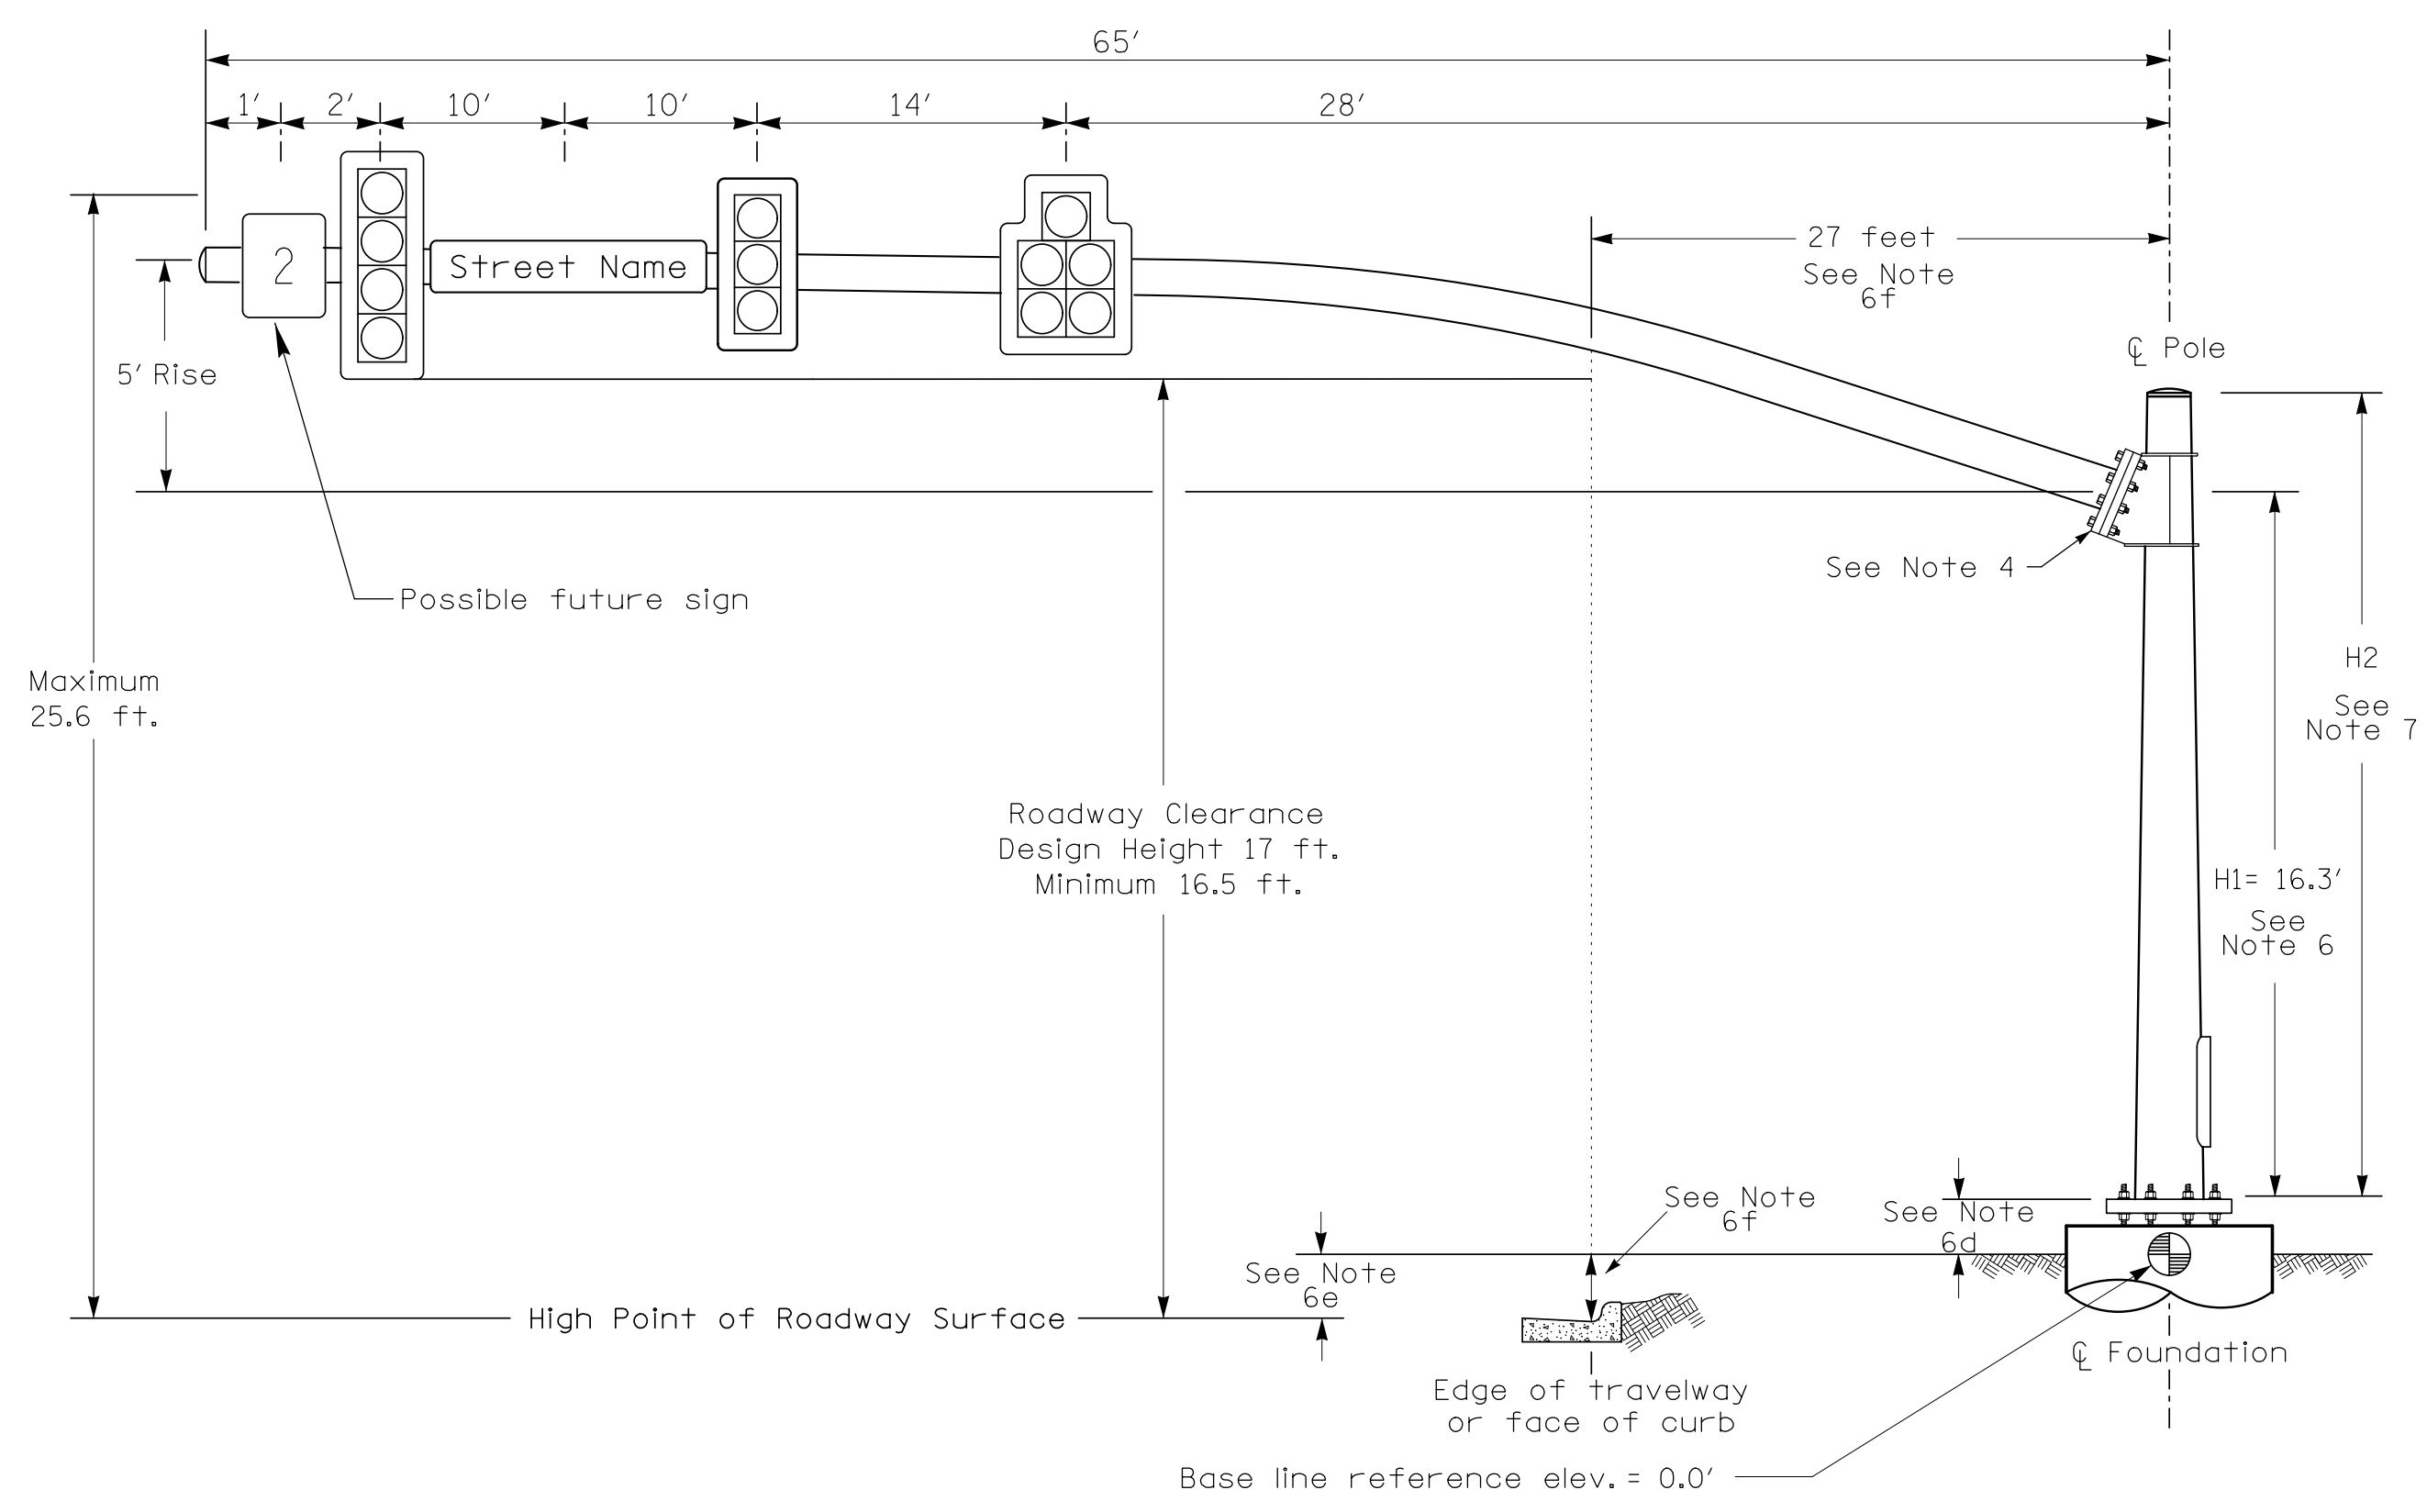

Elevation View

Design Loading for METAL POLE NO. 2

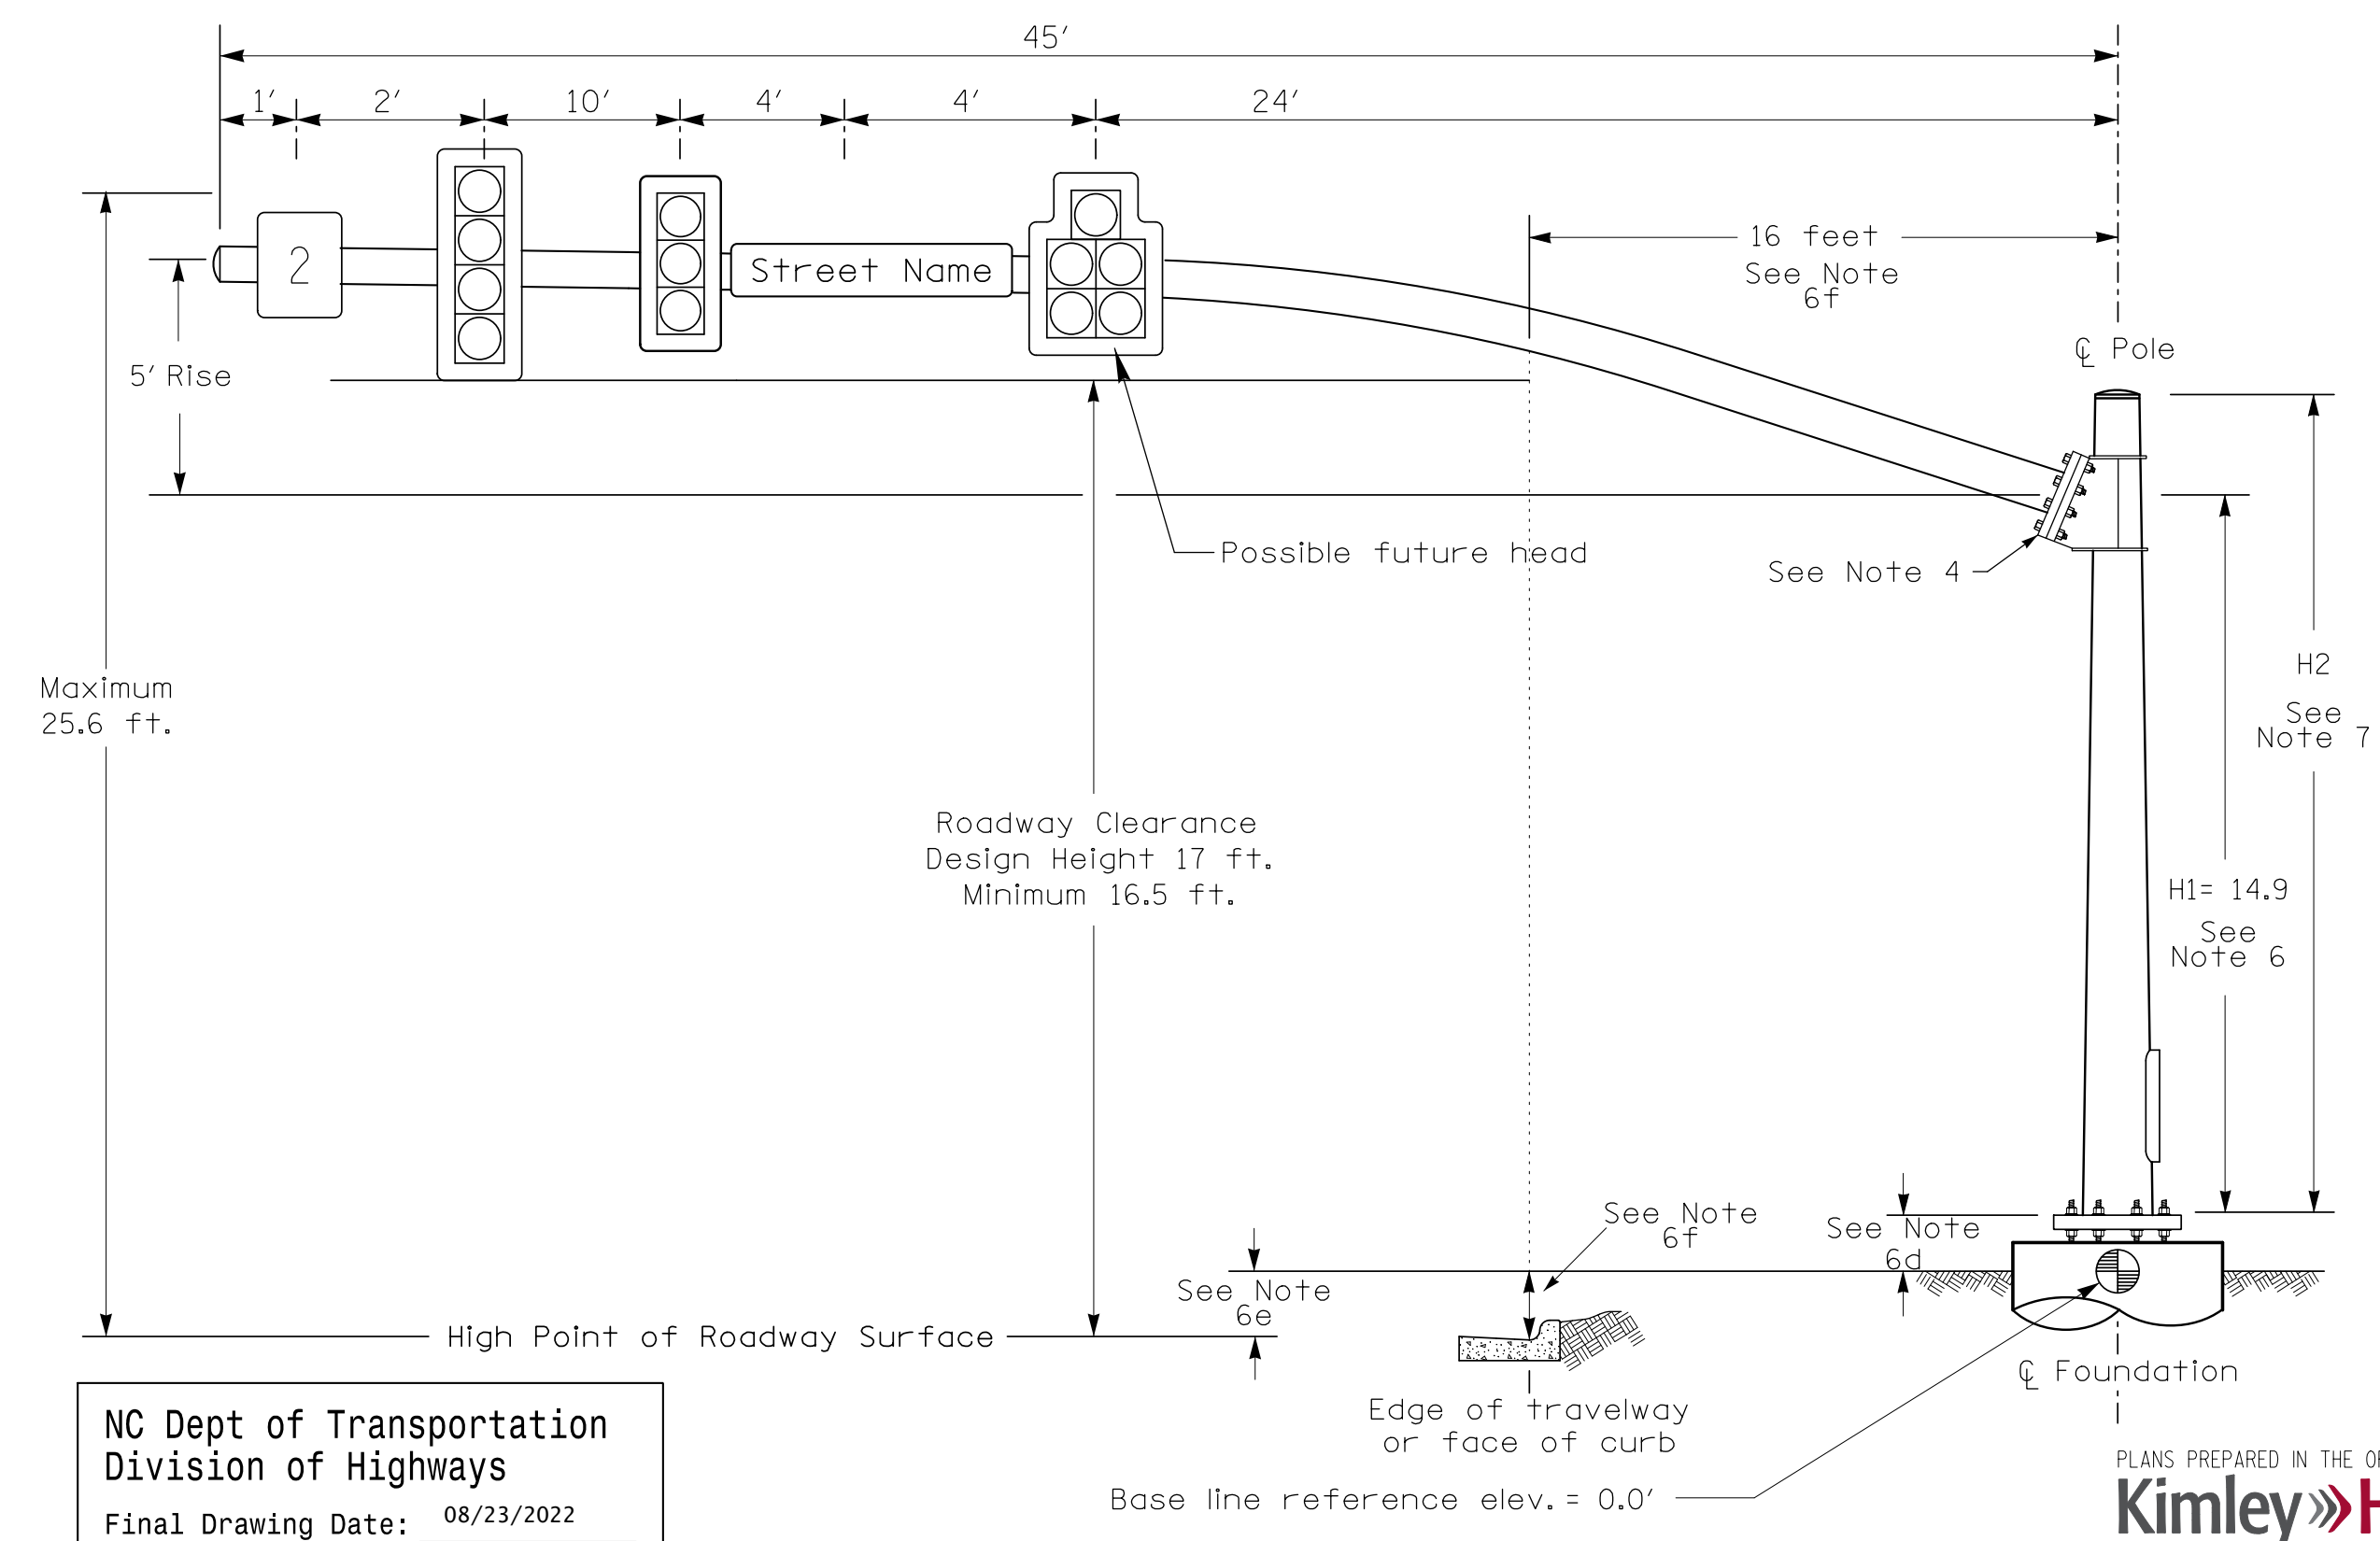


Elevation View

SPECIAL NOTE


The contractor is responsible for verifying that the mast arm attachment height (H1) will provide the "Design Height" clearance from the roadway before submitting final shop drawings for approval. Verify elevation data below which was obtained by field measurement or from available project survey data.

Elevation Data for Mast Arm Attachment (H1)


Elevation Differences for:	Pole 1	Pole 2
Baseline reference point at Foundation @ ground level	0.0 ft.	0.0 ft.
Elevation difference at High point of roadway surface	+2.3 ft.	+0.9 ft.
Elevation difference at Edge of travelway or face of curb	+2.3 ft.	+0.0 ft.

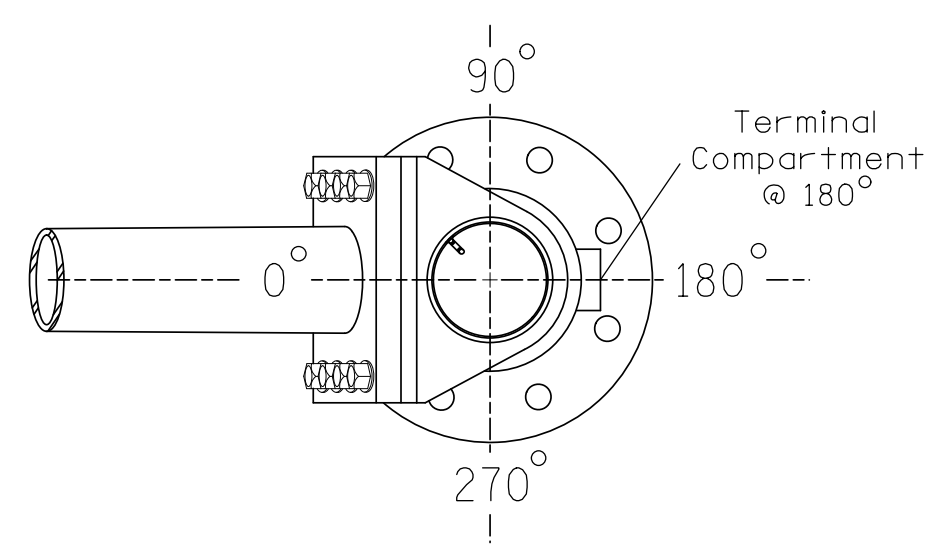

POLE RADIAL ORIENTATION

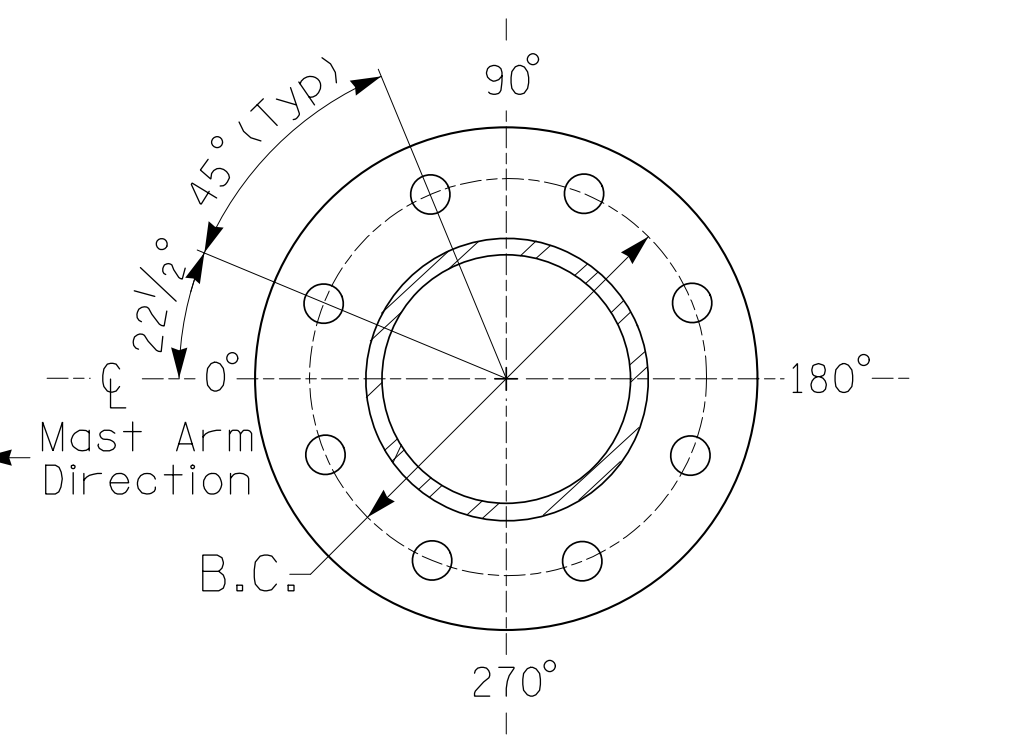

8 BOLT BASE PLATE DETAIL
See Note 5

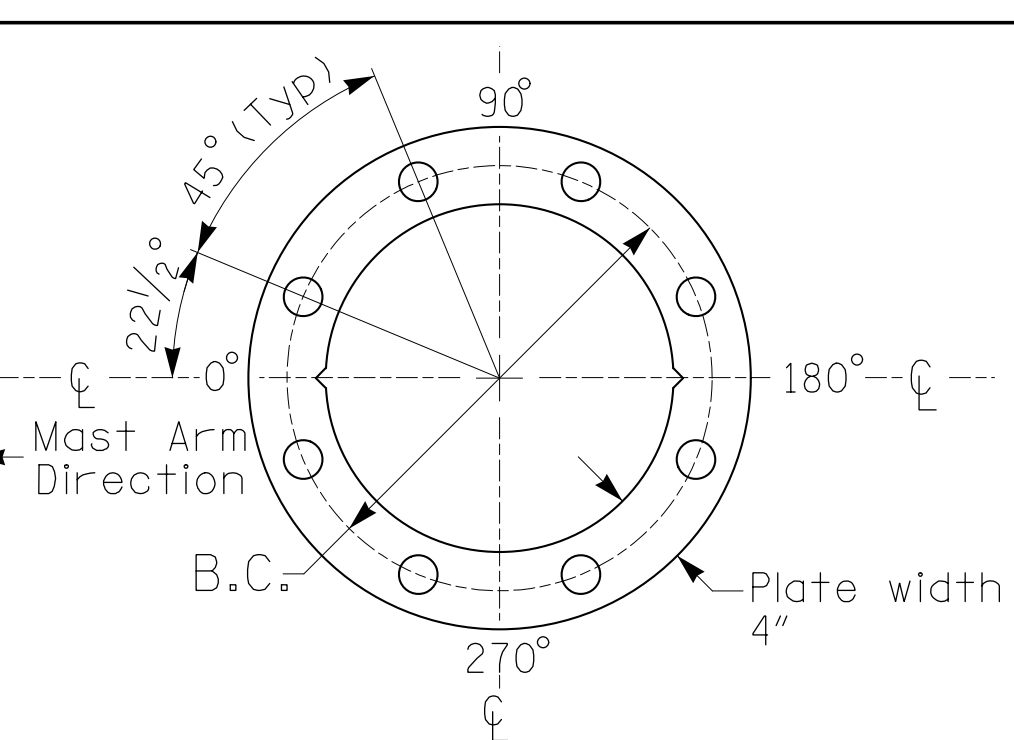

BASE PLATE TEMPLATE & ANCHOR BOLT LOCK PLATE DETAIL
For 8 Bolt Base Plate

METAL POLE No. 1 and 2

MAST ARM LOADING SCHEDULE				
LOADING SYMBOL	DESCRIPTION	AREA	SIZE	WEIGHT
	RIGID MOUNTED SIGNAL HEAD 12"-5 SECTION-WITH BACKPLATE	16.3 S.F.	42.0" W X 56.0" L	103 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5" W X 66.0" L	74 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-3 SECTION-WITH BACKPLATE	9.3 S.F.	25.5" W X 52.5" L	60 LBS
	PEDESTRIAN SIGNAL HEAD WITH MOUNTING HARDWARE	2.2 S.F.	18.5" W X 17.0" L	21 LBS
	SIGN RIGID MOUNTED	7.5 S.F.	30.0" W X 36.0" L	14 LBS
	STREET NAME SIGN RIGID MOUNTED	16.0 S.F.	24.0" W X 96.0" L	36 LBS

NOTES

DESIGN REFERENCE MATERIAL


- Design the traffic signal structure and foundation in accordance with:
 - The 6th Edition 2013 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions.
 - The 2018 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to the specifications can be found in the traffic signal project special provisions.
 - The 2018 NCDOT Roadway Standard Drawings.
 - The traffic signal project plans and special provisions.
 - The NCDOT "Metal Pole Standards" located at the following NCDOT website: <https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>

DESIGN REQUIREMENTS

- Design the traffic signal structure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation.
- Design all signal supports using stress ratios that do not exceed 0.9.
- A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design requirements.
- Design base plate with 8 anchor bolt holes. Provide 2 inch x 60 inch anchor bolts.
- The mast arm attachment height (H1) shown is based on the following design assumptions:
 - Nominal vertical rise in mast arm is 5 feet as measured from the centerline of the arm base to the centerline of the free end of the arm.
 - Signal heads are rigidly mounted and vertically centered on the mast arm.
 - The roadway clearance height for design is as shown in the elevation views.
 - The top of the pole base plate is 0.75 feet above the ground elevation.
 - Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground level and the high point of the roadway.
 - Provide horizontal distance from the proposed centerline of the foundation to the edge of travelway. Refer to the Elevation Data Chart for elevation difference between the proposed foundation ground level and the edge of travelway. This information is necessary to ensure that the roadway clearance is maintained at the edge of the travelway and to aid in the camber design of the arm.
- The pole manufacturer will determine the total height (H2) of each pole using the greater of the following:
 - Mast arm attachment height (H1) plus 2 feet, or
 - H1 plus 1/2 of the total height of the mast arm attachment assembly plus 1 foot.
- If pole location adjustments are required, the contractor must gain approval from the Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the Signal Design Section Senior Structural Engineer for assistance at (919) 814-5000.
- The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signal heads over the roadway.
- The contractor is responsible for providing soil penetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.

All metal poles and arms should be black in color as specified in the project special provisions.


NCDOT Wind Zone 4 (90 mph)

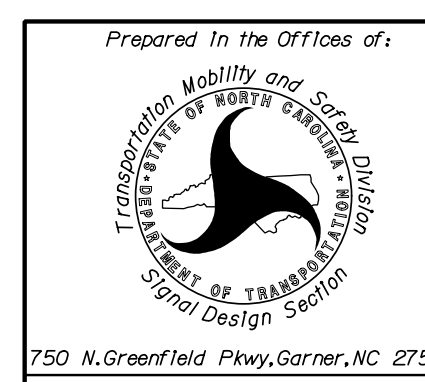

US 15-501
at
Charger Boulevard/
Mosaic Drive
Division 8 Chatham County Pittsboro
PLAN DATE: May 2022 REVIEWED BY: KP Baumann
PREPARED BY: SP Pennington REVIEWED BY:

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL
NORTH CAROLINA PROFESSIONAL ENGINEER
KEVIN P. BAUMANN
8/10/2022
DATE
SIG. INVENTORY NO. 08-0435

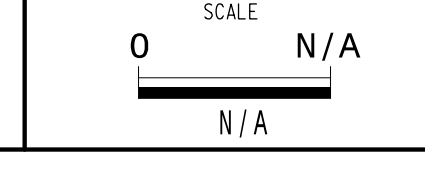


REVISIONS	INIT.	DATE

8/9/2022 6:15:50 PM susan.pennington ***K:timley-horn.com:SE-RALI:RALI:TPTD:510MALS:W012325040 Chatham - Northwoods Signal Phase 3x4 - Signal Design:080435-2022rpl1.dgn

NC Dept of Transportation
Division of Highways
Final Drawing Date: 08/23/2022
DocuSigned by:
Chang Bak
ITS & Signals Unit


PLANS PREPARED IN THE OFFICE OF:
Kimley-Horn
NC License #F-0102
421 Fayetteville Street, Suite 600
Raleigh, NC 27601
(919) 677-2000

Design Loading for METAL POLE NO. 3

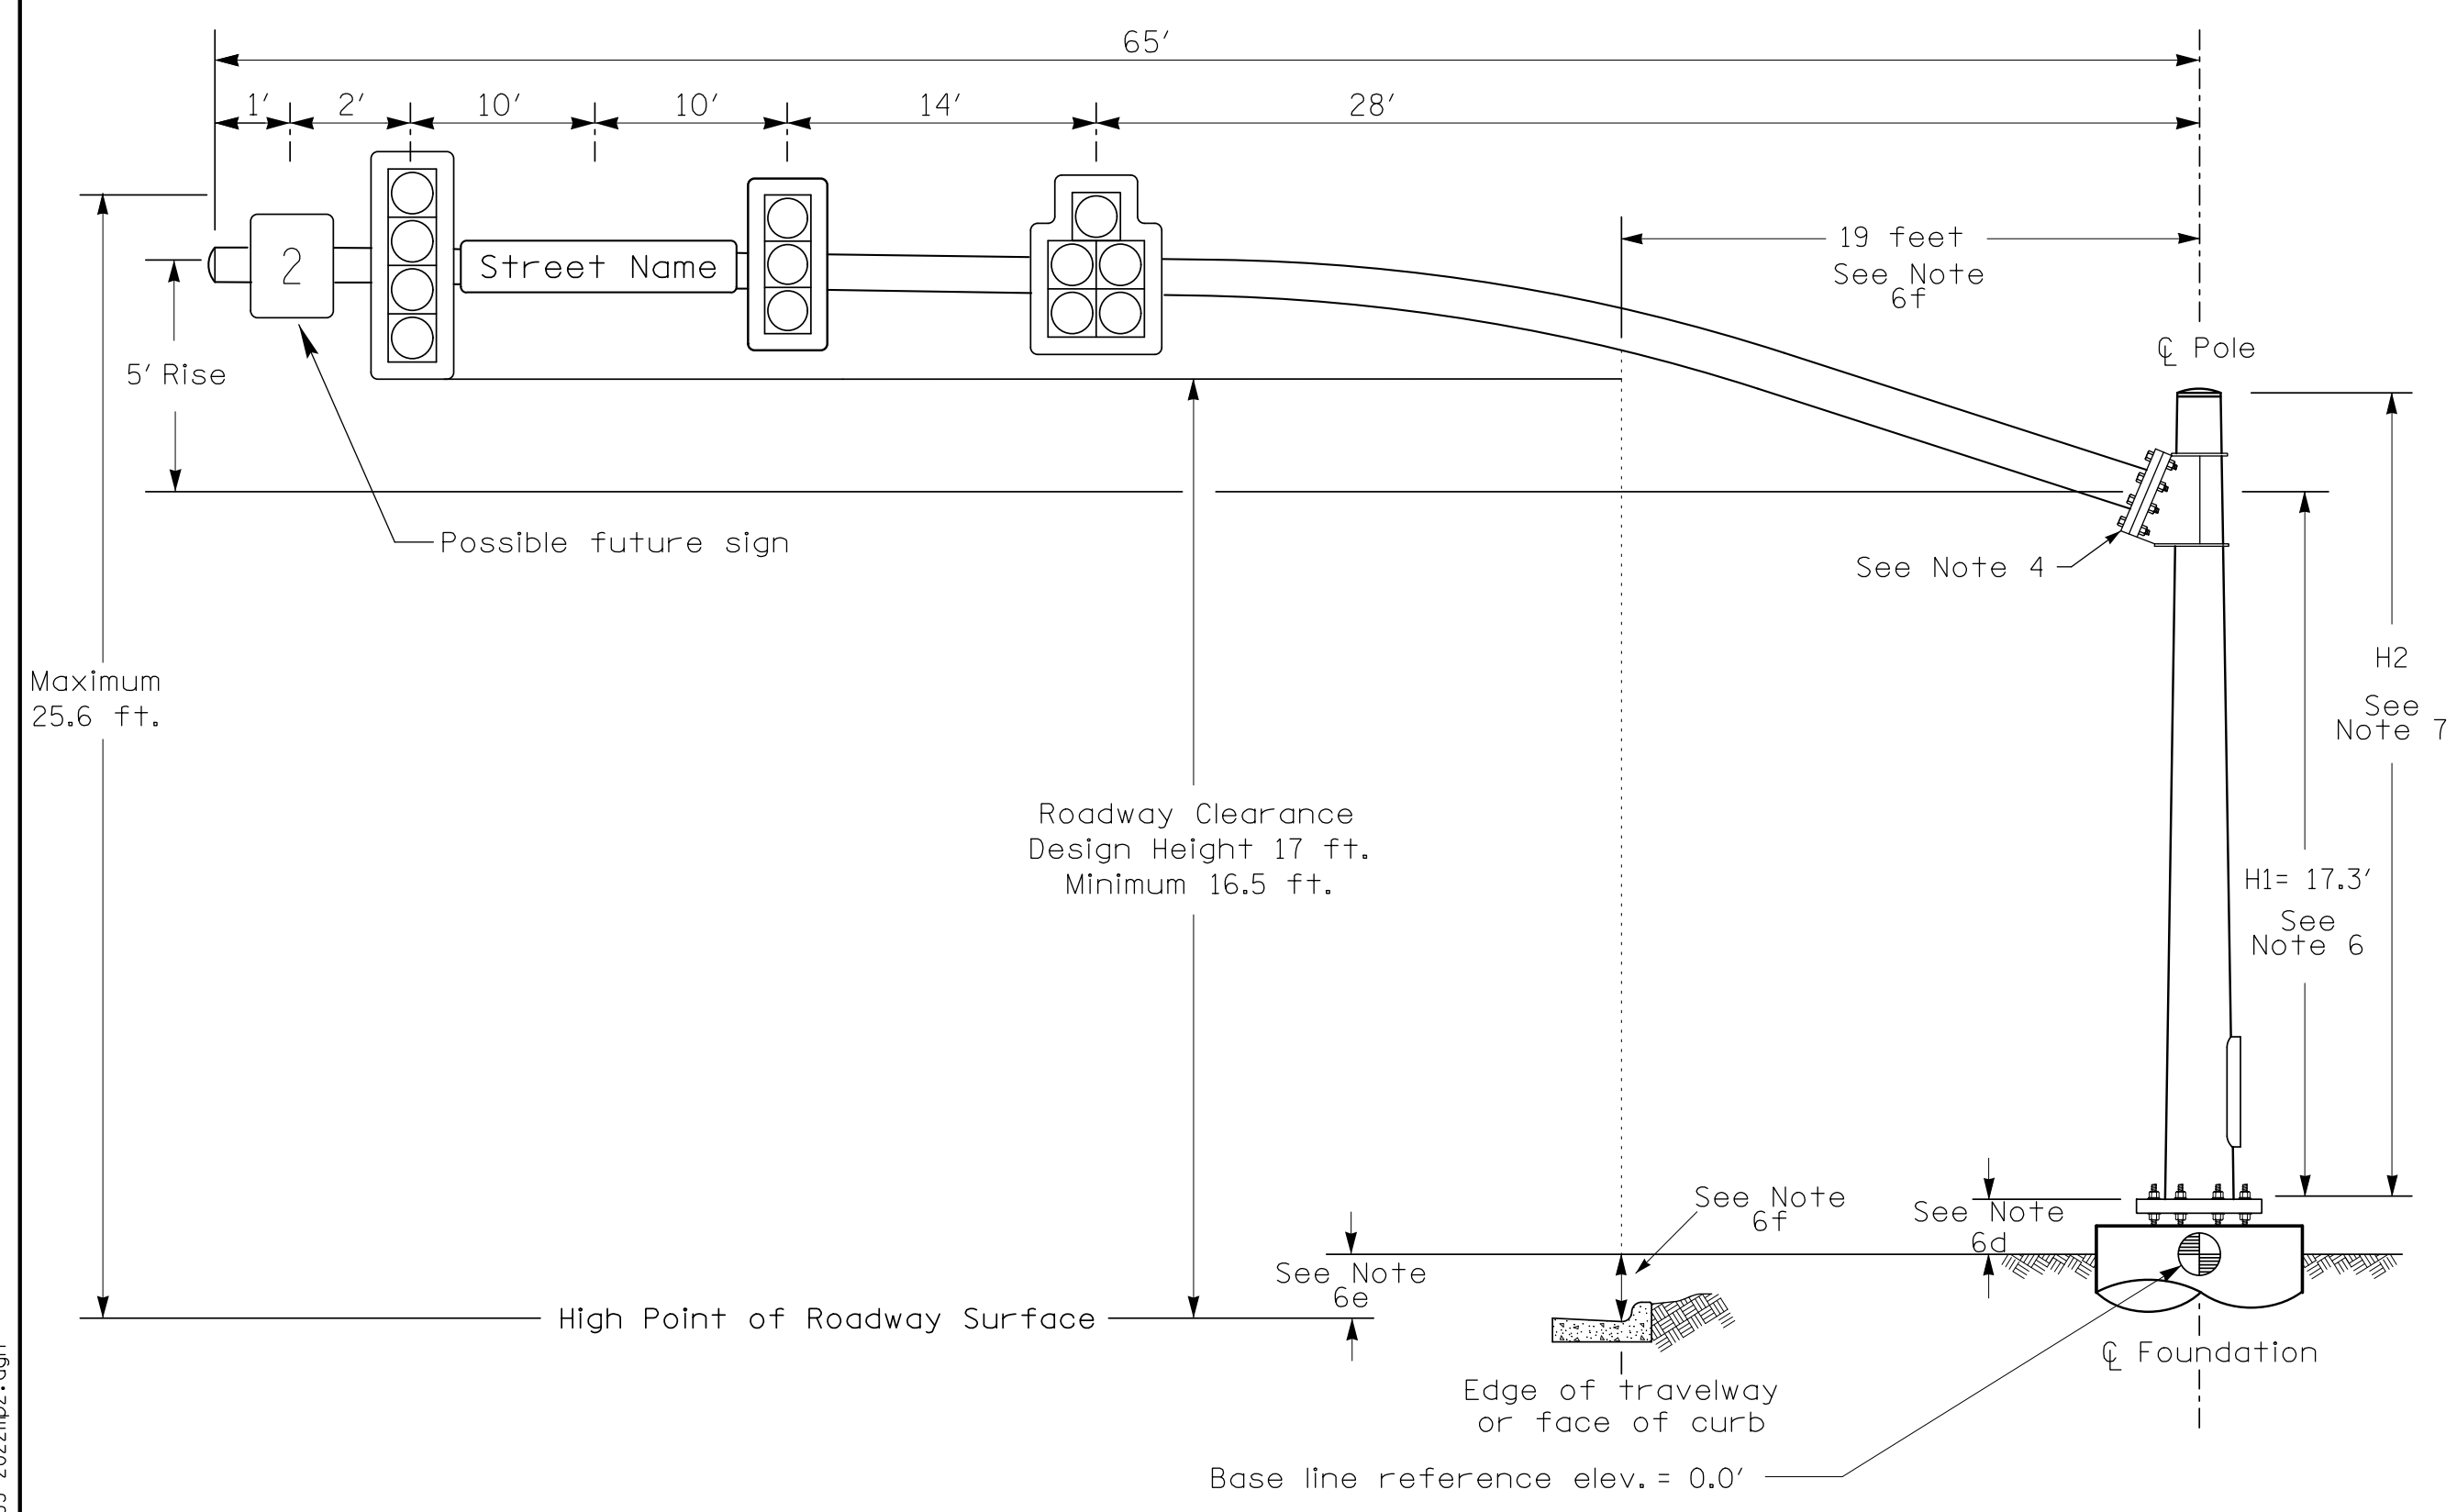

Elevation View

Design Loading for METAL POLE NO. 4

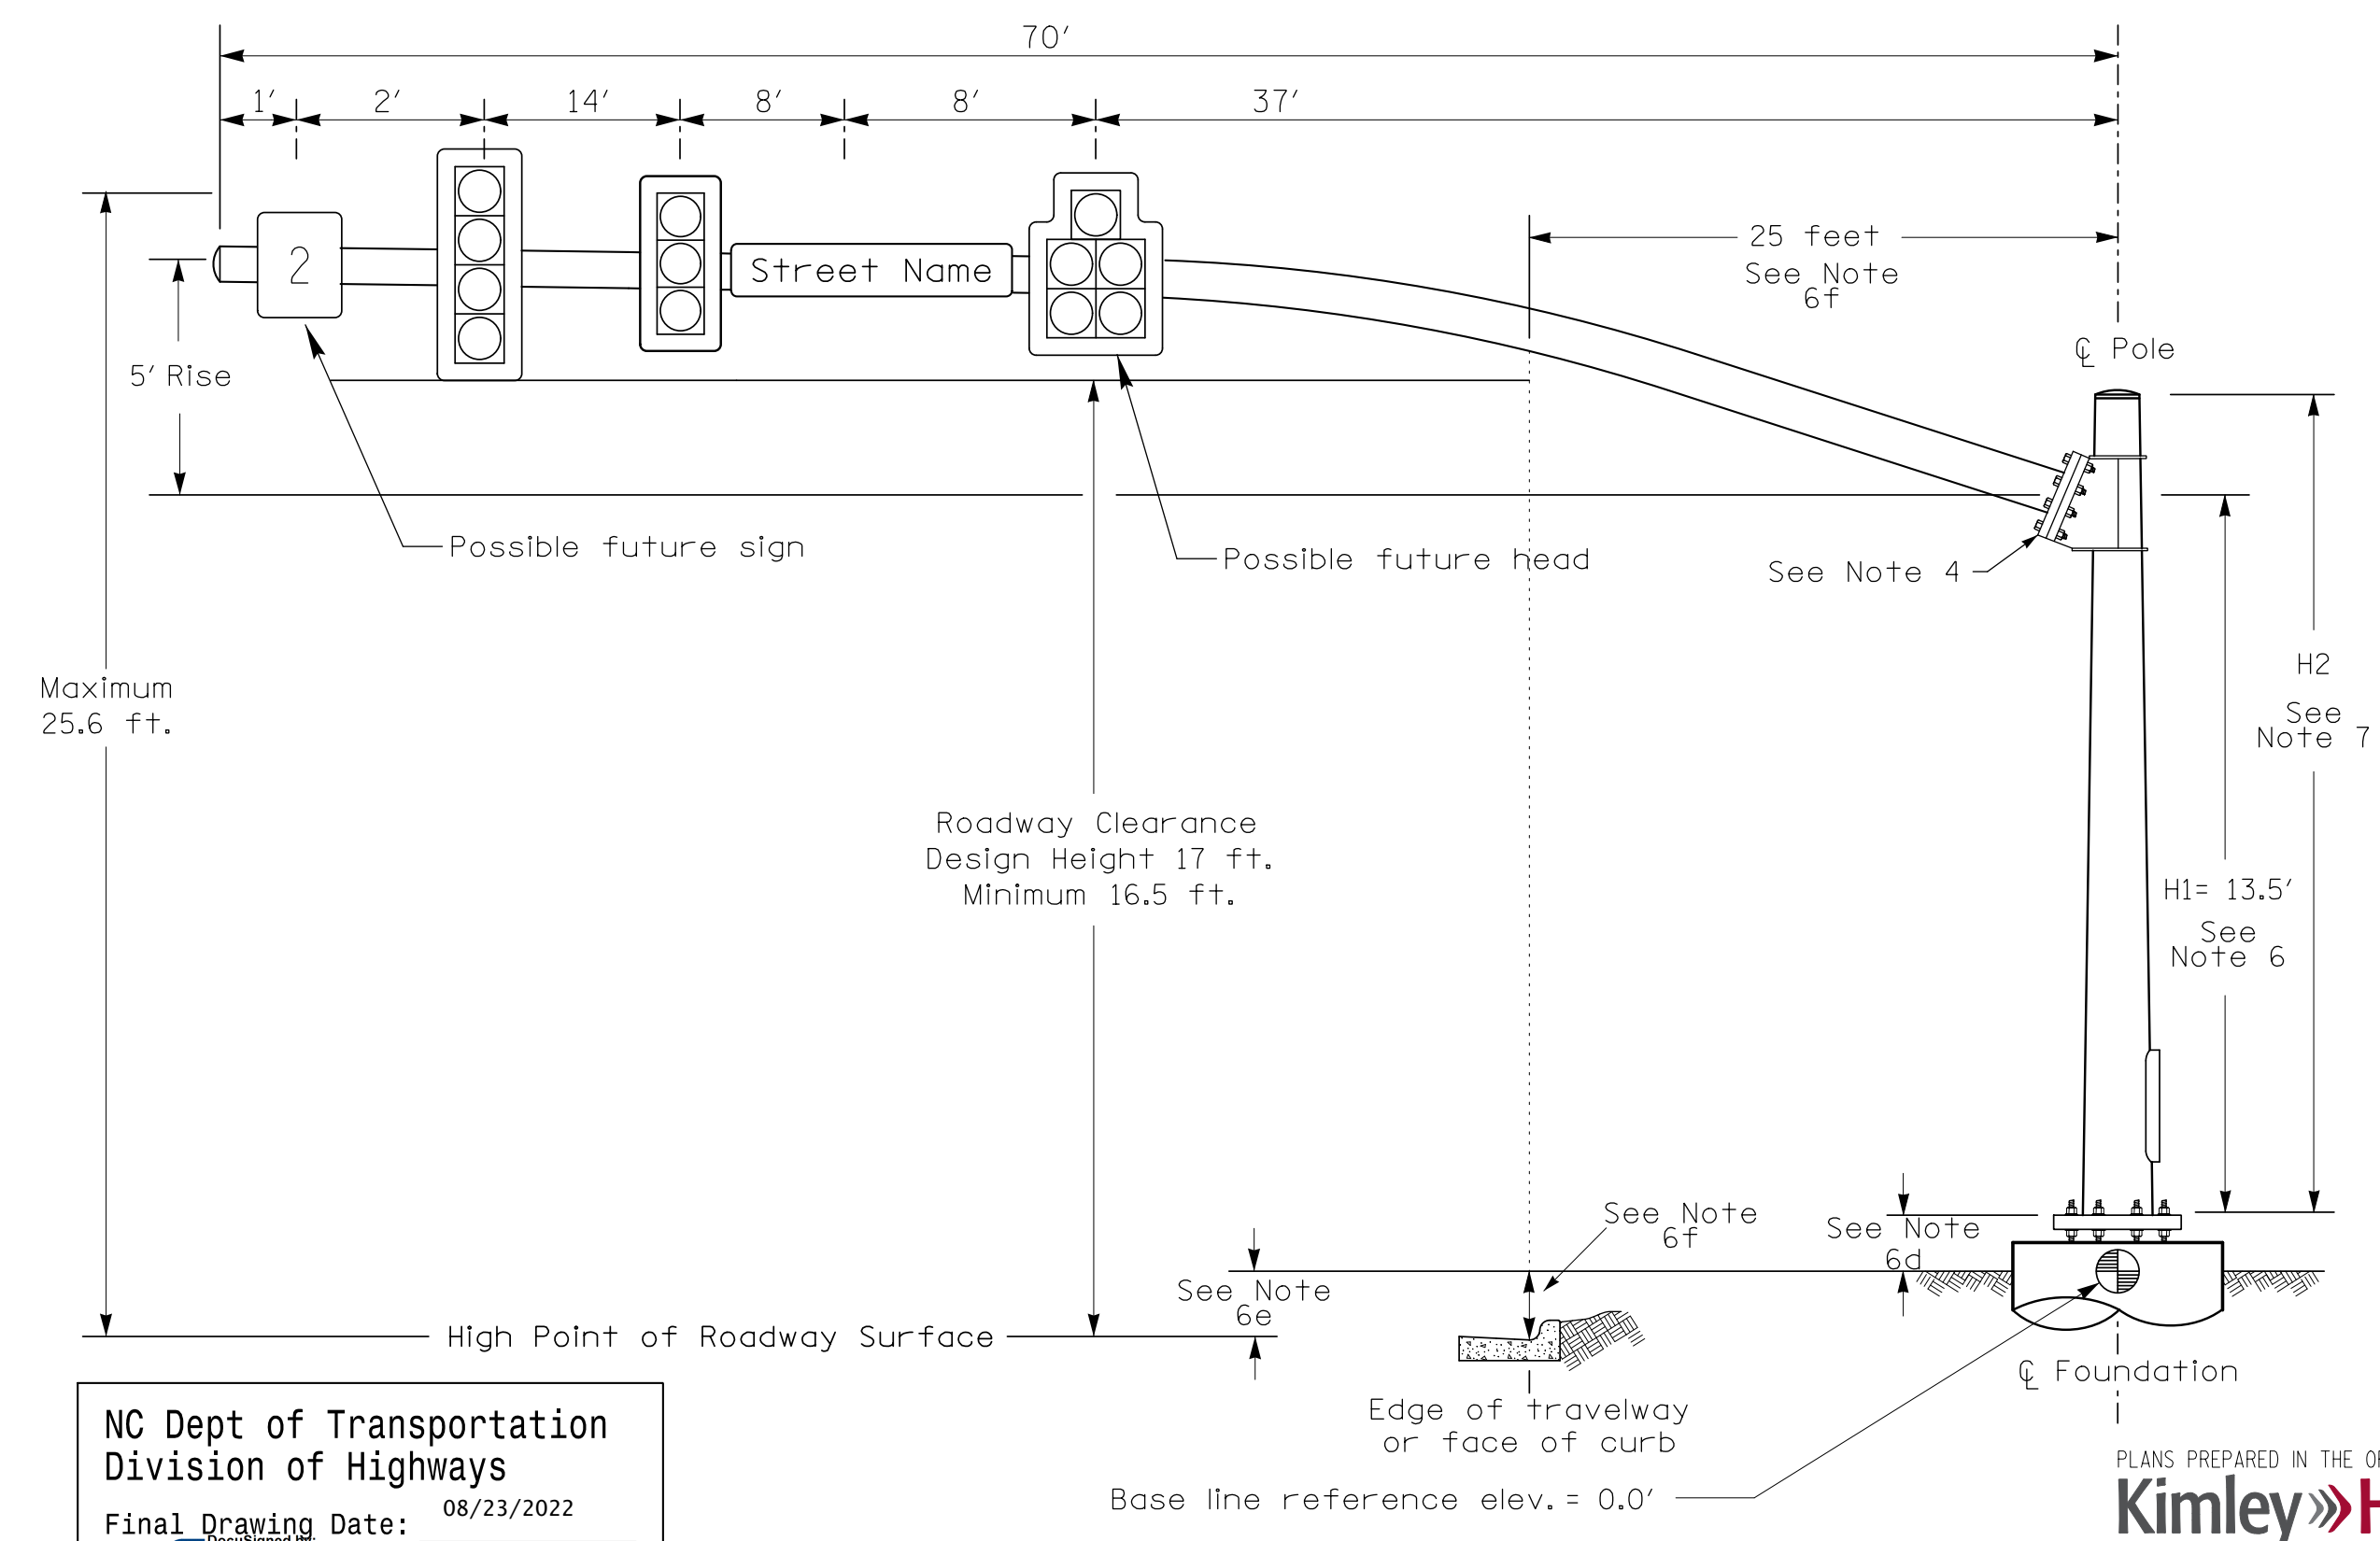


Elevation View


SPECIAL NOTE
 The contractor is responsible for verifying that the mast arm attachment height (H1) will provide the "Design Height" clearance from the roadway before submitting final shop drawings for approval. Verify elevation data below which was obtained by field measurement or from available project survey data.

Elevation Data for Mast Arm Attachment (H1)


Elevation Differences for:	Pole 3	Pole 4
Baseline reference point at Foundation @ ground level	0.0 ft.	0.0 ft.
Elevation difference at High point of roadway surface	+3.3 ft.	-0.5 ft.
Elevation difference at Edge of travelway or face of curb	+1.6 ft.	-0.4 ft.

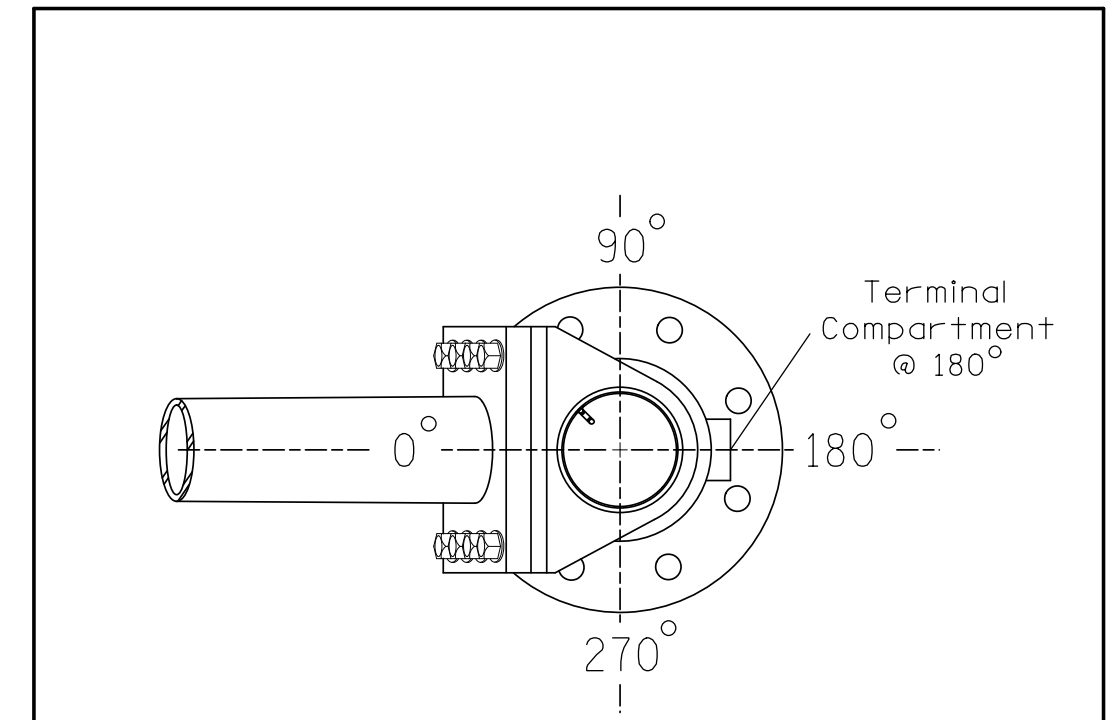

POLE RADIAL ORIENTATION

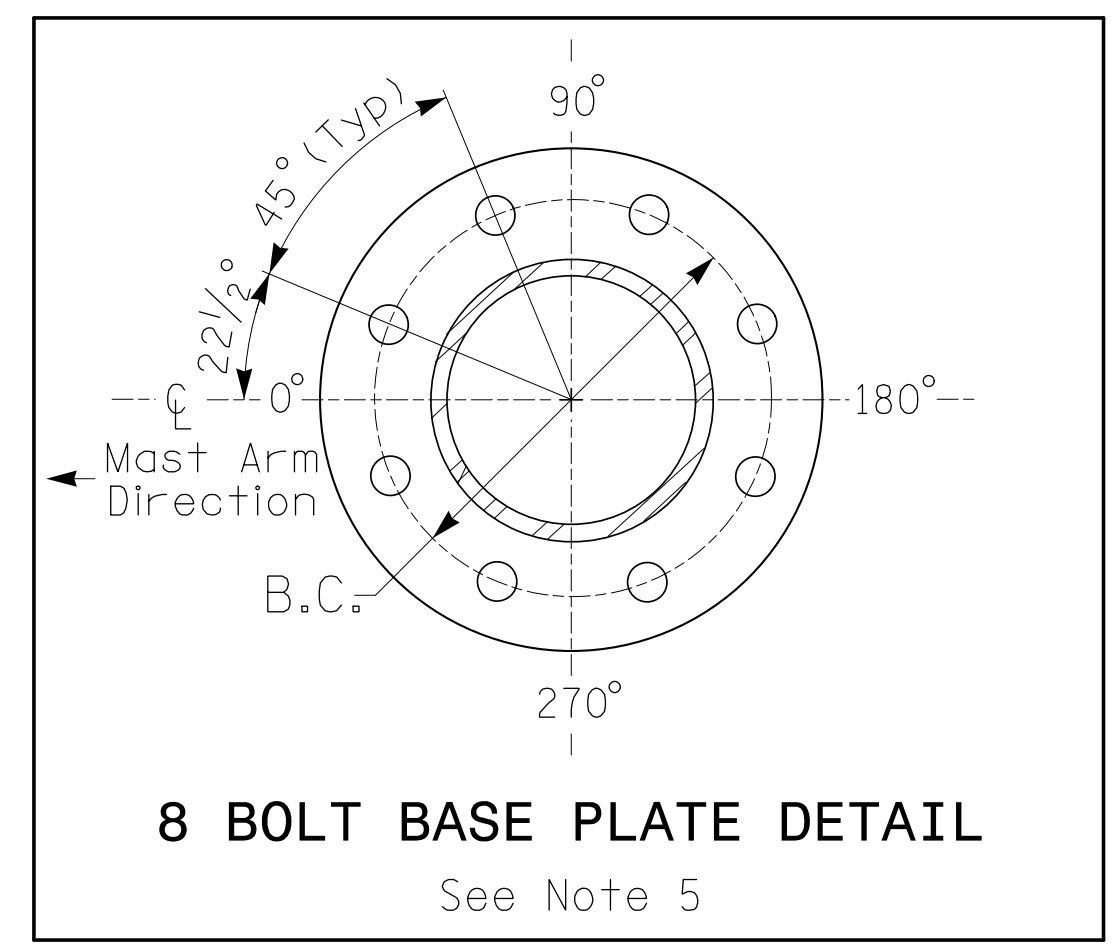

8 BOLT BASE PLATE DETAIL

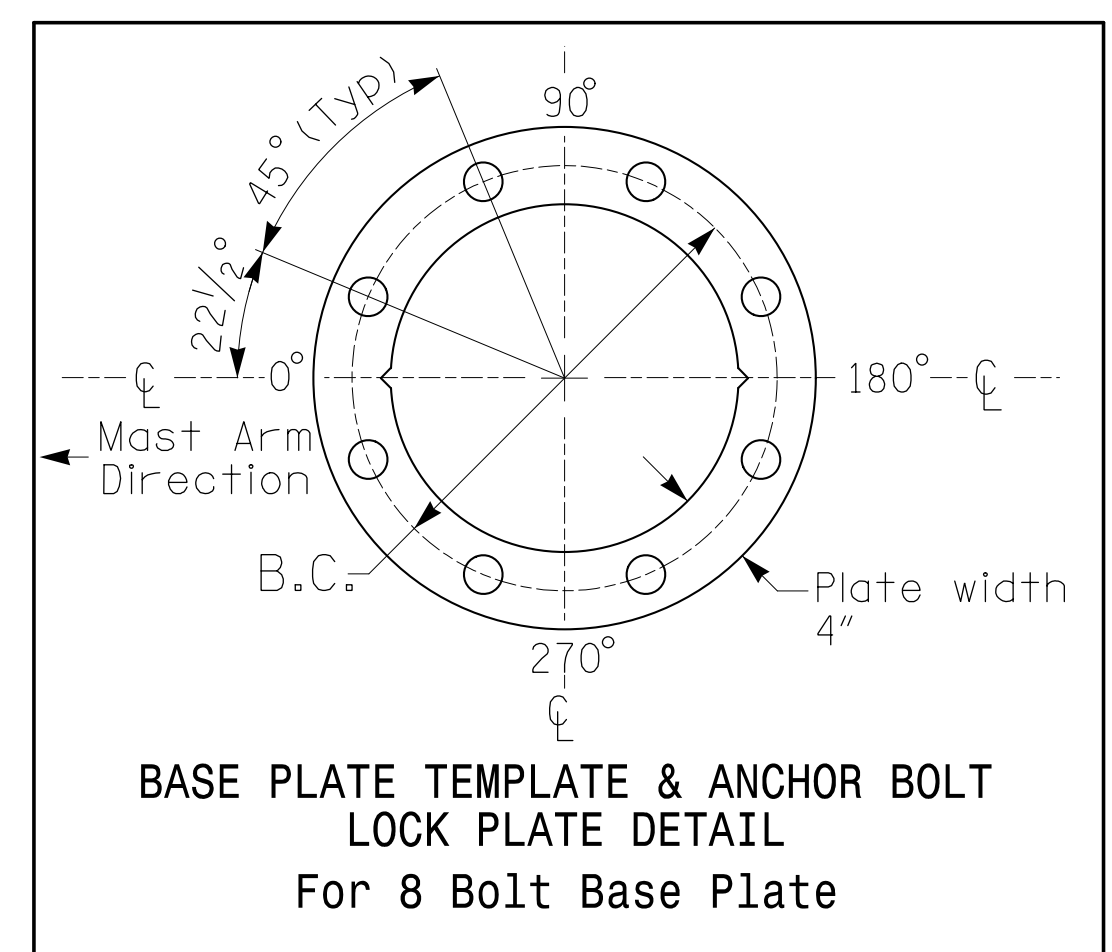

BASE PLATE TEMPLATE & ANCHOR BOLT LOCK PLATE DETAIL For 8 Bolt Base Plate

MAST ARM LOADING SCHEDULE

LOADING SYMBOL	DESCRIPTION	AREA	SIZE	WEIGHT
[Symbol]	RIGID MOUNTED SIGNAL HEAD 12"-5 SECTION-WITH BACKPLATE	16.3 S.F.	42.0" W X 56.0" L	103 LBS
[Symbol]	RIGID MOUNTED SIGNAL HEAD 12"-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5" W X 66.0" L	74 LBS
[Symbol]	RIGID MOUNTED SIGNAL HEAD 12"-3 SECTION-WITH BACKPLATE	9.3 S.F.	25.5" W X 52.5" L	60 LBS
[Symbol]	PEDESTRIAN SIGNAL HEAD WITH MOUNTING HARDWARE	2.2 S.F.	18.5" W X 17.0" L	21 LBS
[Symbol]	SIGN RIGID MOUNTED	7.5 S.F.	30.0" W X 36.0" L	14 LBS
[Symbol]	STREET NAME SIGN RIGID MOUNTED	16.0 S.F.	24.0" W X 96.0" L	36 LBS

NOTES

- DESIGN REFERENCE MATERIAL**
- Design the traffic signal structure and foundation in accordance with:
 - The 6th Edition 2013 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions.
 - The 2018 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to the specifications can be found in the traffic signal project special provisions.
 - The 2018 NCDOT Roadway Standard Drawings.
 - The traffic signal project plans and special provisions.
 - The NCDOT "Metal Pole Standards" located at the following NCDOT website: <https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>

- DESIGN REQUIREMENTS**
- Design the traffic signal structure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation.
 - Design all signal supports using stress ratios that do not exceed 0.9.
 - A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design requirements.
 - Design base plate with 8 anchor bolt holes. Provide 2 inch x 60 inch anchor bolts.
 - The mast arm attachment height (H1) shown is based on the following design assumptions:
 - Nominal vertical rise in mast arm is 5 feet as measured from the centerline of the arm base to the centerline of the free end of the arm.
 - Signal heads are rigidly mounted and vertically centered on the mast arm.
 - The roadway clearance height for design is as shown in the elevation views.
 - The top of the pole base plate is 0.75 feet above the ground elevation.
 - Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground level and the high point of the roadway.
 - Provide horizontal distance from the proposed centerline of the foundation to the edge of travelway. Refer to the Elevation Data Chart for elevation difference between the proposed foundation ground level and the edge of travelway. This information is necessary to ensure that the roadway clearance is maintained at the edge of the travelway and to aid in the camber design of the arm.
 - The pole manufacturer will determine the total height (H2) of each pole using the greater of the following:
 - Mast arm attachment height (H1) plus 2 feet, or
 - H1 plus 1/2 of the total height of the mast arm attachment assembly plus 1 foot.
 - If pole location adjustments are required, the contractor must gain approval from the Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the Signal Design Section Senior Structural Engineer for assistance at (919) 814-5000.
 - The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signal heads over the roadway.
 - The contractor is responsible for providing soil penetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.

All metal poles and arms should be black in color as specified in the project special provisions.

NCDOT Wind Zone 4 (90 mph)

Prepared in the Office of: **Transportation Mobility and Safety Division**

US 15-501 at Charger Boulevard/ Mosaic Drive

Division 8 Chatham County Pittsboro

PLAN DATE: May 2022 REVIEWED BY: KP Baumann

PREPARED BY: SP Pennington REVIEWED BY:

SCALE: 0 N/A

REVISIONS: [Table with columns for REVISIONS, INIT., DATE]

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL: NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 044434

8/10/2022

SIG. INVENTORY NO. 08-0435

8/9/2022 6:15:52 PM susan.pennington ***K:timley-horn.com**E:RALI.MRALL.TPT@SIGNALS.M012325040 Chatham - Northwoods Signal@Phase 3K54 - Signal Design080435-2022mp2.dgn


NC Dept of Transportation
 Division of Highways
 Final Drawing Date: 08/23/2022
 Designated By: **Chang Baik**
 ITS & Signals Unit

PLANS PREPARED IN THE OFFICE OF:
Kimley»Horn
 NC License #F-0102
 421 Fayetteville Street, Suite 600
 Raleigh, NC 27601
 (919) 677-2000

EDI MODEL 2010ECL-NC CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

REMOVE DIODE JUMPERS 1-5, 1-6, 1-9, 1-10, 1-12, 1-15, 2-5, 2-6, 2-9, 2-11, 2-12, 2-13, 2-15, 3-7, 3-8, 3-9, 3-10, 3-11, 3-16, 4-7, 4-8, 4-9, 4-10, 4-12, 4-14, 4-16, 5-10, 5-11, 5-12, 5-13, 6-9, 6-10, 6-11, 6-13, 6-15, 7-9, 7-11, 7-12, 7-14, 8-10, 8-11, 8-12, 8-14, 8-16, 9-10, 9-11, 9-12, 9-13, 9-14, 9-15, 10-11, 10-12, 10-14, 10-15, 10-16, 11-12, 11-13, 11-15, 11-16, 12-13, 12-14, 12-16, 13-15, and 14-16.

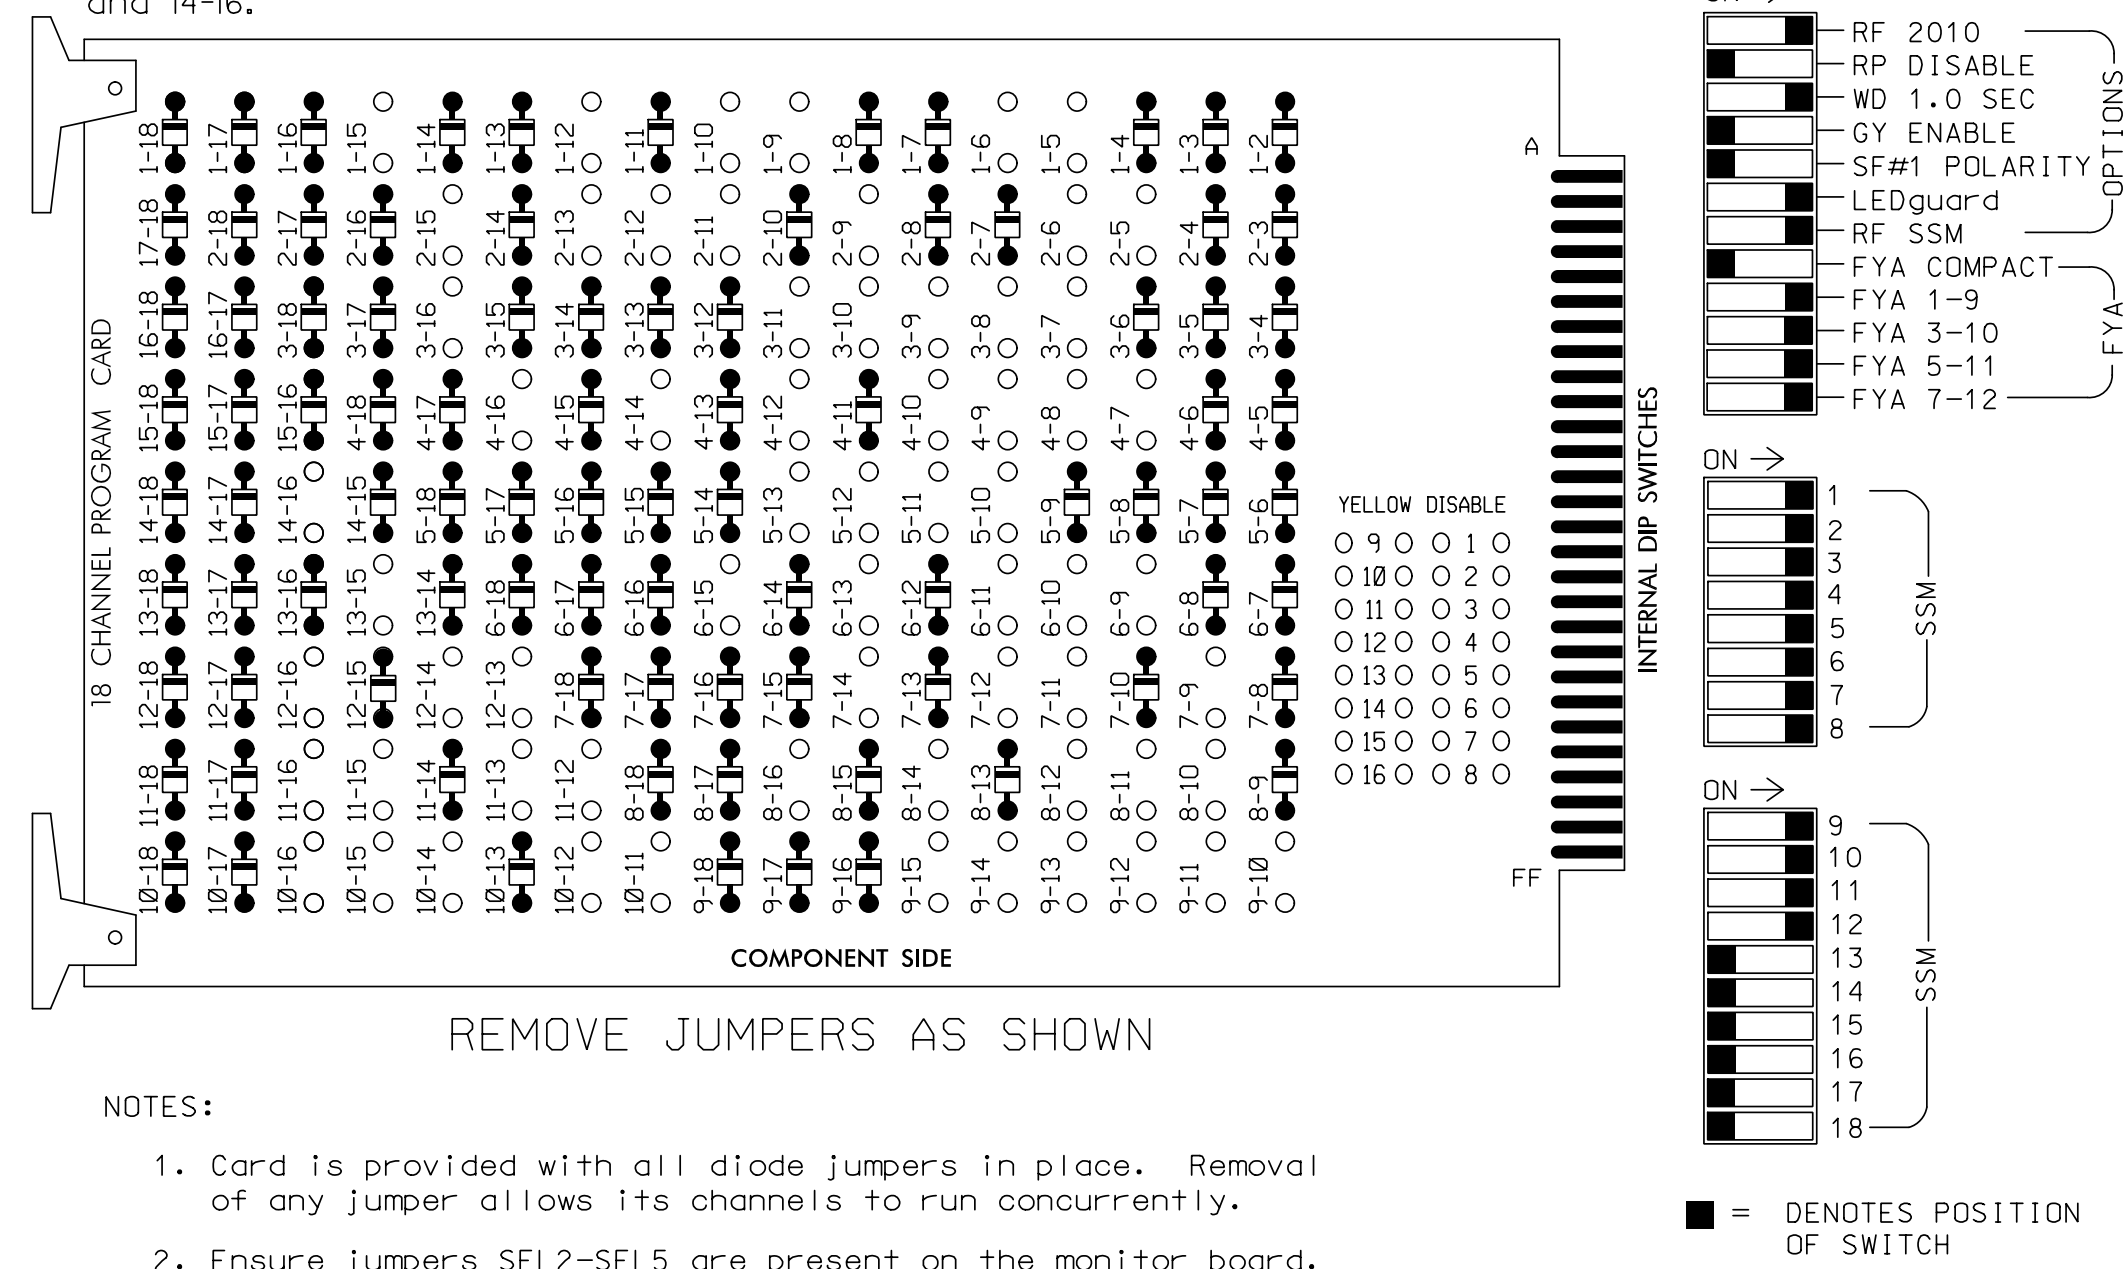

REMOVE JUMPERS AS SHOWN

- NOTES:
- Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
 - Ensure jumpers SEL2-SEL5 are present on the monitor board.

NOTES

- To prevent "flash-conflict" problems, insert red flash program blocks for all unused vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the Signal Plans.
- Ensure that Red Enable is active at all times during normal operation.
- Enable Simultaneous Gap-Out for all Phases.
- Program phases 2 and 6 for Variable Initial and Gap Reduction.
- Program phases 2 and 6 for Startup In Green.
- Program phases 2 and 6 for Startup Ped Call.
- Program phases 2 and 6 for Yellow Flash, and overlaps 1 and 2 as Wag Overlaps.
- The cabinet and controller are part of the Signal System#: D08 25-PITTSBORO

EQUIPMENT INFORMATION

CONTROLLER.....2070
 CABINET.....332 W/ AUX
 SOFTWARE.....ECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...18 WITH AUX. OUTPUT FILE
 LOAD SWITCHES USED.....S1,S2,S2P,S3,S4,S4P,S5,S6,S6P,
 S7,S8,S8P,S9,S10,S12,S13
 PHASES USED.....1,2,2PED,3,4,4PED,5,6,6PED,7,
 8,8PED
 OVERLAP "A".....6+7
 OVERLAP "B".....1+8
 OVERLAP "C".....2+3
 OVERLAP "D".....4+5

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S2P	S3	S4	S4P	S5	S6	S6P	S7	S8	S8P	S9	S10	S11	S12	S13	S14
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OLA	OLB	SPARE	OLC	OLD	SPARE
SIGNAL HEAD NO.	11	21,22	P21, P22	31,32	41,42	P41, P42	51,52	61,62	P61, P62	71,72	81,82	P81, P82	63	83	NU	23	43	NU
RED	128			101			134			107			A121	A124		A114	A101	
YELLOW	129			102			135			108								
GREEN	130			103			136			109								
RED ARROW	125			116			131			122								
YELLOW ARROW	126			117			132			123			A122	A125		A115	A102	
FLASHING YELLOW ARROW													A123	A126		A116	A103	
GREEN ARROW	127			118			133			124								
Hand				113			104			119			110					
Walking				115			106			121			112					

NU = Not Used
 ★ See pictorial of head wiring in detail this sheet.

INPUT FILE POSITION LAYOUT

(front view)


FILE	1	2	3	4	5	6	7	8	9	10	11	12	13	14
U	∅ 1	∅ 2/SYS	S	S	∅ 3	∅ 3	∅ 4	S	∅ 1	S	S	∅ 2 PED	∅ 6 PED	FS
I	1A	2A/S5	T	T	3A	3B	4A	T	1B	T	T	DC ISOLATOR	DC ISOLATOR	DC ISOLATOR
L	NOT USED	∅ 2/SYS	Y	Y	NOT USED	NOT USED	NOT USED	Y	NOT USED	Y	Y	∅ 4 PED	∅ 8 PED	ST
		2B/S6	Y	Y				Y		Y	Y	DC ISOLATOR	DC ISOLATOR	DC ISOLATOR
U	∅ 5	∅ 5	∅ 6/SYS	S	∅ 7	∅ 8	S	∅ 5	S	S	S	S	S	S
I	5A	5B	6A/S13	T	7A	8A	T	5C	T	T	T	T	T	T
L	NOT USED	NOT USED	∅ 6/SYS	Y	NOT USED	NOT USED	Y	∅ 7	Y	Y	Y	Y	Y	Y
			6B/S14	Y			Y		Y	Y	Y	Y	Y	Y

EX.: 1A, 2A, ETC. = LOOP NO.'S
 FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART


LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
1A	TB2-1,2	I1U	56	18	1	1	Y	Y			
1B	TB6-9,10	I9U	60	22	11	1	Y	Y			15
2A/S5	TB2-5,6	I2U	39	1	2	2	Y	Y			
2B/S6	TB2-7,8	I2L	43	5	12	2	Y	Y			
3A	TB4-5,6	I5U	58	20	3	3	Y	Y			
3B	TB4-9,10	I6U	41	3	4	3	Y	Y			
4A	TB6-1,2	I7U	65	27	34	4	Y	Y			
5A	TB3-1,2	J1U	55	17	5	5	Y	Y			
5B	TB3-5,6	J2U	40	2	6	5	Y	Y			
5C	TB7-9,10	J9U	59	21	15	5	Y	Y			15
6A/S13	TB3-9,10	J3U	64	26	36	6	Y	Y			
6B/S14	TB3-11,12	J3L	77	39	46	6	Y	Y			
7A	TB5-5,6	J5U	57	19	7	7	Y	Y			
7B	TB7-11,12	J9L	61	23	17	7	Y	Y			
8A	TB5-9,10	J6U	42	4	8	8	Y	Y			
PED PUSH BUTTONS											
P21,P22	TB8-4,6	I12U	67	29	PED 2	2	PED				
P41,P42	TB8-5,6	I12L	69	31	PED 4	4	PED				
P61,P62	TB8-7,9	I13U	68	30	PED 6	6	PED				
P81,P82	TB8-8,9	I13L	70	32	PED 8	8	PED				

NOTE:
 INSTALL DC ISOLATORS IN INPUT FILE SLOTS I12 AND I13.

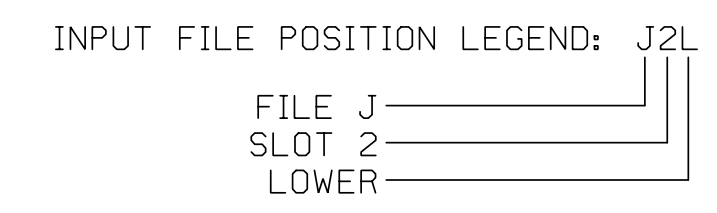

FYA SIGNAL WIRING DETAIL

(wire signal heads as shown)

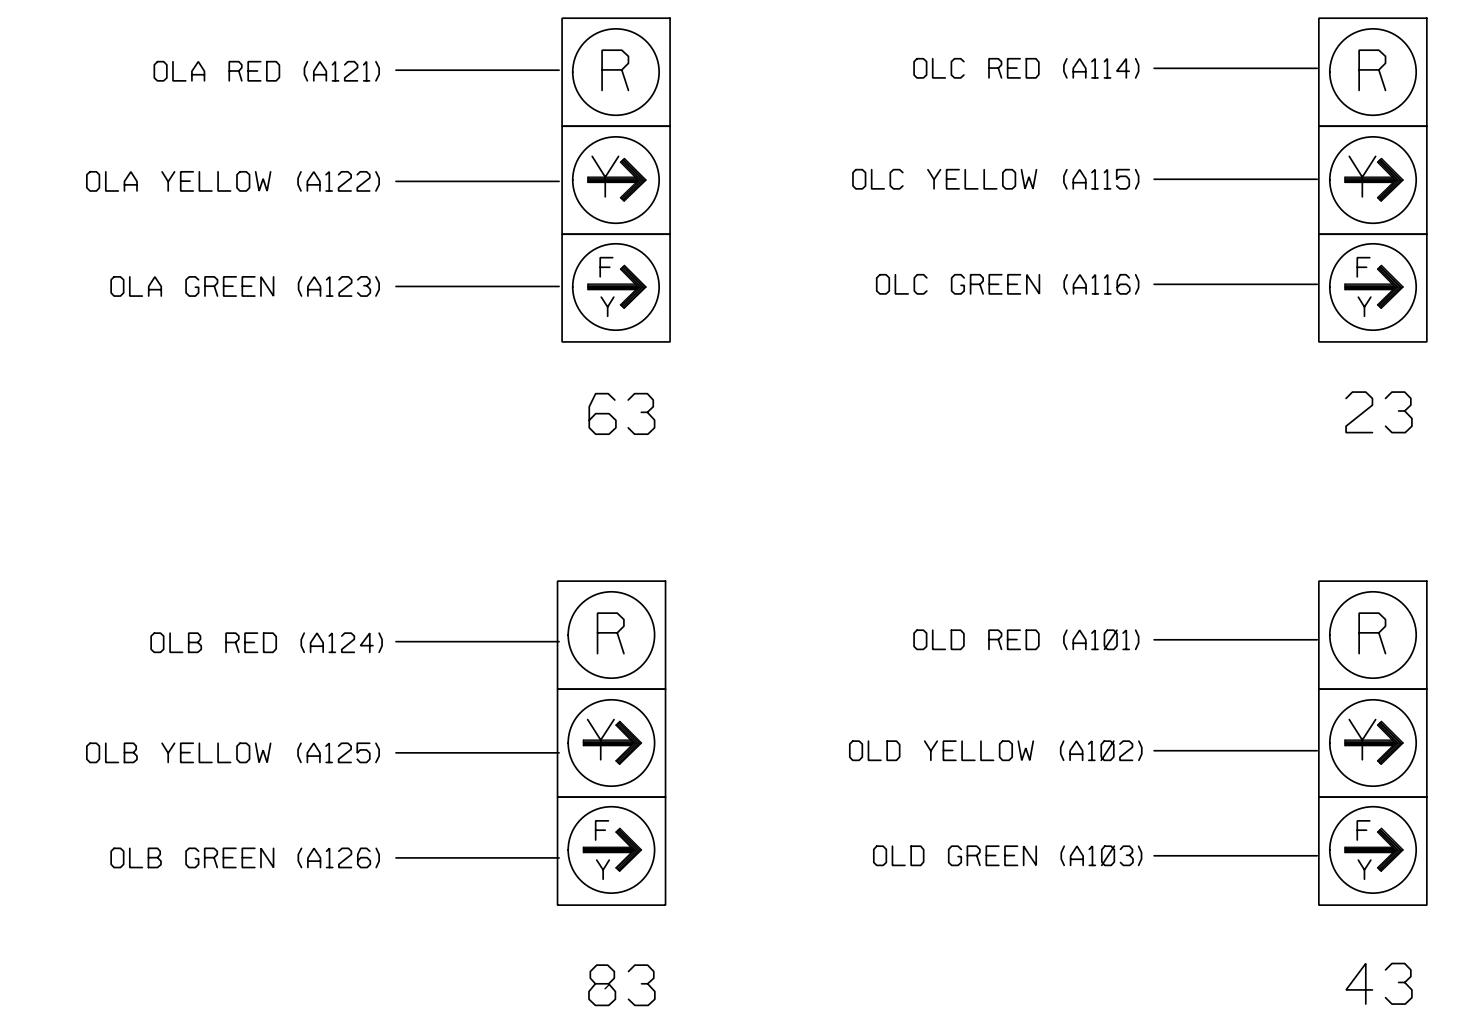

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 08-0436
 DESIGNED: May 2022
 SEALED: 8/10/2022
 REVISED: N/A

COUNTDOWN PEDESTRIAN SIGNAL OPERATION

Countdown Ped Signals are required to display timing only during Ped Clearance Interval. Consult Ped Signal Module user's manual for instructions on selecting this feature.

NC Dept of Transportation
 Division of Highways
 Final Drawing Date: 8/23/2022
 Designed by: *Chang Eak*
 ITS & Signals Unit

PLANS PREPARED IN THE OFFICE OF:
Kimley-Horn
 NC License #F-0102
 421 Fayetteville Street, Suite 600
 Raleigh, NC 27601
 (919) 677-2000

Electrical Detail Sheet 1 of 2

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL
 NORTH CAROLINA PROFESSIONAL ENGINEERS
 SEAL 044434
 KEVIN P. BAUMANN

US 15-501 at SR 1599 (Northwood School Rd.) / SR 1658 (Russet Run Rd.)
 Division 8 Chatham County Pittsboro
 PLAN DATE: May 2022 REVIEWED BY: KP Baumann
 PREPARED BY: SP Pennington REVIEWED BY:
 REVISIONS INIT. DATE

8/9/2022 6:15:36 PM susan.pennington

8/9/2022 8/10/2022
 SIG. INVENTORY NO. 08-0436

FLASHER CIRCUIT MODIFICATION DETAIL

IN ORDER TO INSURE THAT SIGNALS FLASH CONCURRENTLY ON THE SAME APPROACH, MAKE THE FOLLOWING FLASHER CIRCUIT CHANGES:

1. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-4 AND TERMINATE ON T2-2.
2. ON REAR OF PDA - REMOVE WIRE FROM TERM. T2-5 AND TERMINATE ON T2-3.
3. REMOVE FLASHER UNIT 2.

THE CHANGES LISTED ABOVE TIES ALL PHASES AND OVERLAPS TO FLASHER UNIT 1.

OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

FROM MAIN MENU PRESS '8' (OVERLAPS), THEN '1' (VEHICLE OVERLAP SETTINGS).

```

PAGE 1: VEHICLE OVERLAP 'A' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: | XX
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | - RED - YELLOW - GREEN
FLASH COLORS:   | - RED - YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0
  
```

← NOTICE GREEN FLASH

PRESS '+'

```

PAGE 1: VEHICLE OVERLAP 'B' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: | X X
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | - RED - YELLOW - GREEN
FLASH COLORS:   | - RED - YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...N
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0
  
```

← NOTICE GREEN FLASH

PRESS '+'

```

PAGE 1: VEHICLE OVERLAP 'C' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: | XX
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | - RED - YELLOW - GREEN
FLASH COLORS:   | - RED - YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0
  
```

← NOTICE GREEN FLASH

PRESS '+'

```

PAGE 1: VEHICLE OVERLAP 'D' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: | XX
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | - RED - YELLOW - GREEN
FLASH COLORS:   | - RED - YELLOW X GREEN
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...N
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)...0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)...0
  
```

← NOTICE GREEN FLASH

OVERLAP PROGRAMMING COMPLETE


8/9/2022 6:15:58 PM susan.pennington K:\RAL_TPTD\SIGNALS\012325\040 Chatham - Northwoods Signal\Phase 3\654 - Signal Design\080136-2022\2.dgn

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 08-0436
 DESIGNED: May 2022
 SEALED: 8/10/2022
 REVISED: N/A

NC Dept of Transportation
 Division of Highways
 Final Drawing Date: 8/23/2022
 Drawn by: *Cheng Gao*
 ITS & Signals Unit

Electrical Detail Sheet 2 of 2

PLANS PREPARED IN THE OFFICE OF:
Kimley-Horn
 NC License #F-0102
 421 Fayetteville Street, Suite 600
 Raleigh, NC 27601
 (919) 677-2000

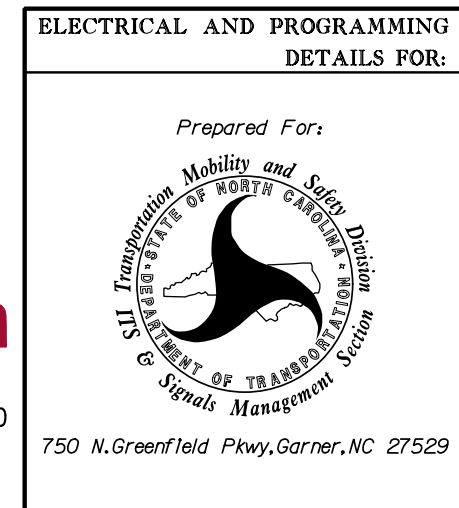

ELECTRICAL AND PROGRAMMING DETAILS FOR:		US 15-501	
Prepared For:		at	
SR 1599 (Northwood School Rd.)		/ SR 1658 (Russet Run Rd.)	
Division 8	Chatham County	Pittsboro	
PLAN DATE: May 2022	REVIEWED BY: KP Baumann		
PREPARED BY: SP Pennington	REVIEWED BY:		
REVISIONS	INIT.	DATE	

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL

STATE OF NORTH CAROLINA
 PROFESSIONAL ENGINEER
 SEAL 044434
 KEVIN P. BAUMANN

DocuSigned by: *Kevin P. Baumann* 8/10/2022

SIG. INVENTORY NO. 08-0436

PHASING DIAGRAM


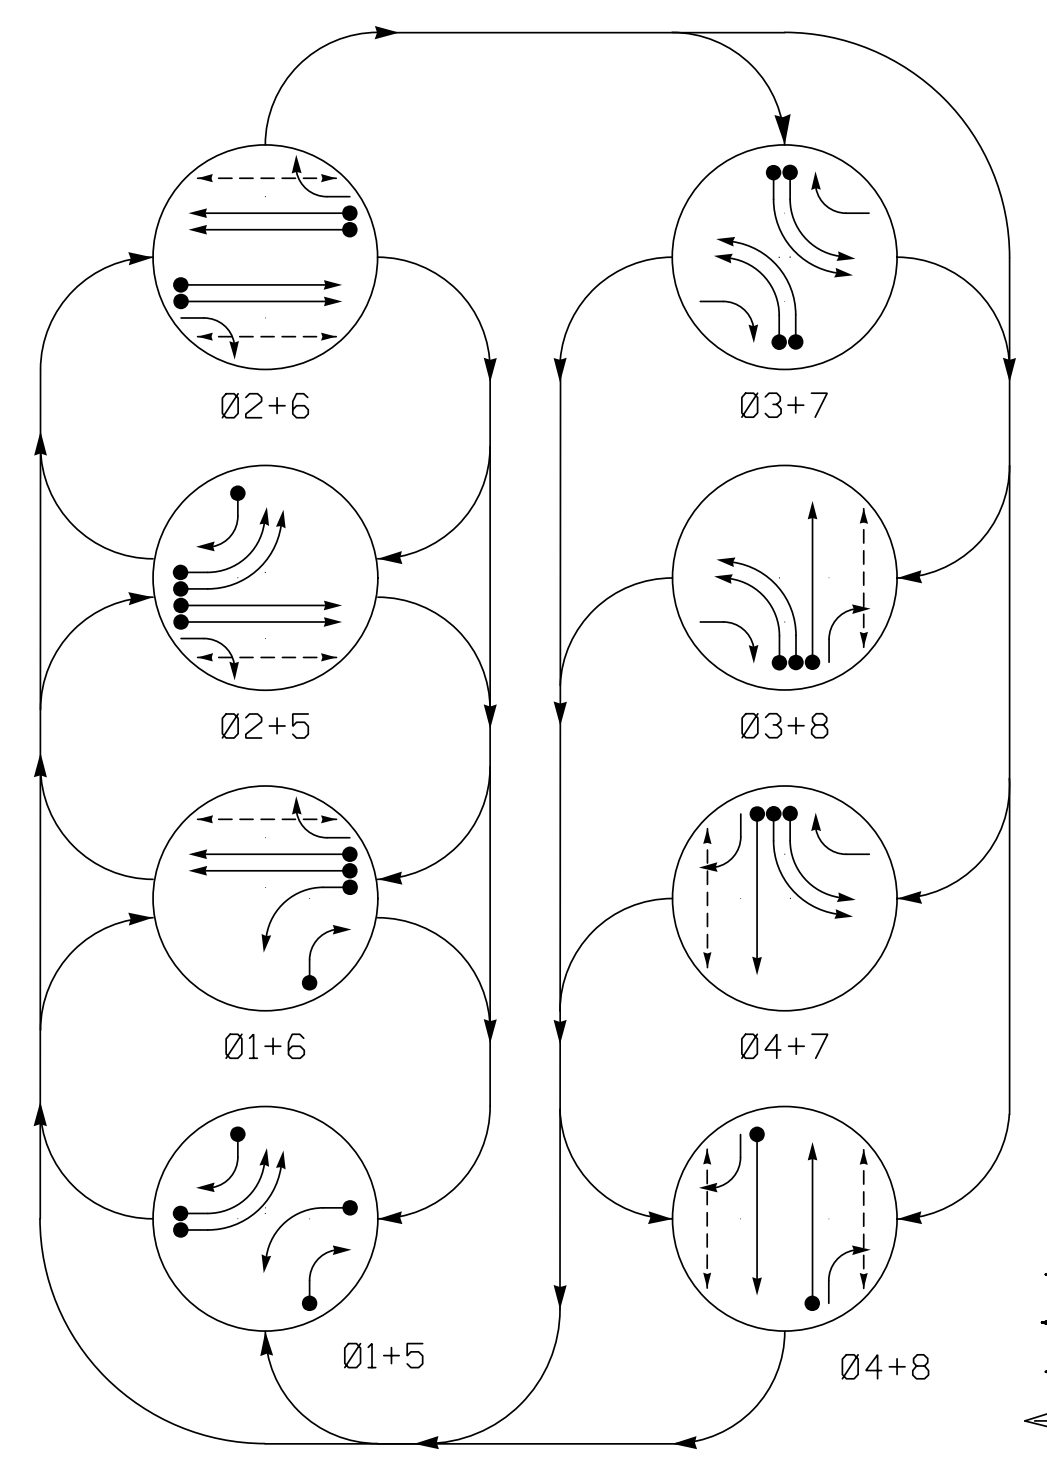


TABLE OF OPERATION

SIGNAL FACE	PHASE								FLASH
	Ø 1+5	Ø 2+6	Ø 3+7	Ø 4+8	Ø 1+6	Ø 2+5	Ø 3+8	Ø 4+7	
11	←	←	←	←	←	←	←	←	←
21, 22	R	R	G	G	R	R	R	R	Y
23	R	R	F	F	F	F	R	R	Y
31, 32	←	←	←	←	←	←	←	←	←
41, 42	R	R	R	R	R	R	G	G	R
43	F	F	R	R	R	R	F	F	R
51, 52	←	←	←	←	←	←	←	←	←
61, 62	R	G	R	G	R	R	R	R	Y
63	R	F	R	F	R	F	R	Y	←
71, 72	←	←	←	←	←	←	←	←	←
81, 82	R	R	R	R	G	R	G	R	←
83	F	F	R	R	R	R	F	F	R
P21, P22	DW	DW	W	W	DW	DW	DW	DRK	
P41, P42	DW	DW	DW	DW	DW	W	W	DRK	
P61, P62	DW	W	DW	W	DW	DW	DW	DRK	
P81, P82	DW	DW	DW	DW	W	DW	W	DRK	

SIGNAL FACE I.D.

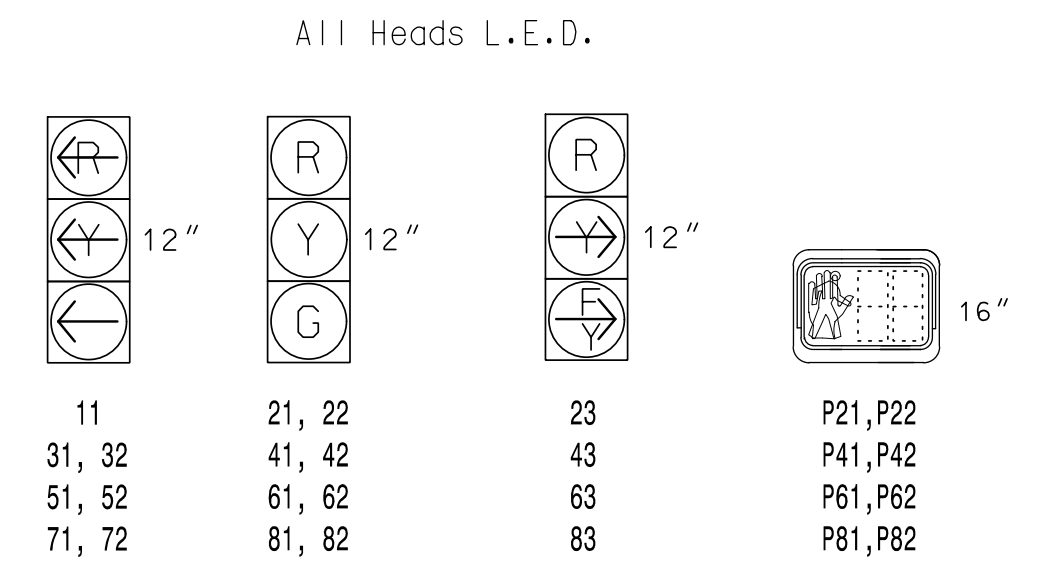

OASIS 2070 LOOP & DETECTOR INSTALLATION CHART


LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	DETECTOR PROGRAMMING						
					PHASE	CALLING	EXTENSION	FULL TIME DELAY	STRETCH TIME	DELAY TIME	SYSTEM LOOP NEW CARD
1A	6X40	+5	2-4-2	-	1	Y	Y	-	-	-	-
1B	6X40	+5	2-4-2	-	1	Y	Y	-	-	15	-
2A/S5	6X6	420	EXIST	-	2	Y	Y	-	-	-	-
2B/S6	6X6	420	EXIST	-	2	Y	Y	-	-	-	Y
3A	6X40	+5	2-4-2	-	3	Y	Y	-	-	-	-
3B	6X40	+5	2-4-2	-	3	Y	Y	-	-	-	-
4A	6X40	+5	2-4-2	-	4	Y	Y	-	-	-	-
5A	6X40	+5	2-4-2	-	5	Y	Y	-	-	-	-
5B	6X40	+5	2-4-2	-	5	Y	Y	-	-	-	-
5C	6X40	+5	2-4-2	-	5	Y	Y	-	-	15	-
6A/S13	6X6	420	EXIST	-	6	Y	Y	-	-	-	Y
6B/S14	6X6	420	EXIST	-	6	Y	Y	-	-	-	Y
7A	6X40	+5	2-4-2	-	7	Y	Y	-	-	-	-
7B	6X40	+5	2-4-2	-	7	Y	Y	-	-	-	-
8A	6X40	+5	2-4-2	-	8	Y	Y	-	-	-	-

8 Phase Fully Actuated (US 15-501 CLS)
Signal System#: D08 25_PITTSBORO
NOTES

- Refer to "Roadway Standard Drawings NCDOT" dated January 2018, "Standard Specifications for Roads and Structures" dated January 2018, and all applicable sections of the latest version of the generic Project Special Provisions. The PSP can be accessed at the following website:
<https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- Phase 3 and/or phase 7 may be lagged.
- Set all detector units to presence mode.
- Omit "WALK" and flashing "DON'T WALK" with no pedestrian calls.
- Program pedestrian heads to countdown the flashing "Don't Walk" time only.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values shall supersede these values.
- Closed loop system data: Master Asset #10825, Controller Asset #0436.
- All metal poles and pedestrian pedestals to be painted black.
- Re-wire all existing loops back to cabinet.

PHASING DIAGRAM DETECTION LEGEND

- DETECTED MOVEMENT
- UNDETECTED MOVEMENT (OVERLAP)
- UNSIGNALIZED MOVEMENT
- ⇄ PEDESTRIAN MOVEMENT

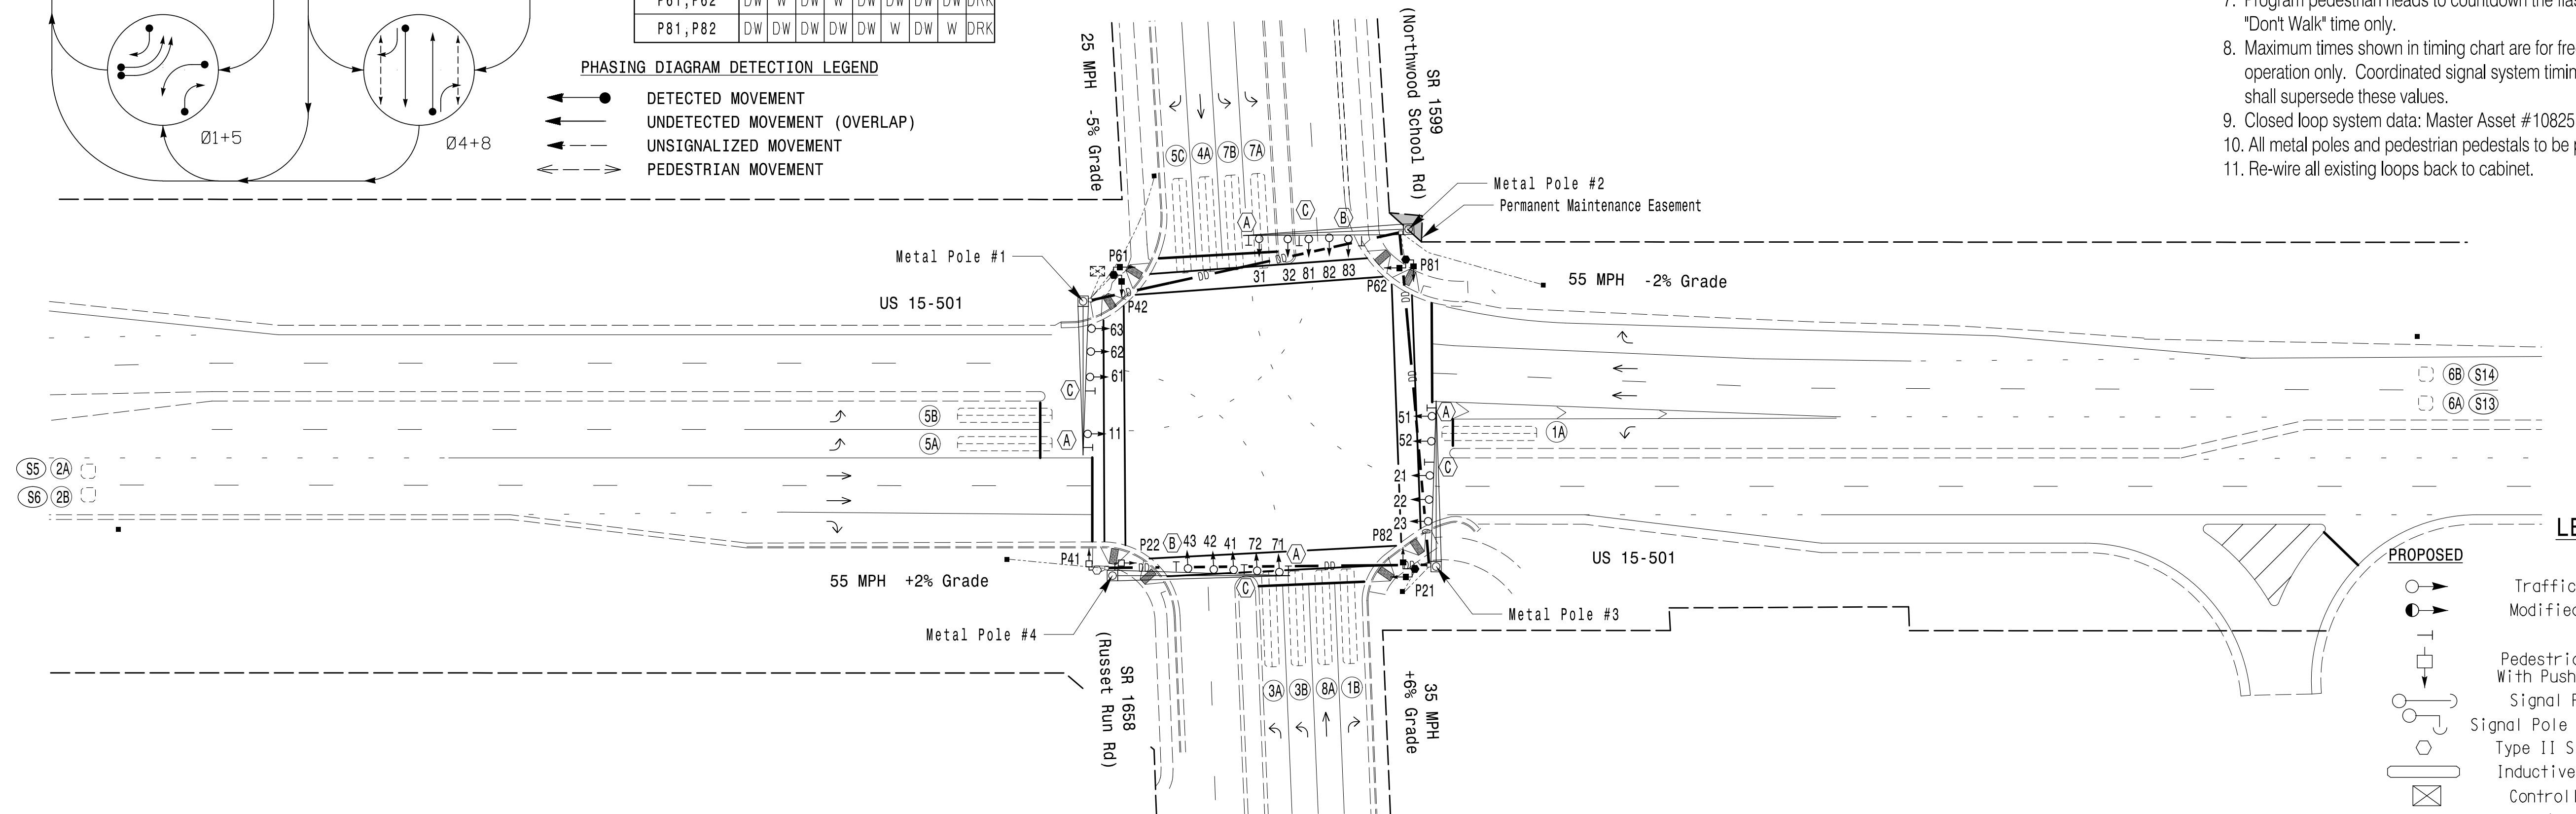

LEGEND


- | PROPOSED | EXISTING |
|--|----------|
| ○ Traffic Signal Head | ● N/A |
| ○ Modified Signal Head | ○ N/A |
| ○ Pedestrian Signal Head With Push Button & Sign | ○ N/A |
| ○ Signal Pole with Guy | ○ N/A |
| ○ Signal Pole with Sidewalk Guy | ○ N/A |
| ○ Type II Signal Pedestal | ○ N/A |
| ○ Inductive Loop Detector | ○ N/A |
| □ Controller & Cabinet | □ N/A |
| □ Junction Box | □ N/A |
| --- 2-in Underground Conduit | --- N/A |
| --- Directional Drill | --- N/A |
| --- Right of Way | --- N/A |
| → Directional Arrow | → N/A |
| --- Curb Ramp | --- N/A |
| Ⓐ "U-TURN YIELD TO RIGHT TURN" Sign (R10-16) | Ⓐ N/A |
| Ⓑ Right Arrow "ONLY" Sign (R3-5R) | Ⓑ N/A |
| Ⓒ Street Name Sign (D3-1) | Ⓒ N/A |

OASIS 2070 TIMING CHART

FEATURE	PHASE							
	1	2	3	4	5	6	7	8
Min Green 1 *	7	14	7	7	7	14	7	7
Extension 1	2.0	6.0	2.0	2.0	2.0	6.0	2.0	2.0
Max Green 1 *	30	120	30	30	25	120	30	25
Yellow Clearance	3.0	5.0	3.0	3.5	3.0	5.4	3.1	3.5
Red Clearance	3.4	1.7	3.7	3.3	3.9	1.7	3.7	2.6
Walk 1 *	-	7	-	7	-	7	-	7
Don't Walk 1	-	23	-	26	-	24	-	27
Seconds Per Actuation *	-	1.5	-	-	-	1.5	-	-
Max Variable Initial *	-	46	-	-	-	46	-	-
Time Before Reduction *	-	15	-	-	-	15	-	-
Time To Reduce *	-	45	-	-	-	45	-	-
Minimum Gap	-	3.4	-	-	-	3.4	-	-
Recall Mode	-	MIN RECALL	-	-	-	MIN RECALL	-	-
Vehicle Call Memory	-	YELLOW	-	-	-	YELLOW	-	-
Dual Entry	-	-	-	-	-	-	-	-
Simultaneous Gap	ON	ON	ON	ON	ON	ON	ON	ON

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

POLE LOCATION DIAGRAM

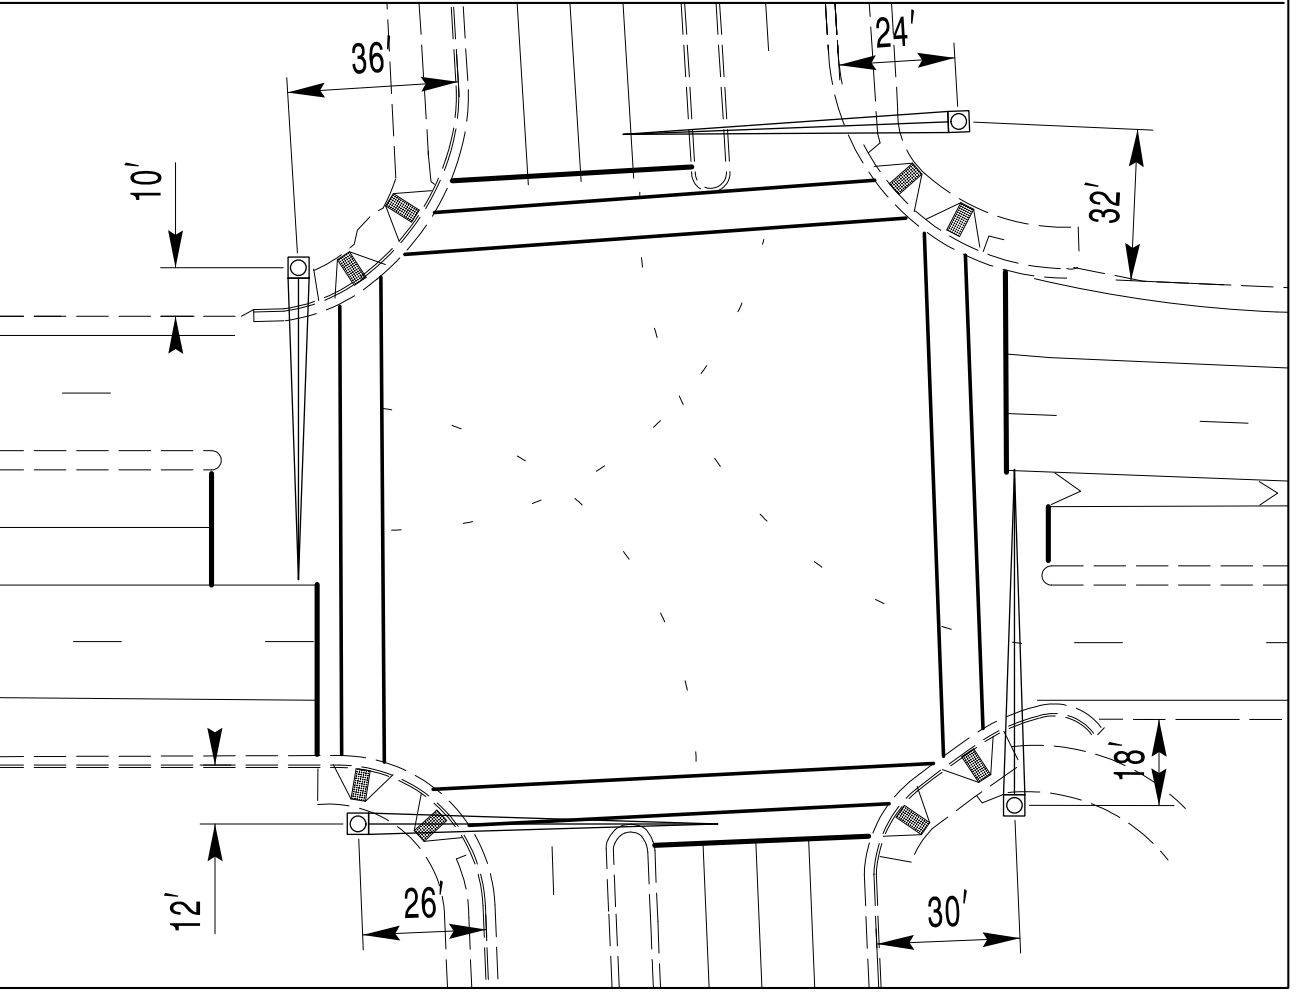

NC Dept of Transportation
 Division of Highways
 Final Drawing Date: 8/23/2022
 Prepared by: *Cheryl Beck*
 ITS & Signals Unit

Signal Upgrade - Final Design


Prepared For: **US 15-501 at SR 1599 (Northwood School Rd.) / SR 1658 (Russet Run Rd.)**
 Division 8 Chatham County Pittsboro
 PLAN DATE: May 2022 REVIEWED BY: KP Baumann
 PREPARED BY: SP Pennington REVIEWED BY:
 REVISIONS: _____ INIT. DATE
 SCALE: 1" = 40'
 PLANS PREPARED IN THE OFFICE OF:
Kimley-Horn
 NC License #F-0102
 421 Fayetteville Street, Suite 600
 Raleigh, NC 27601
 (919) 677-2000

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL
 NORTH CAROLINA PROFESSIONAL ENGINEERS
 SEAL 044434
 KEVIN P. BAUMANN
 DATE 8/10/2022
 SIGNATURE
 DATE
 SIG. INVENTORY NO. 08-0436


8/9/2022 6:15:54 PM susan.pennington ***.imley-horn.com\SE-RAL\MRAL-TIP\DK-SIGNALS\1225040 Chatham - Northwoods Signal\Phase 3\654 - Signal Design\080436-2022.dgn

Design Loading for METAL POLE NO. 1

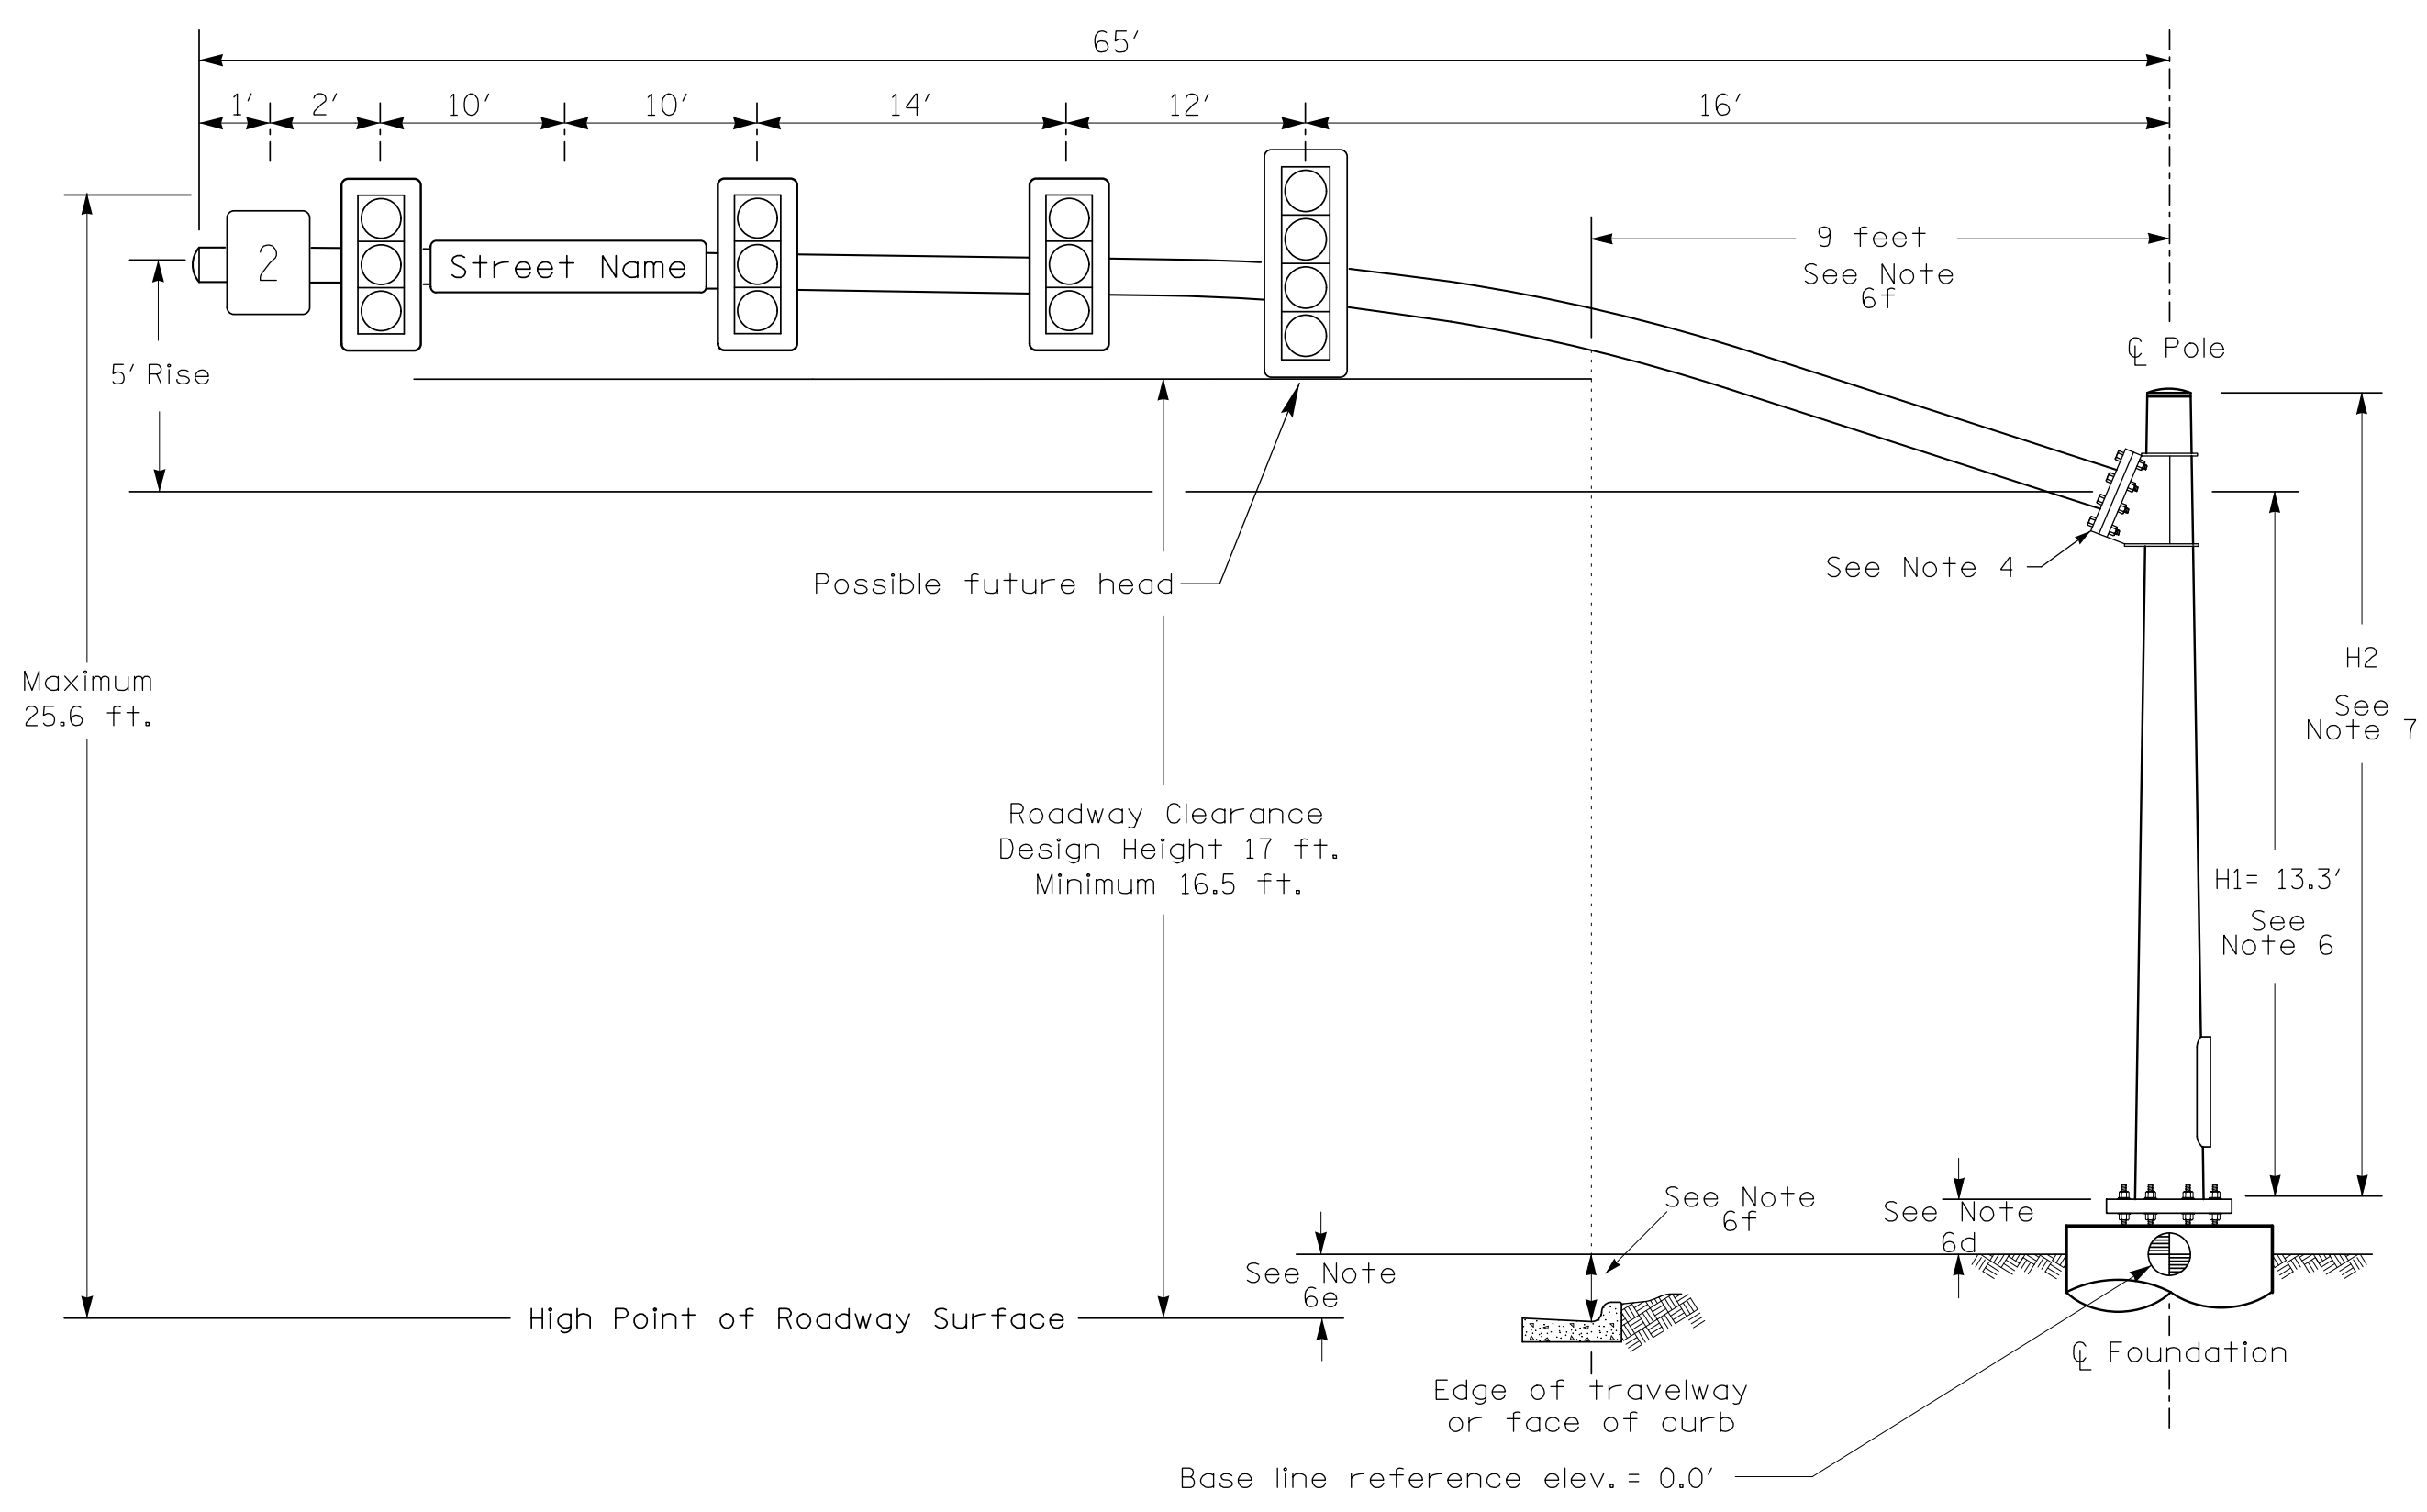

Elevation View

Design Loading for METAL POLE NO. 2

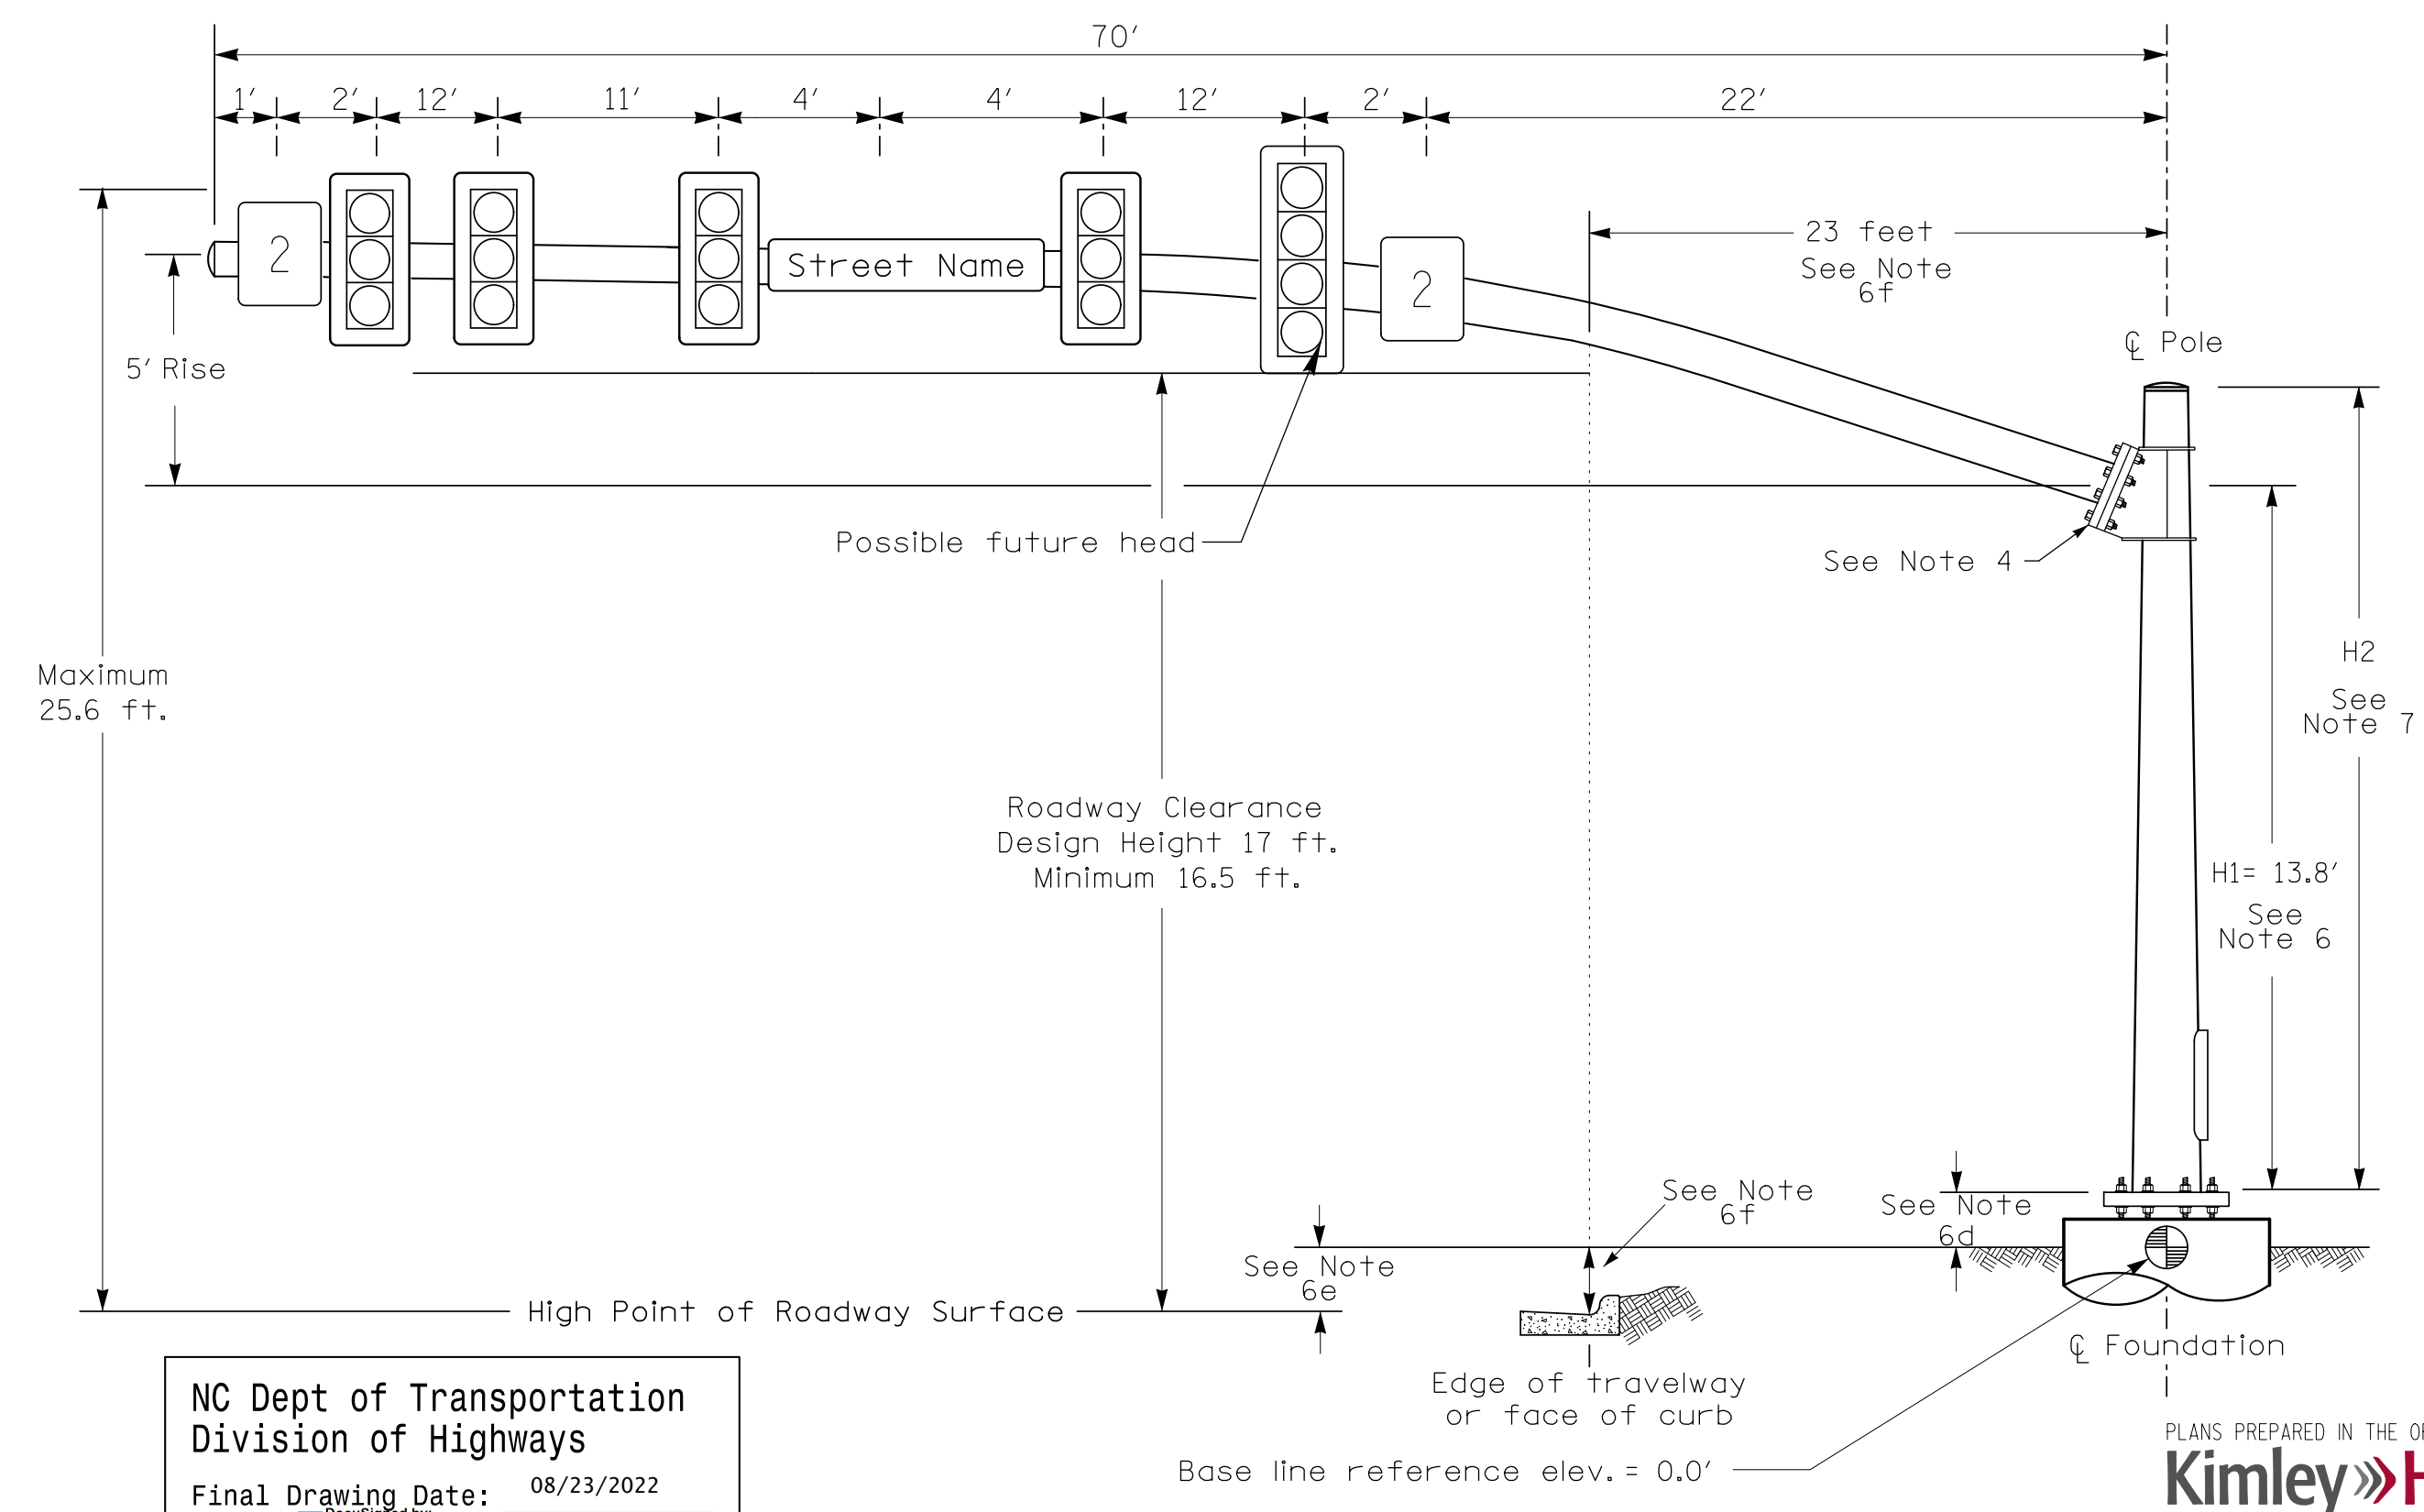

Elevation View

NC Dept of Transportation
Division of Highways
Final Drawing Date: 08/23/2022
Designed by: *Chang Baik*
ITS & Signals Unit


PLANS PREPARED IN THE OFFICE OF:
Kimley»Horn
NC License #F-0102
421 Fayetteville Street, Suite 600
Raleigh, NC 27601
(919) 677-2000

SPECIAL NOTE


The contractor is responsible for verifying that the mast arm attachment height (H1) will provide the "Design Height" clearance from the roadway before submitting final shop drawings for approval. Verify elevation data below which was obtained by field measurement or from available project survey data.

Elevation Data for Mast Arm Attachment (H1)


Elevation Differences for:	Pole 1	Pole 2
Baseline reference point at Foundation @ ground level	0.0 ft.	0.0 ft.
Elevation difference at High point of roadway surface	-0.7 ft.	-0.2 ft.
Elevation difference at Edge of travelway or face of curb	-0.9 ft.	-0.6 ft.

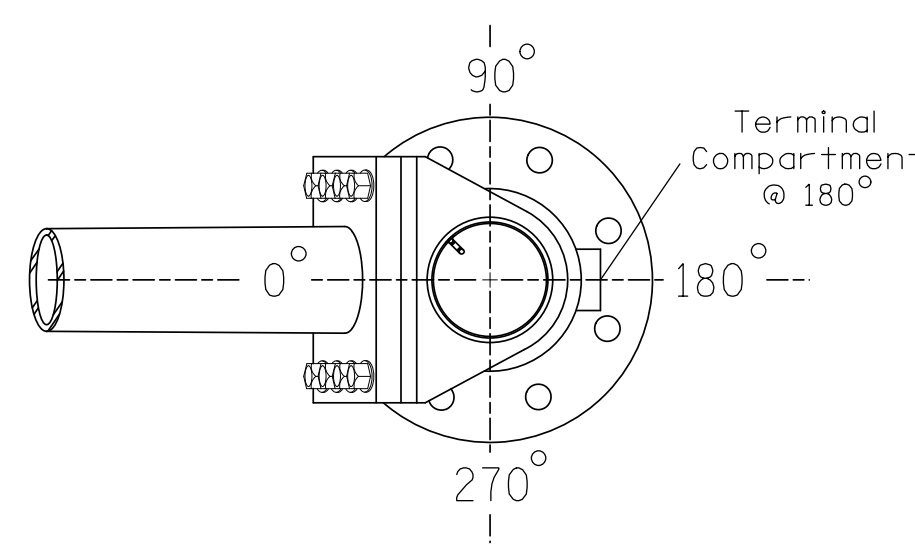

POLE RADIAL ORIENTATION

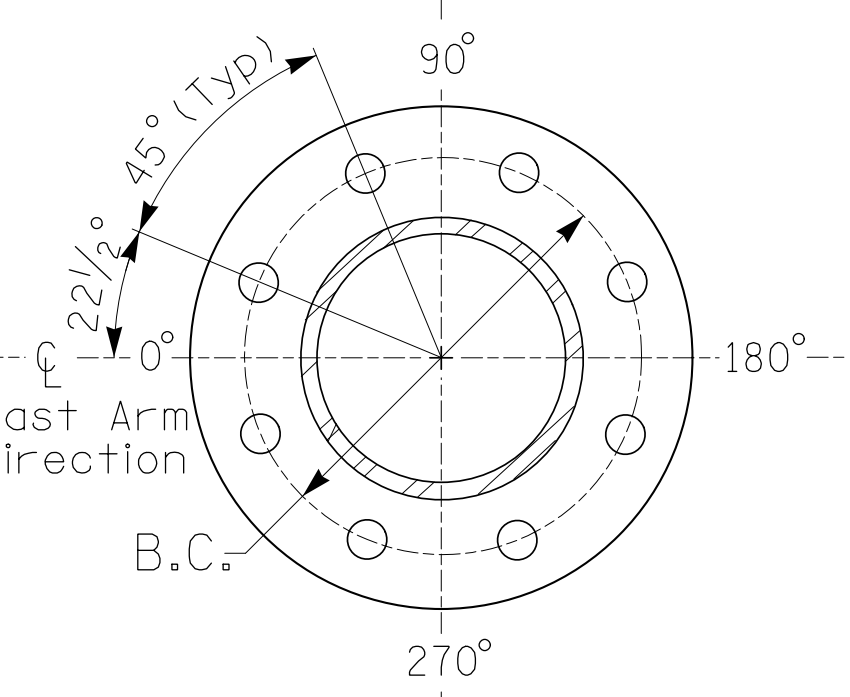

8 BOLT BASE PLATE DETAIL
See Note 5

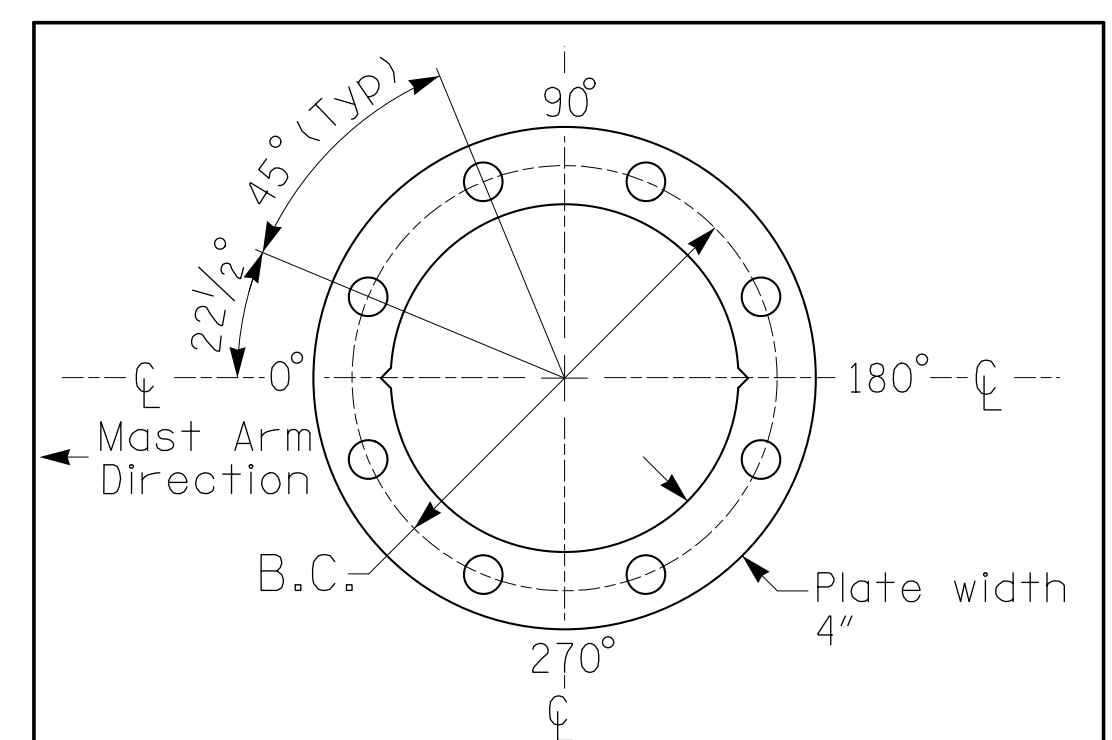

BASE PLATE TEMPLATE & ANCHOR BOLT LOCK PLATE DETAIL
For 8 Bolt Base Plate

METAL POLE No. 1 and 2

PROJECT REFERENCE NO. 36249.3857
SHEET NO. SIG. 2.3

MAST ARM LOADING SCHEDULE

LOADING SYMBOL	DESCRIPTION	AREA	SIZE	WEIGHT
	RIGID MOUNTED SIGNAL HEAD 12"-5 SECTION-WITH BACKPLATE	16.3 S.F.	42.0" W X 56.0" L	103 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5" W X 66.0" L	74 LBS
	RIGID MOUNTED SIGNAL HEAD 12"-3 SECTION-WITH BACKPLATE	9.3 S.F.	25.5" W X 52.5" L	60 LBS
	PEDESTRIAN SIGNAL HEAD WITH MOUNTING HARDWARE	2.2 S.F.	18.5" W X 17.0" L	21 LBS
	SIGN RIGID MOUNTED	7.5 S.F.	30.0" W X 36.0" L	14 LBS
	STREET NAME SIGN RIGID MOUNTED	16.0 S.F.	24.0" W X 96.0" L	36 LBS

NOTES

DESIGN REFERENCE MATERIAL


- Design the traffic signal structure and foundation in accordance with:
 - The 6th Edition 2013 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions.
 - The 2018 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to the specifications can be found in the traffic signal project special provisions.
 - The 2018 NCDOT Roadway Standard Drawings.
 - The traffic signal project plans and special provisions.
 - The NCDOT "Metal Pole Standards" located at the following NCDOT website: <https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>

DESIGN REQUIREMENTS

- Design the traffic signal structure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation.
- Design all signal supports using stress ratios that do not exceed 0.9.
- A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design requirements.
- Design base plate with 8 anchor bolt holes. Provide 2 inch x 60 inch anchor bolts.
- The mast arm attachment height (H1) shown is based on the following design assumptions:
 - Nominal vertical rise in mast arm is 5 feet as measured from the centerline of the arm base to the centerline of the free end of the arm.
 - Signal heads are vertically mounted and vertically centered on the mast arm.
 - The roadway clearance height for design is as shown in the elevation views.
 - The top of the pole base plate is 0.75 feet above the ground elevation.
 - Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground level and the high point of the roadway.
 - Provide horizontal distance from the proposed centerline of the foundation to the edge of travelway. Refer to the Elevation Data Chart for elevation difference between the proposed foundation ground level and the edge of travelway. This information is necessary to ensure that the roadway clearance is maintained at the edge of the travelway and to aid in the camber design of the arm.
- The pole manufacturer will determine the total height (H2) of each pole using the greater of the following:
 - Mast arm attachment height (H1) plus 2 feet, or
 - H1 plus 1/2 of the total height of the mast arm attachment assembly plus 1 foot.
- If pole location adjustments are required, the contractor must gain approval from the Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the Signal Design Section Senior Structural Engineer for assistance at (919) 814-5000.
- The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signal heads over the roadway.
- The contractor is responsible for providing soil penetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.


All metal poles and arms should be black in color as specified in the project special provisions.

NCDOT Wind Zone 4 (90 mph)

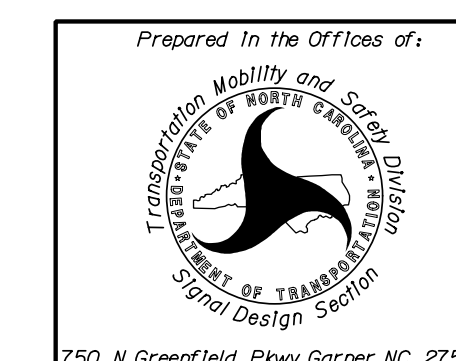

US 15-501
at
SR 1599 (Northwood School Rd.)
/ SR 1658 (Russet Run Rd.)
Division 8 Chatham County Pittsboro
PLANNED BY: SP Pennington
REVIEWED BY: KP Baumann
DATE: May 2022

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

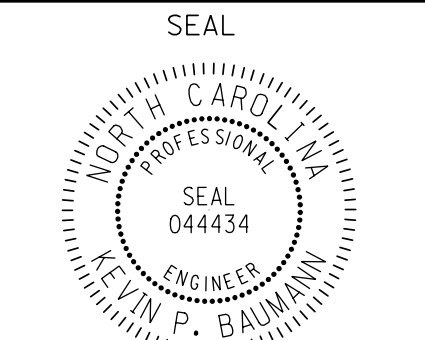


750 N. Greenfield Pkwy, Garner, NC 27529
SCALE: 0 N/A

REVISIONS	INIT.	DATE

DocuSigned by: *Kevin P. Baumann*
8/10/2022
DATE
SIG. INVENTORY NO. 08-0436


8/9/2022 6:16:00 PM susan.pennington ***K:timley-horn.com**E:RALI.MRALL.TPT@SIGNALS.MOT2325040 Chatham - Northwoods Signal@Phase 3K54 - Signal Design@04036-2022mp1.dgn

Design Loading for METAL POLE NO. 3

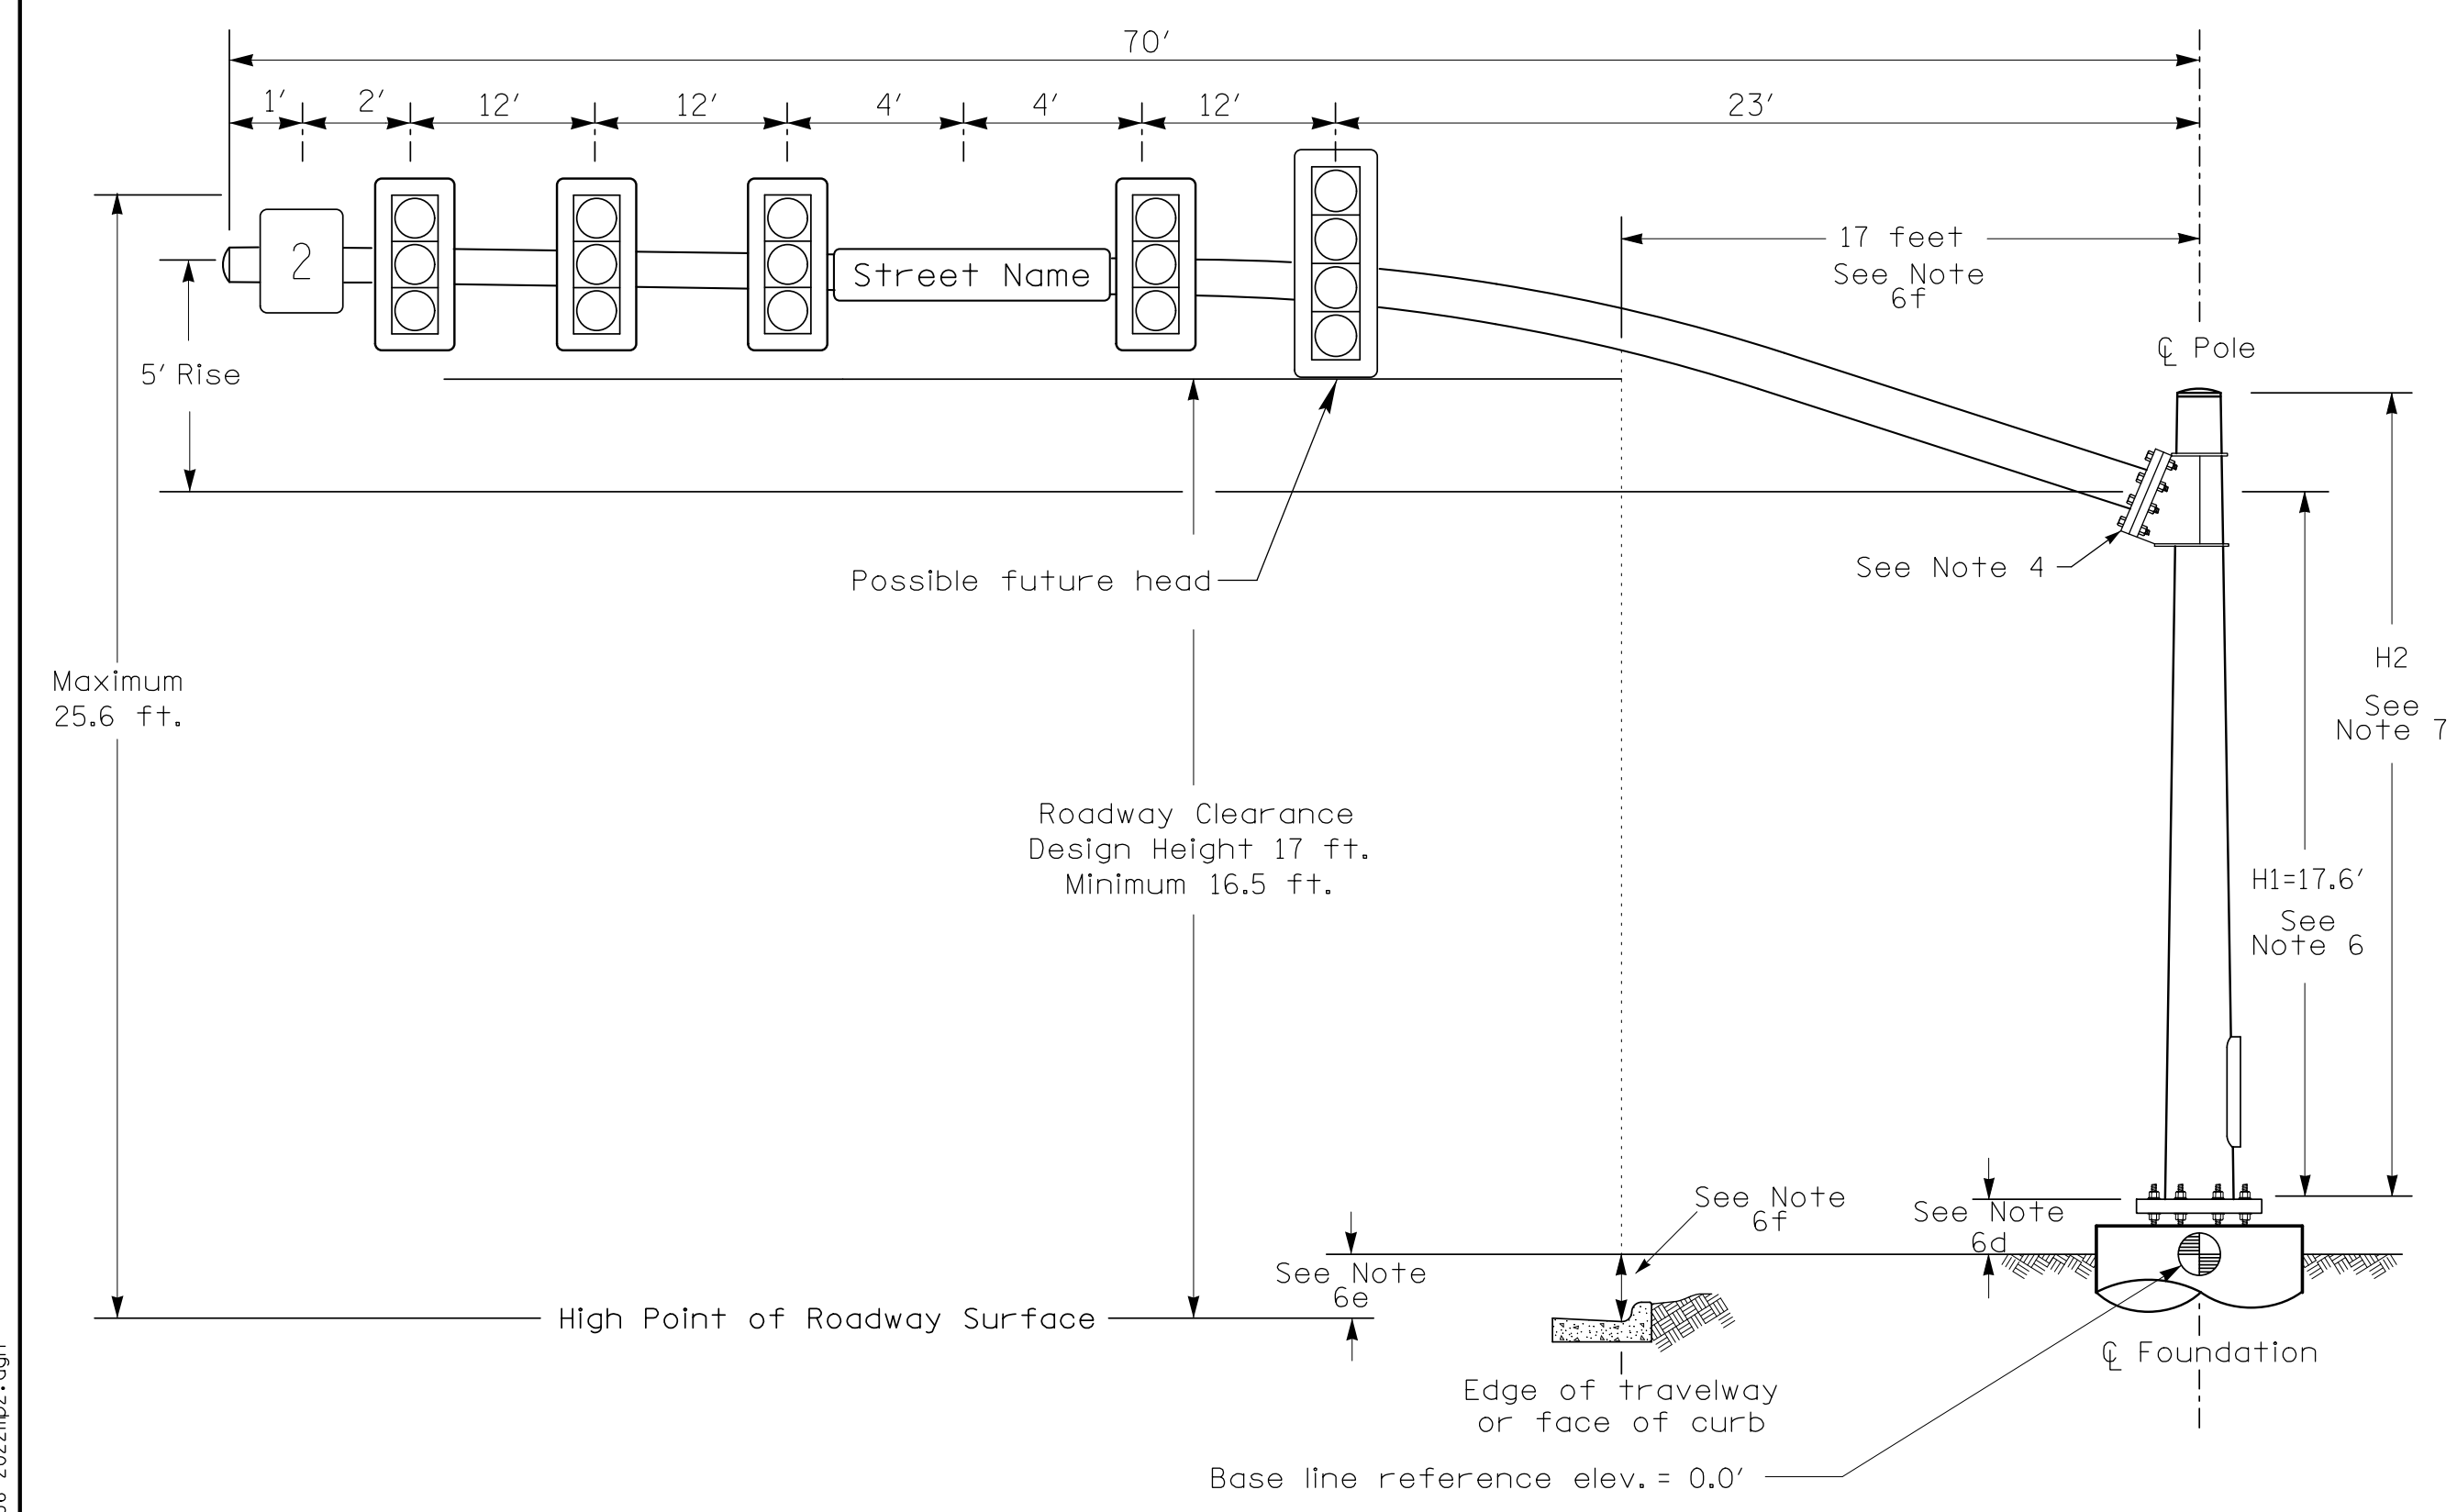

Elevation View

Design Loading for METAL POLE NO. 4

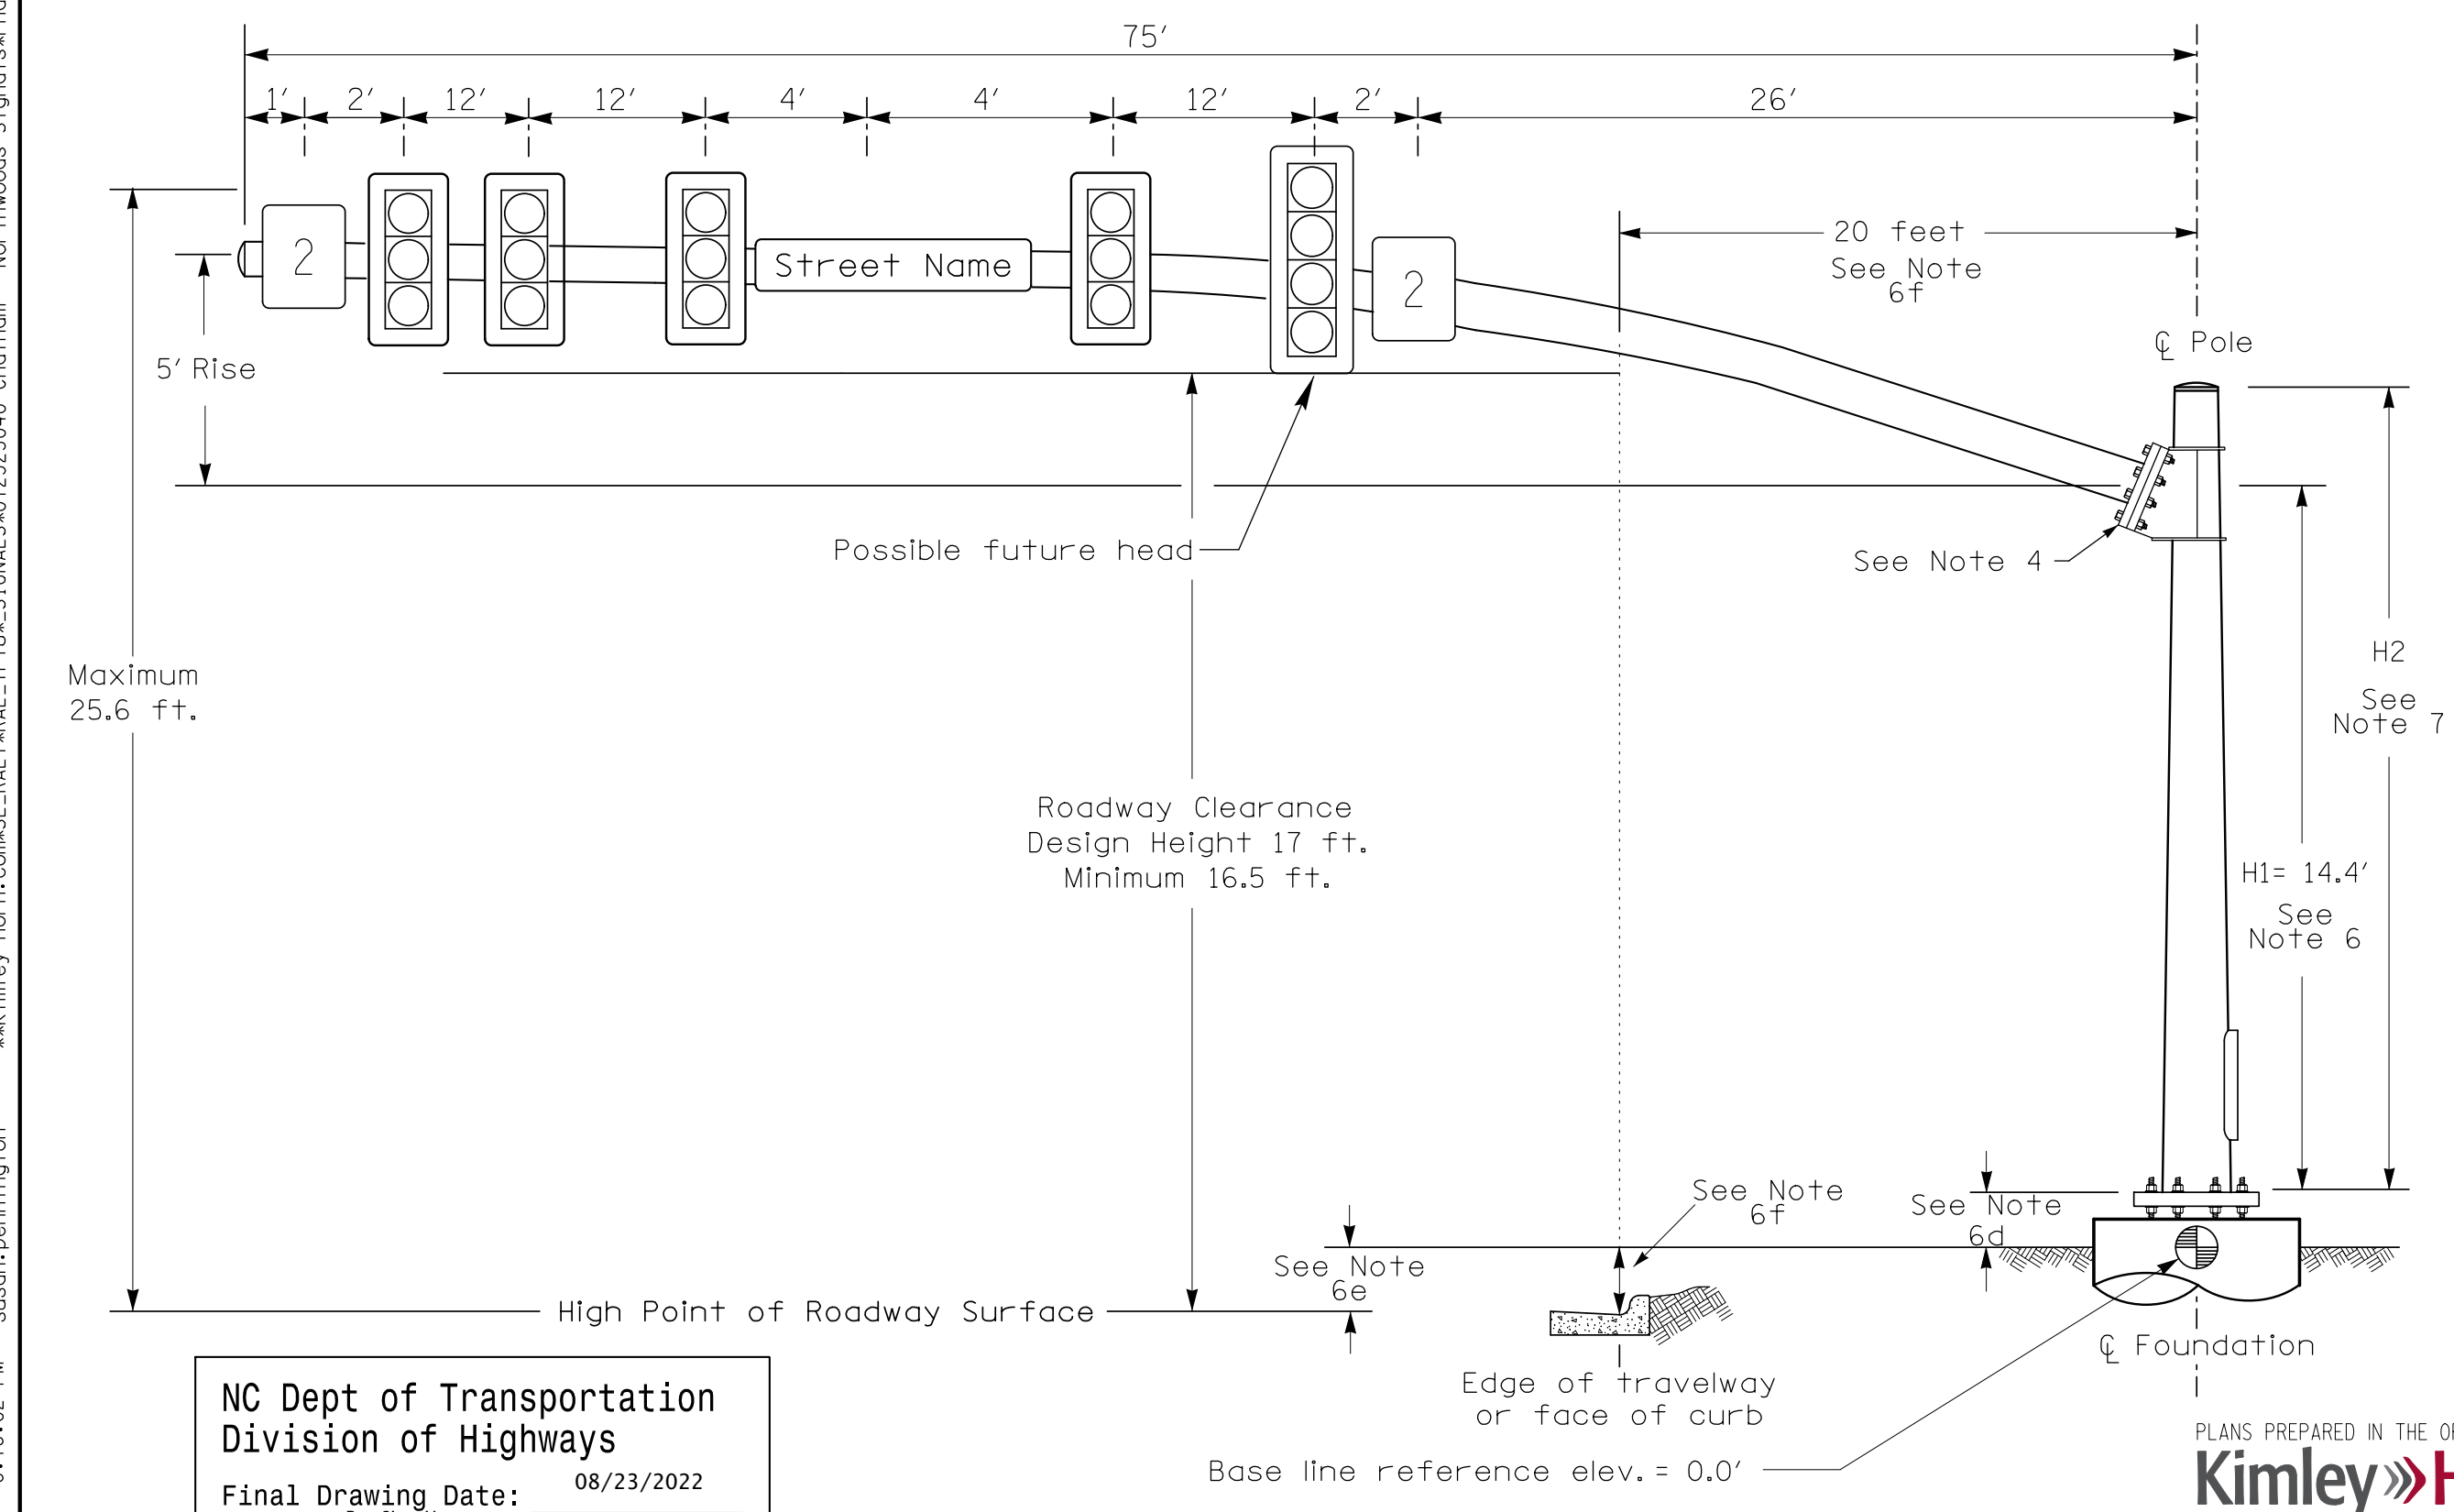


Elevation View


SPECIAL NOTE
 The contractor is responsible for verifying that the mast arm attachment height (H1) will provide the "Design Height" clearance from the roadway before submitting final shop drawings for approval. Verify elevation data below which was obtained by field measurement or from available project survey data.

Elevation Data for Mast Arm Attachment (H1)


Elevation Differences for:	Pole 3	Pole 4
Baseline reference point at Foundation @ ground level	0.0 ft.	0.0 ft.
Elevation difference at High point of roadway surface	+3.6 ft.	+0.4 ft.
Elevation difference at Edge of travelway or face of curb	+0.7 ft.	-0.7 ft.

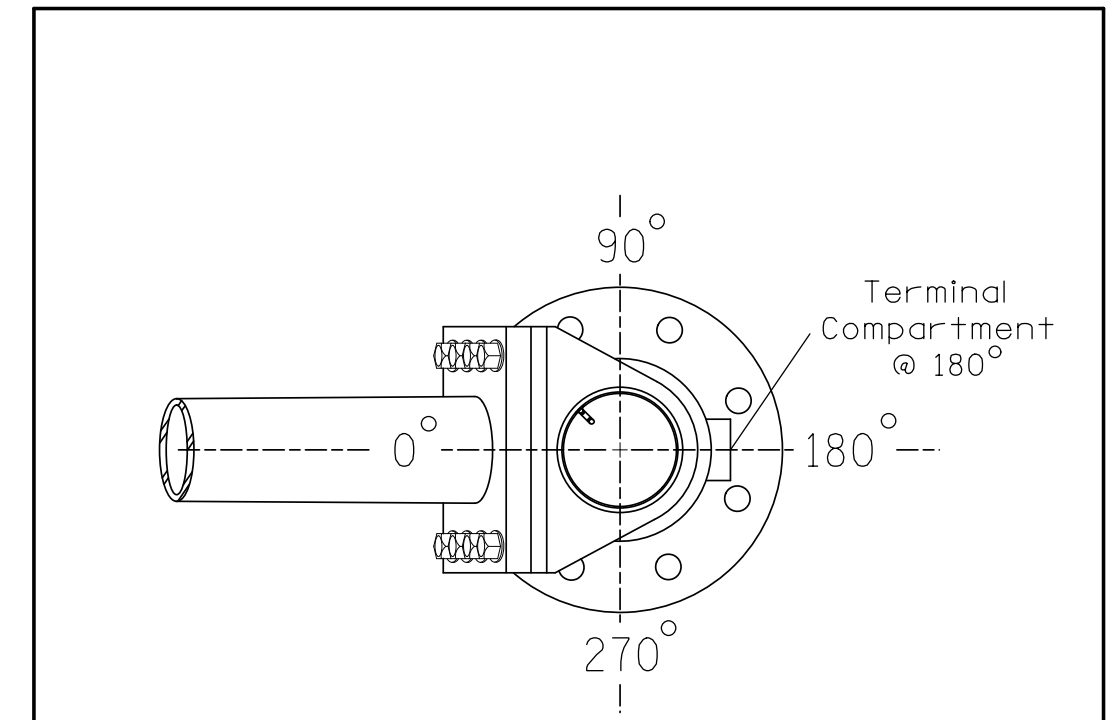

POLE RADIAL ORIENTATION

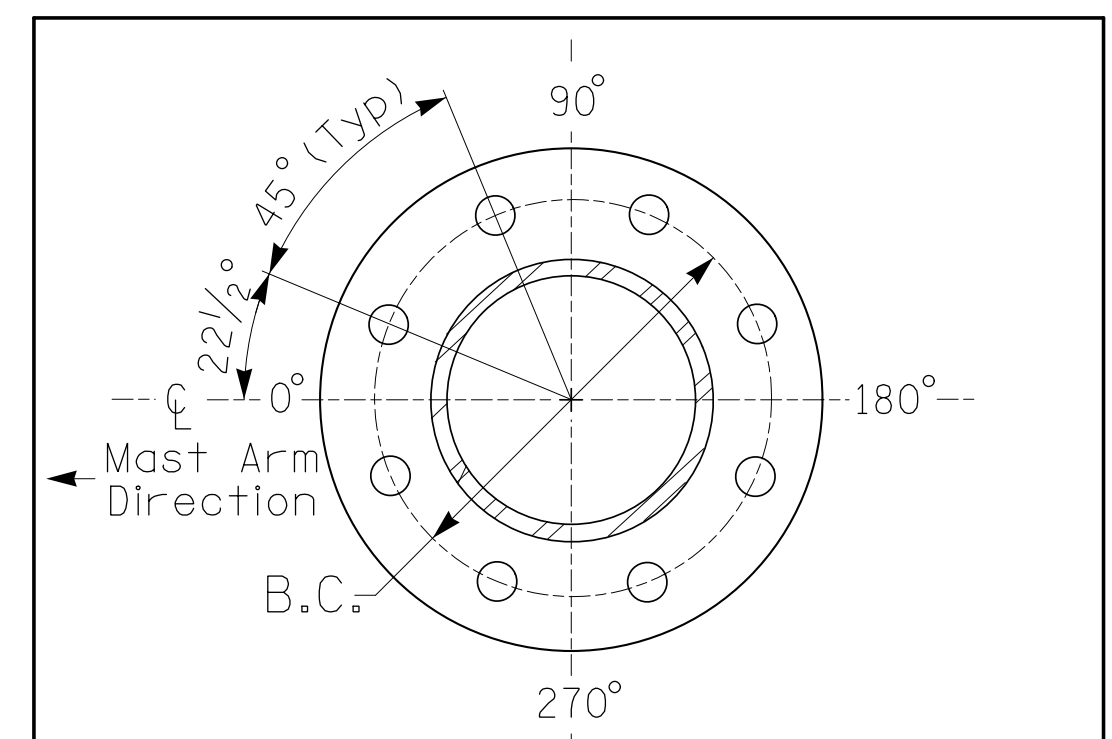

8 BOLT BASE PLATE DETAIL
 See Note 5

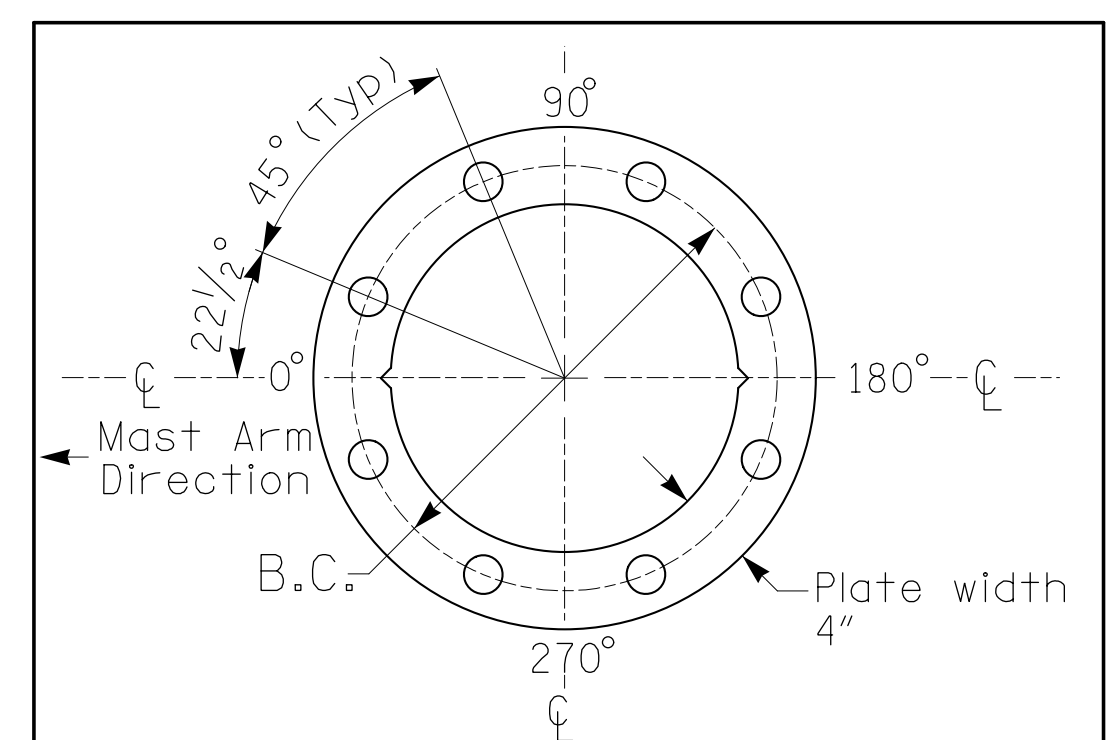

BASE PLATE TEMPLATE & ANCHOR BOLT LOCK PLATE DETAIL
 For 8 Bolt Base Plate

MAST ARM LOADING SCHEDULE

LOADING SYMBOL	DESCRIPTION	AREA	SIZE	WEIGHT
[Symbol]	RIGID MOUNTED SIGNAL HEAD 12"-5 SECTION-WITH BACKPLATE	16.3 S.F.	42.0" W X 56.0" L	103 LBS
[Symbol]	RIGID MOUNTED SIGNAL HEAD 12"-4 SECTION-WITH BACKPLATE	11.5 S.F.	25.5" W X 66.0" L	74 LBS
[Symbol]	RIGID MOUNTED SIGNAL HEAD 12"-3 SECTION-WITH BACKPLATE	9.3 S.F.	25.5" W X 52.5" L	60 LBS
[Symbol]	PEDESTRIAN SIGNAL HEAD WITH MOUNTING HARDWARE	2.2 S.F.	18.5" W X 17.0" L	21 LBS
[Symbol]	SIGN RIGID MOUNTED	7.5 S.F.	30.0" W X 36.0" L	14 LBS
[Symbol]	STREET NAME SIGN RIGID MOUNTED	16.0 S.F.	24.0" W X 96.0" L	36 LBS

NOTES

DESIGN REFERENCE MATERIAL

- Design the traffic signal structure and foundation in accordance with:
 - The 6th Edition 2013 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, including all of the latest interim revisions.
 - The 2018 NCDOT "Standard Specifications for Roads and Structures." The latest addenda to the specifications can be found in the traffic signal project special provisions.
 - The 2018 NCDOT Roadway Standard Drawings.
 - The traffic signal project plans and special provisions.
 - The NCDOT "Metal Pole Standards" located at the following NCDOT website: <https://connect.ncdot.gov/resources/safety/Pages/ITS-Design-Resources.aspx>

DESIGN REQUIREMENTS

- Design the traffic signal structure using the loading conditions shown in the elevation views. These are anticipated worst case "design loads" and may not represent the actual loads that will be applied at the time of the installation. The contractor should refer to the traffic signal plans for the actual loads that will be applied at the time of the installation.
- Design all signal supports using stress ratios that do not exceed 0.9.
- A clamp-type bolted mast arm-to-pole connection may be used instead of the welded ring stiffened box connection shown as long as the connection meets all of the design requirements.
- Design base plate with 8 anchor bolt holes. Provide 2 inch x 60 inch anchor bolts.
- The mast arm attachment height (H1) shown is based on the following design assumptions:
 - Nominal vertical rise in mast arm is 5 feet as measured from the centerline of the arm base to the centerline of the free end of the arm.
 - Signal heads are vertically mounted and vertically centered on the mast arm.
 - The roadway clearance height for design is as shown in the elevation views.
 - The top of the pole base plate is 0.75 feet above the ground elevation.
- Refer to the Elevation Data Chart for the elevation differences between the proposed foundation ground level and the high point of the roadway.
 - Provide horizontal distance from the proposed centerline of the foundation to the edge of travelway. Refer to the Elevation Data Chart for elevation difference between the proposed foundation ground level and the edge of travelway. This information is necessary to ensure that the roadway clearance is maintained at the edge of the travelway and to aid in the camber design of the arm.
- The pole manufacturer will determine the total height (H2) of each pole using the greater of the following:
 - Mast arm attachment height (H1) plus 2 feet, or
 - H1 plus 1/2 of the total height of the mast arm attachment assembly plus 1 foot.
- If pole location adjustments are required, the contractor must gain approval from the Engineer as this may affect the mast arm lengths and arm attachment heights. The contractor may contact the Signal Design Section Senior Structural Engineer for assistance at (919) 814-5000.
- The contractor is responsible for verifying that the mast arm length shown will allow proper positioning of the signal heads over the roadway.
- The contractor is responsible for providing soil penetration testing data (SPT) to the pole manufacturer so site specific foundations can be designed.

All metal poles and arms should be black in color as specified in the project special provisions.

NCDOT Wind Zone 4 (90 mph)

Prepared in the Office of:
 Transportation Mobility and Safety Division
 STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 Signal Design Section

US 15-501 at Northwood School Rd. / SR 1658 (Russet Run Rd.)
 Division 8 Chatham County Pittsboro

PLANNED DATE: May 2022 REVIEWED BY: KP Baumann
 PREPARED BY: SP Pennington REVIEWED BY:

750 N. Greenfield Pkwy, Garner, NC 27529

SCALE: 0 N/A

REVISIONS: [Table with columns for REVISIONS, INIT., DATE]

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SEAL: NORTH CAROLINA PROFESSIONAL ENGINEER SEAL 044434 KEVIN P. BAUMANN

DocuSigned by: [Signature] 8/10/2022

SIG. INVENTORY NO. 08-0436

NC Dept of Transportation
 Division of Highways
 Final Drawing Date: 08/23/2022
 Drawn by: Chang Baik
 ITS & Signals Unit

PLANS PREPARED IN THE OFFICE OF:
Kimley-Horn
 NC License #F-0102
 421 Fayetteville Street, Suite 600
 Raleigh, NC 27601
 (919) 677-2000

8/9/2022 6:16:02 PM susan.pennington ***K:\mly-horn.com\SE-BALI\MRAL\TPT*.SIGNALS\M012325040 ChattHam - Northwoods Signal\Phase 3\K4 - Signal Design\04-36-2022\mp2.dgn